MZ8810 / MZ8810C



Triple-Balanced Mixer

Rev. V3

Features

- LO 2 TO 18 GHz
- RF 2 TO 18 GHz
- IF 1 TO 8 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- MINIATURE PACKAGE
- WIDE BANDWIDTH
- AVAILABLE WITH FIELD REPLACEABLE **CONNECTORS**


Description

The MZ8810 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult

Ordering Information

| Part Number | Package |
|-------------|-------------------|
| MZ8810 | Versapac |
| MZ8810C | SMA Connectorized |

Product Image

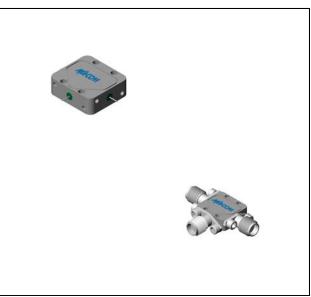

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter application only)

| Parameter Test Conditions | | Units | Typical | Guaranteed | |
|--|---|------------|------------|-------------|---------------|
| | | | | +25°C | -54º to +85ºC |
| SSB Conversion Loss (max) & SSB Noise Figure (max) | fR = 3 to 10 GHz, fL = 2 to 15 GHz, fI = 1 to 5 GHz fR = 2 to 18 GHz, fL = 2 to 18 GHz, fI = 1 to 18 GHz | dB dB | 7.5 | 9.0 11.0 | 9.5 11.5 |
| Isolation, L to R (min) | fL = 2 to 18 GHz | dB | 25 | 15 | 13 |
| Isolation, L to I (min) | fL = 2 to 18 GHz | dB | 28 | 16 | 14 |
| 1 dB Conversion Comp. | fL = +10 dBm | dBm | +6 | | |
| Input IP3 | fR1 = 3 GHz at -10 dBm, fR2 = 3.01 GHz at -10 dBm, fL = 5 GHz at +10 dBm fR1 = 17.99 GHz at -10 dBm, fR2 = 18 GHz at -10 dBm, fL = 14 GHz at +10 dBm | dBm dBm | +15 +13 | | |





Triple-Balanced Mixer


Rev. V3


Typical Performance Curves

Conversion Loss vs. Frequency

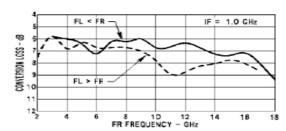

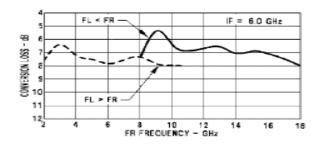


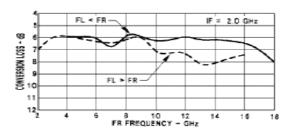

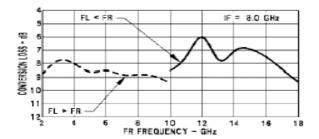


IF = 3.0 GHz CONVERSION LOSS - dB FL > FR 12 8 10 12 FR FREQUENCY - GHz

Conversion Loss vs. LO Power

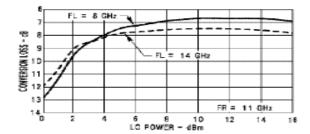


Conversion Loss vs. Frequency

Commitment to produce in volume is not guaranteed.

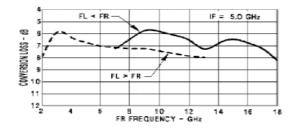

L-Port VSWR vs. Frequency

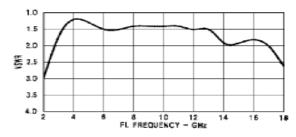

2

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588

MZ8810 / MZ8810C




Triple-Balanced Mixer


Rev. V3

Absolute Maximum Ratings


| Parameter | Absolute Maximum | | |
|-----------------------|---|--|--|
| Operating Temperature | -54°C to +100°C | | |
| Storage Temperature | -65°C to +100°C | | |
| Peak Input Power | +26 dBm max @ +25°C +23 dBm max @ +100°C | | |
| Peak Input Current | mA DC | | |

Isolation vs. Frequency

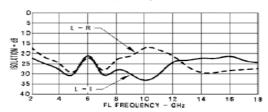

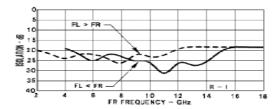


R-Port VSWR vs. Frequency

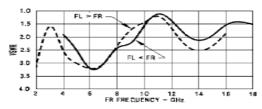


I-Port VSWR vs. Frequency

Commitment to produce in volume is not guaranteed.

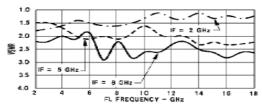


Outline Drawing: Versapac

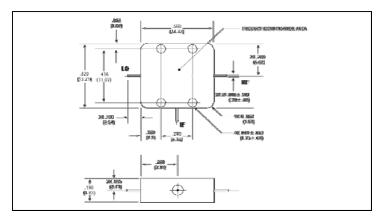

Weight: 4 grams (0.14 oz.) max

Outline Drawing: SMA Connectorized *

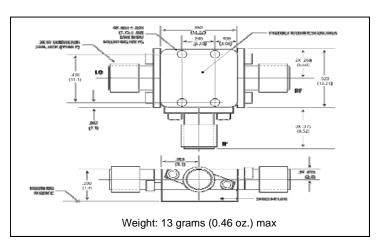

Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

3

- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.