


※ 型号描述 How to Order

XB-FA-□□□-□□□

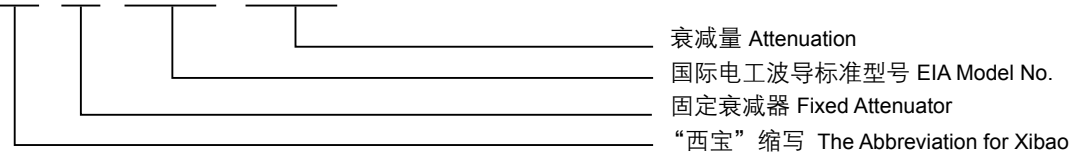

※ 型号及指标 Model & Specifications

| 新型号 Model | 频率范围 Freq (GHz) | 法兰 Flange | 驻波 VSWR (Max) | 可选衰减量 Attenuation (dB) | 最大功率 Max Power (W) | 尺寸 L Length (mm) |
|--------------|--------------------|--------------|------------------|---------------------------|-----------------------|---------------------|
| XB-FA430-□□ | 1.72~2.61 | FDP/FDM | ≤1.10 | 3~30 | 20 | 400 |
| XB-FA340-□□ | 2.17~3.30 | FDP/FDM | ≤1.10 | 3~30 | 20 | 400 |
| XB-FA284-□□ | 2.60~3.95 | FDP/FDM | ≤1.10 | 3~30 | 20 | 300 |
| XB-FA229-□□ | 3.22~4.90 | FDP/FDM | ≤1.10 | 3~30 | 10 | 250 |
| XB-FA187-□□ | 3.94~5.99 | FDP/FDM | ≤1.10 | 3~30 | 10 | 200 |
| XB-FA159-□□ | 4.64~7.05 | FDP/FDM | ≤1.10 | 3~30 | 10 | 150 |
| XB-FA137-□□ | 5.38~8.17 | FDP/FDM | ≤1.10 | 3~30 | 5 | 150 |
| XB-FA112-□□ | 6.57~9.99 | FBP/FBM/FBE | ≤1.10 | 3~30 | 5 | 125 |
| XB-FA90-□□ | 8.20~12.40 | FBP/FBM/FBE | ≤1.10 | 3~30 | 5 | 100 |
| XB-FA75-□□ | 9.84~15.0 | FBP/FBM/FBE | ≤1.10 | 3~30 | 3 | 75 |
| XB-FA62-□□ | 11.9~18.0 | FBP/FBM/FBE | ≤1.10 | 3~30 | 2 | 75 |
| XB-FA51-□□ | 14.5~22.0 | FBP/FBM/FBE | ≤1.10 | 3~30 | 2 | 75 |
| XB-FA42-□□ | 18.0~26.5 | FBP/FBM/FBE | ≤1.10 | 3~30 | 2 | 50 |
| XB-FA34-□□ | 21.7~33.0 | FBP/FBM/FBE | ≤1.10 | 3~30 | 1 | 50 |
| XB-FA28-□□ | 26.5~40.0 | FBP/FBM/FBE | ≤1.10 | 3~30 | 1 | 50 |
| XB-FA22-□□ | 33.0~50.0 | UG383/U | ≤1.15 | 3~30 | 0.5 | 50 |
| XB-FA19-□□ | 39.2~59.6 | UG383/U-Mod | ≤1.15 | 3~30 | 0.5 | 50 |
| XB-FA15-□□ | 50.0~75.0 | UG-385/U-Mod | ≤1.15 | 3~30 | 0.5 | 50 |
| XB-FA12-□□ | 60.5~91.9 | UG-387/U-Mod | ≤1.15 | 3~30 | 0.5 | 50 |
| XB-FA10-□□ | 75.0~110 | UG-387/U-Mod | ≤1.15 | 3~30 | 0.5 | 50 |

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)
 ※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)