



Biased Detector With 50 Ohm SMA Male to SMA Female
 Video Out Operating From 8 GHz to 18 GHz

TECHNICAL DATA SHEET

PE8008

Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 8 GHz to 18 GHz

Configuration

| | |
|------------------------|------------|
| Bias Type | Biased |
| Detector Polarity | Negative |
| Body Style | Straight |
| RF Input Connector | SMA Male |
| RF Input Impedance | 50 Ohms |
| Video Output Connector | SMA Female |

Electrical Specifications

| | |
|-------------------------------|---------|
| Frequency Range, GHz | 8 to 18 |
| Voltage Sensitivity, mV/mW | 1,600 |
| Tangential Signal Sensitivity | -52 |
| Flatness, dB | 0.7 |
| Maximum Input Power, Watts | 23 |
| Video Capacitance, pF | 10 |

Mechanical Specifications

Temperature

| | |
|------------------------|-------------|
| Operating Range, deg C | -55 to +125 |
| Storage Range, deg C | -65 to +150 |

RF Input

| | |
|----------------|----------|
| Type | SMA Male |
| Hex Size, Inch | 5/16 |

Video Output

| | |
|------|------------|
| Type | SMA Female |
|------|------------|

Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

Plotted and Other Data

| | |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 8 GHz to 18 GHz PE8008](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





Biased Detector With 50 Ohm SMA Male to SMA Female
Video Out Operating From 8 GHz to 18 GHz

TECHNICAL DATA SHEET

PE8008

Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 8 GHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 8 GHz to 18 GHz PE8008](http://www.pasternack.com/negative-biased-schottky-diode-detector-80-180-ghz-pe8008-p.aspx)

URL: <http://www.pasternack.com/negative-biased-schottky-diode-detector-80-180-ghz-pe8008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8008 CAD Drawing

Biased Detector With 50 Ohm SMA Male to SMA Female
Video Out Operating From 8 GHz to 18 GHz

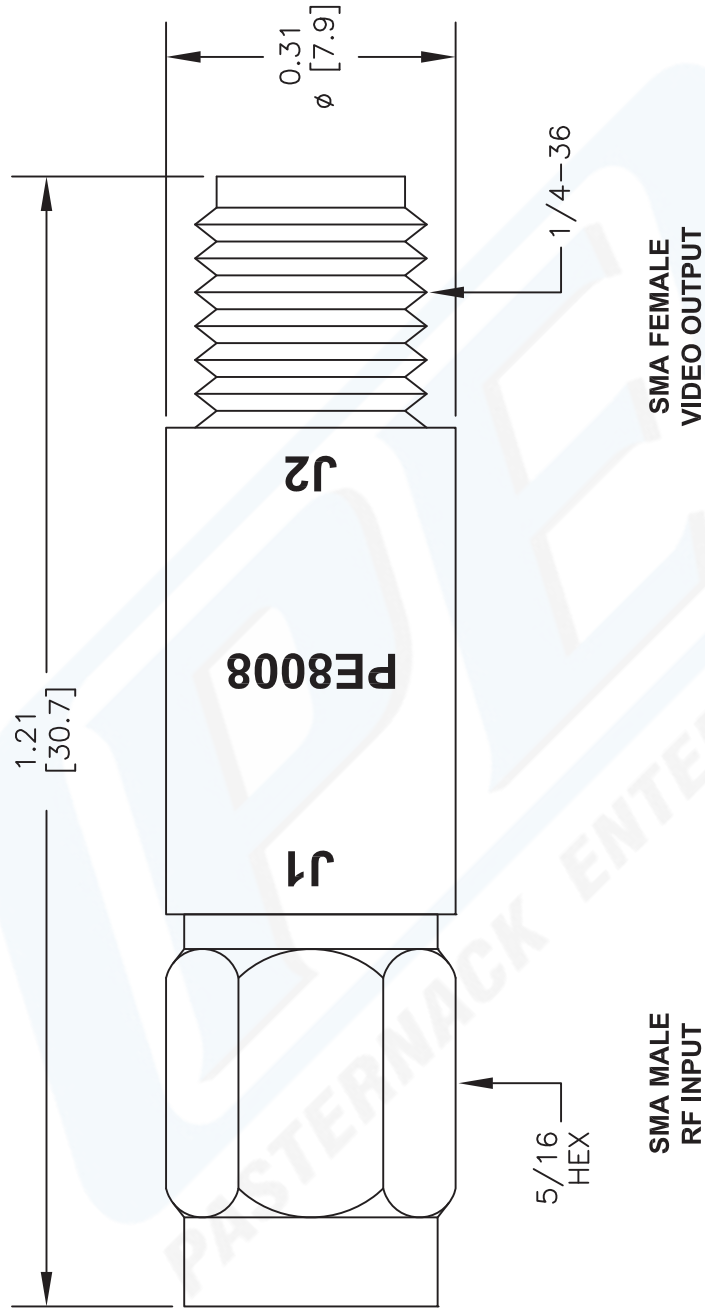

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8008

FSCM NO. 53919

CAD FILE 020413

SCALE N/A

SIZE A

2233

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com