
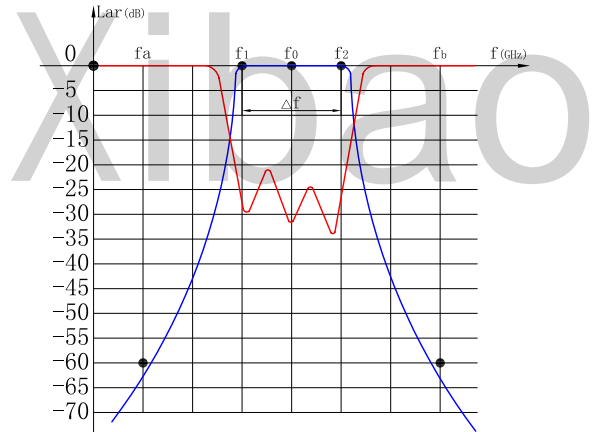


3. 波导带通滤波器 --- 阻带衰减 60dB
(Band Pass Filter - Attenuation 60dB)

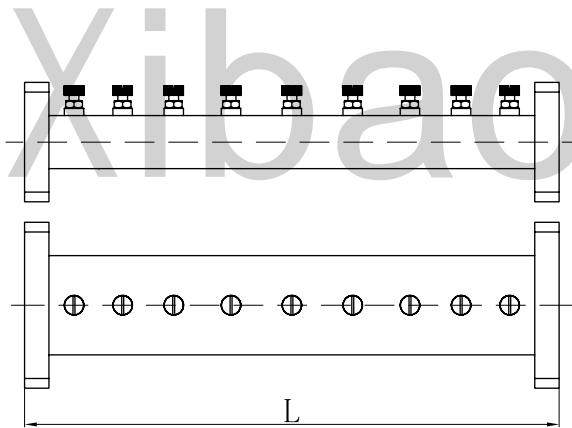

XB-BPF-60dB带通滤波器特性曲线图

型号 Model	频率范围 Frequency (GHz)	带宽 Bandwidth(%)	插损 IL (dB)	通带 VSWR	阻带衰减 Attenuation (≥ dB)	连接法兰 Flange	外形尺寸 Length (mm)
XB-WBPF650-60	1.14 ~ 1.79	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	1100
XB-WBPF510-60	1.45 ~ 2.20	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	900
XB-WBPF430-60	1.72 ~ 2.61	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	800
XB-WBPF340-60	2.17 ~ 3.30	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	650
XB-WBPF284-60	2.60 ~ 3.95	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	520
XB-WBPF229-60	3.22 ~ 4.90	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	450
XB-WBPF187-60	3.94 ~ 5.99	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	360
XB-WBPF159-60	4.46 ~ 7.05	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	300
XB-WBPF137-60	5.38 ~ 8.17	1 ~ 10	≤ 0.3	≤ 1.25	60	FDP/FDM	240
XB-WBPF112-60	6.57 ~ 9.99	1 ~ 10	≤ 0.3	≤ 1.25	60	FBP/FBM/FBE	220
XB-WBPF90-60	8.20 ~ 12.5	1 ~ 10	≤ 0.35	≤ 1.25	60	FBP/FBM/FBE	190
XB-WBPF75-60	9.84 ~ 15.0	1 ~ 10	≤ 0.35	≤ 1.25	60	FBP/FBM/FBE	150
XB-WBPF62-60	11.9 ~ 18.0	1 ~ 10	≤ 0.4	≤ 1.25	60	FBP/FBM/FBE	130
XB-WBPF51-60	14.5 ~ 22.0	1 ~ 10	≤ 0.4	≤ 1.25	60	FBP/FBM/FBE	110
XB-WBPF42-60	18.0 ~ 26.5	1 ~ 10	≤ 0.5	≤ 1.25	60	FBP/FBM/FBE	90
XB-WBPF34-60	21.7 ~ 33.0	1 ~ 10	≤ 0.5	≤ 1.25	60	FBP/FBM/FBE	80
XB-WBPF28-60	26.5 ~ 40.0	1 ~ 10	≤ 0.5	≤ 1.25	60	FBP/FBM/FBE	70
XB-WBPF22-60	33.0 ~ 50.0	1 ~ 10	≤ 0.5	≤ 1.25	60	UG383/U	60
XB-WBPF19-60	39.2 ~ 59.6	1 ~ 10	≤ 0.5	≤ 1.25	60	UG383/U-Mod	55