



Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1	Dimensions are in Millimeters	
	Revisions Description/Approved/Date 	Approved M.H. M.H. K.R.E.
NOTES (plating thickness in microinches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19488 6. Per ZZ-R-765 7. Per WW-1-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

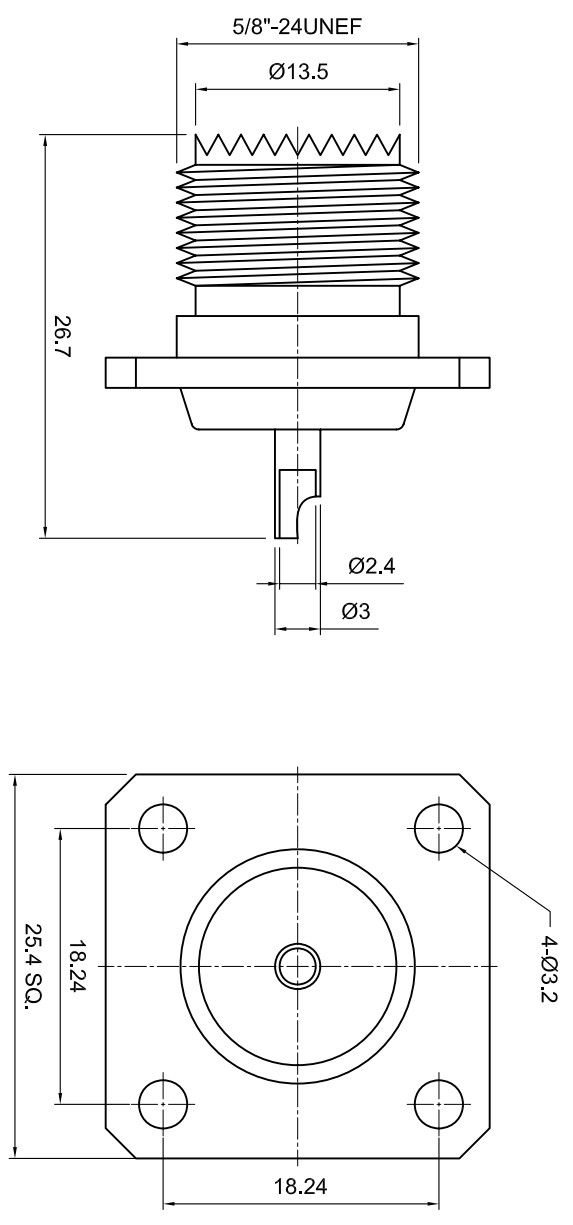

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: USF42NT
Connector Body	Brass, Note 1	Nickel, Note 9	
Center Contact: Female	Brass, Note 1	Gold, Note 11	
Insulation	Teflon	None	
Ferrule	--	--	
Gasket	--	None	Description UHF panel jack with solder cup termination.
Hex Nut	--	--	Nickel plated brass body, delrin dielectric.
Lock Washer	--	--	Scale 2:1 Drawing No. UHF/USF42NT File Name USF42NT