



## 50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz

### Noise Generators Technical Data Sheet

PE85N1022

#### Features

- 1.0 GHz to 18.0 GHz Frequency Range
- Output Noise ENR 15 dB min
- Flatness 2.0 dB typ
- 28 VDC Operation
- Small Size 1.25" by 0.75" by 0.50"

#### Applications

- Measure Noise Figure
- Signal Strength Calibrators
- Radar
- Jamming
- SATCOM for BER and NF
- Source of Jitter

#### Description

The PE85N1022 is a coaxial Noise Source with 15 dB min of Output Noise ENR. The Unit features flatness better than +/- 1.5 dB over the frequency range 1.0 GHz to 18.0 GHz. The unit has an BNC Female DC Input Connector and an SMA Female RF Output Connector. Standard operation is from +28 Vdc with a 20 mA maximum current draw. The Noise Source ideal for noise figure measurements and built in test applications. The unit features a small profile housing of 1.25" by 0.75" by 0.50" excluding connectors, ideal when space is at a premium.

#### Electrical Specifications

##### RF Characteristics

Description	Minimum	Typical	Maximum	Units
Frequency Range	1		18	GHz
Impedance		50		Ohms
Output ENR	15			dB
Flatness		±1.5		dB
VSWR			1.5:1	
Output Variation vs Input Voltage			0.1	dB/%V
Output Variation vs Temperature			0.01	dB/deg C
Bias Voltage 1		28		Volts
Input Current 1			25	mA
Calibration Points		1 GHz Step		

#### Mechanical Specifications

##### Size

Length	1.25 in [31.75 mm]
Width/Dia.	0.75 in [19.05 mm]
Height	0.5 in [12.7 mm]

Package Type Connectorized Module

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz PE85N1022](#)



## 50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz

### Noise Generators Technical Data Sheet

PE85N1022

#### Connectors

DC Connector  
Output Connector

BNC Female  
SMA Male

#### Environmental Specifications

##### Temperature

Operating Range  
ESD Sensitivity

-20 to 75 deg C  
ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

Not RoHS Compliant  
REACH Compliant

01/01/1753

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz PE85N1022](#)





50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz

Noise Generators Technical Data Sheet

PE85N1022

Typical Performance Data

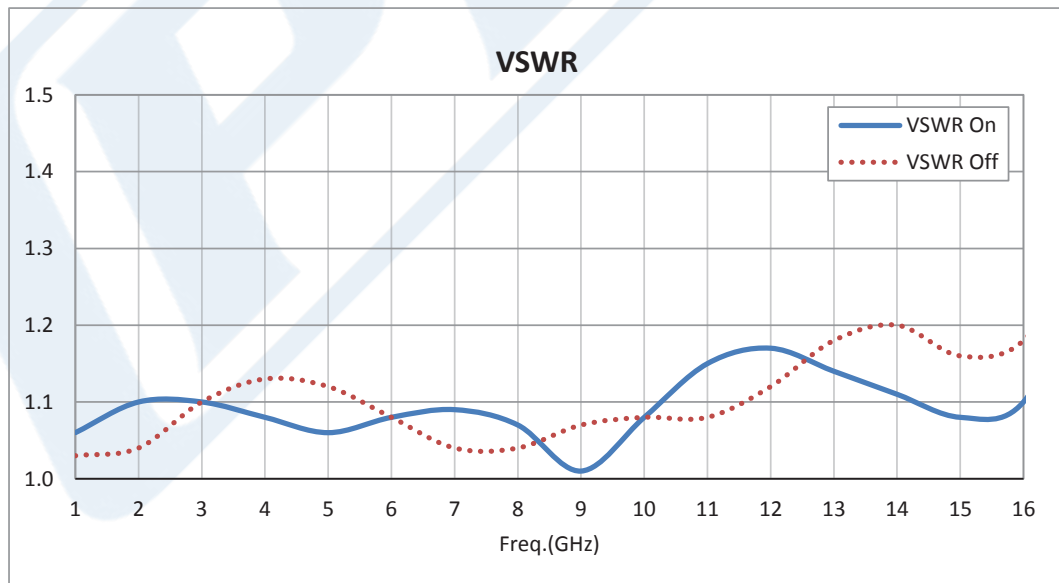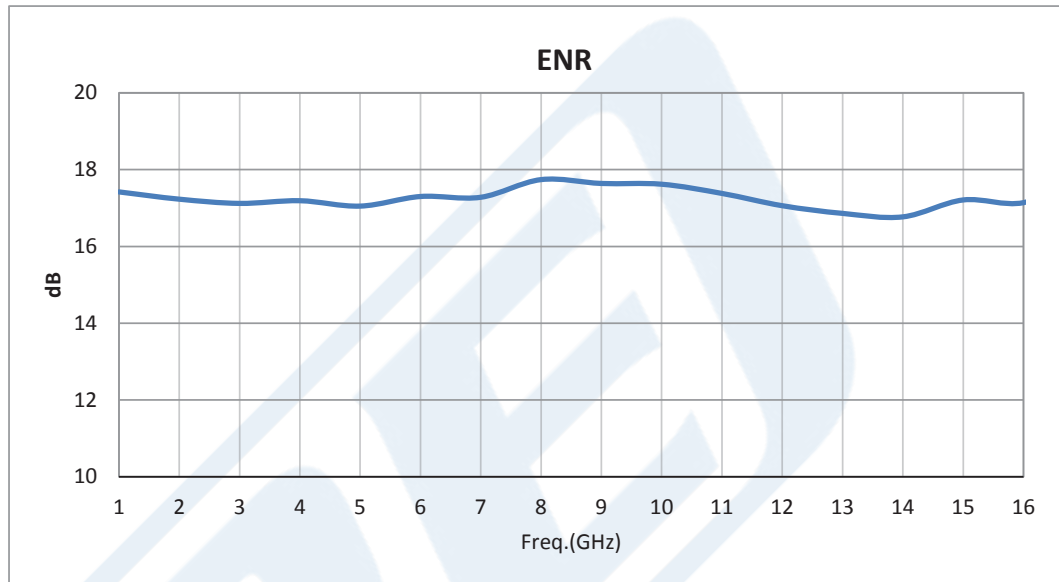

50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz PE85N1022](#)





## 50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz

### Noise Generators Technical Data Sheet

PE85N1022

maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz PE85N1022](http://www.pasternack.com/50-ohm-bnc-noise-source-output-15-db-1-18-ghz-pe85n1022-p.aspx)

URL: <http://www.pasternack.com/50-ohm-bnc-noise-source-output-15-db-1-18-ghz-pe85n1022-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE85N1022 CAD Drawing

50 Ohm BNC Medium Power Noise Source With A Noise Output ENR Of 15 dB From 1 GHz to 18 GHz

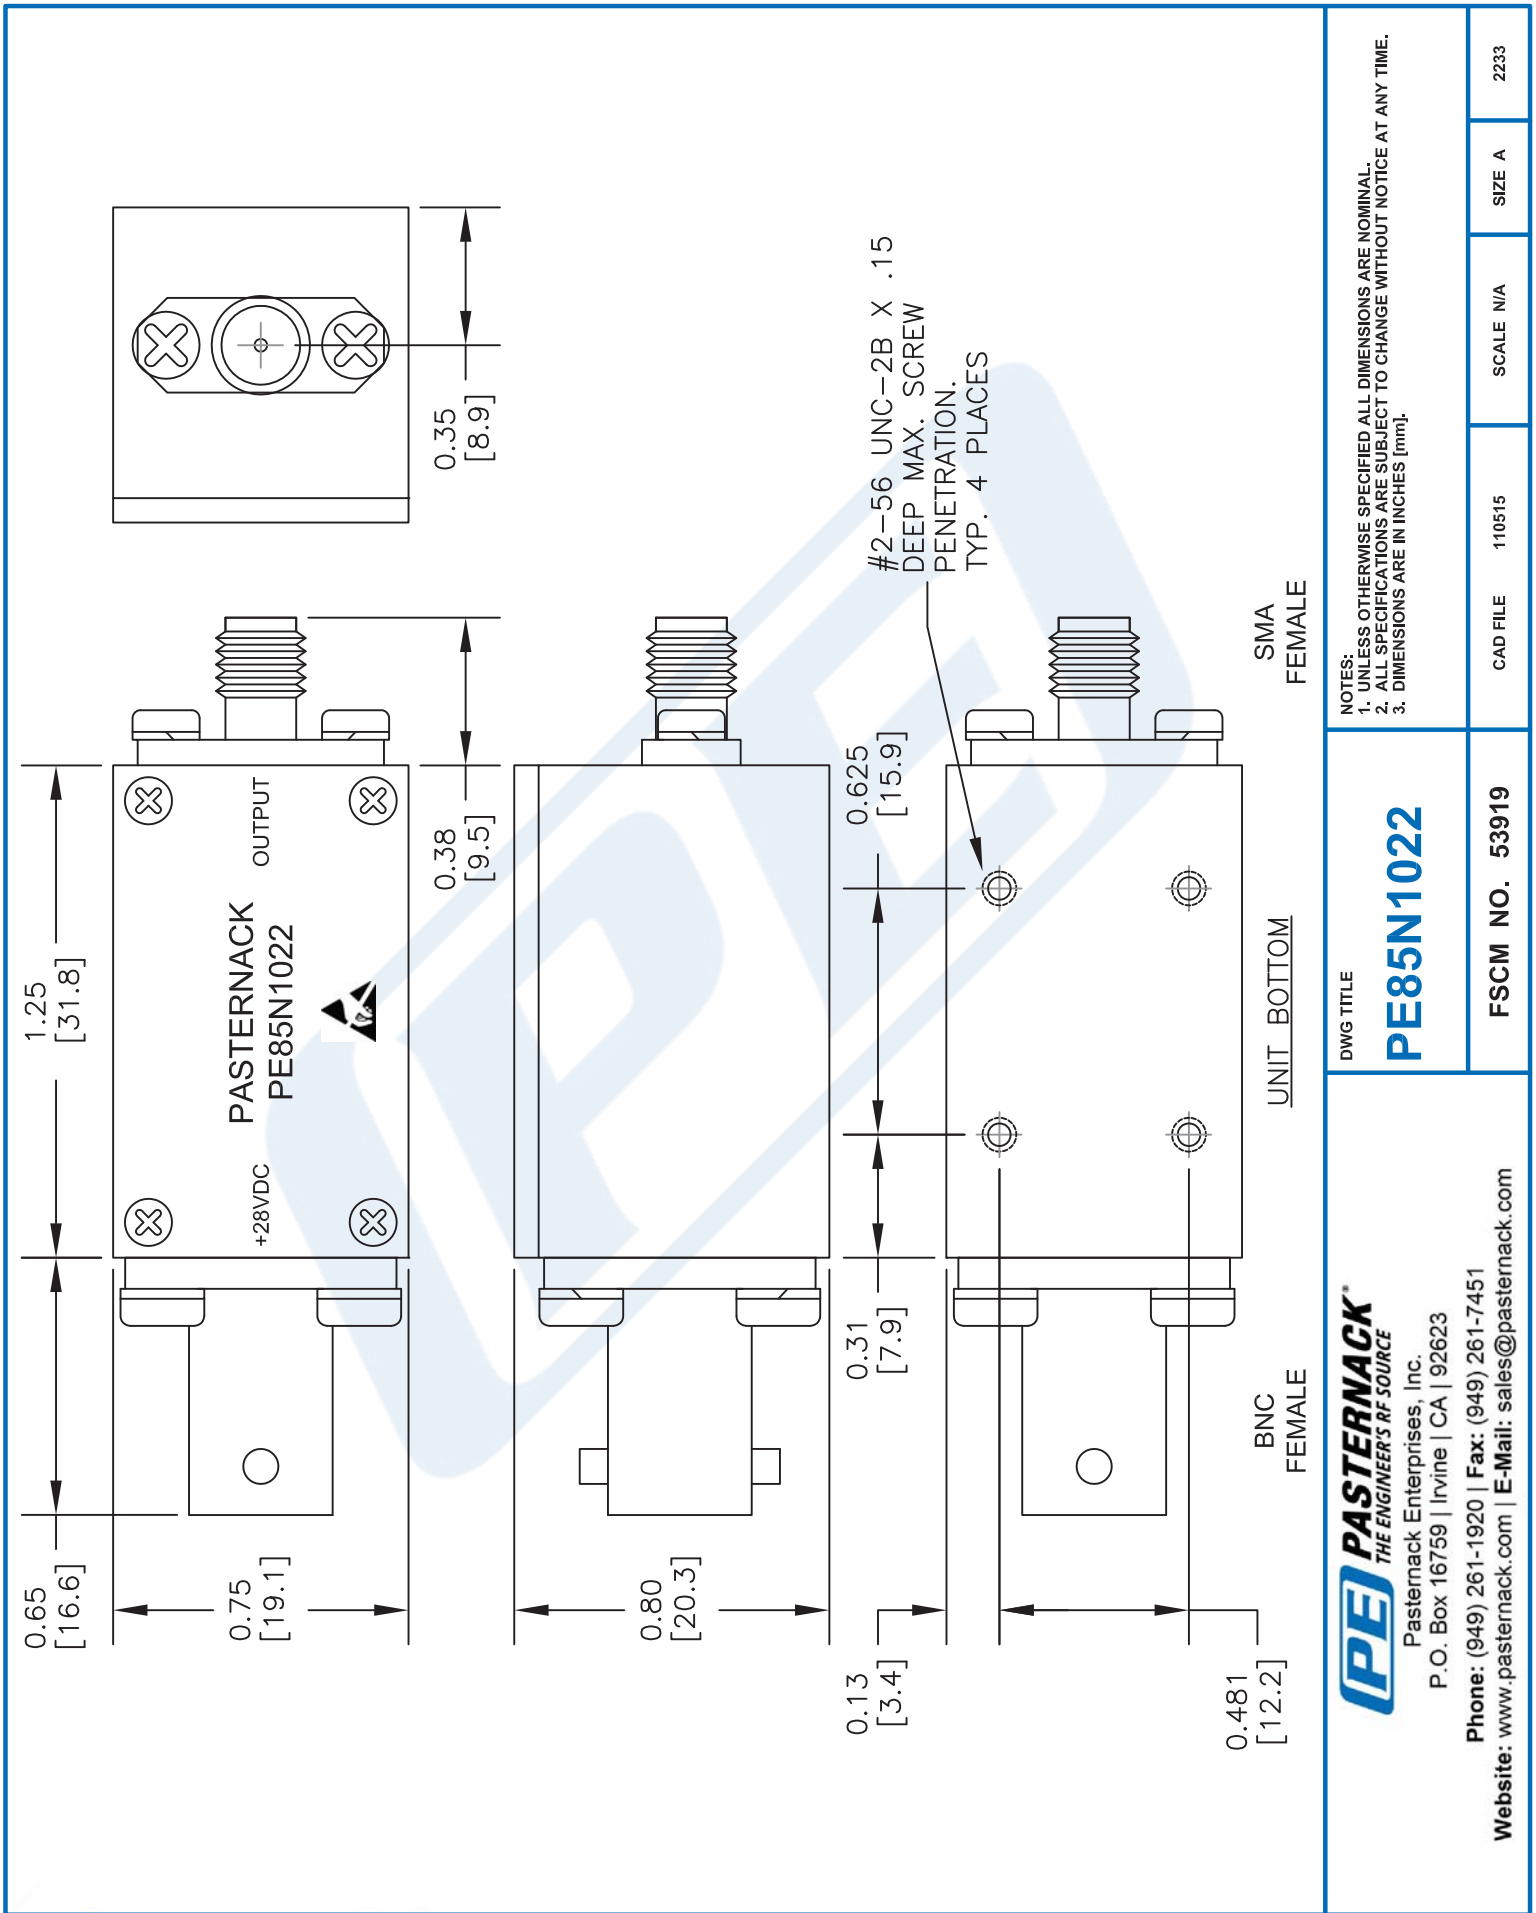

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE85N1022**

FSCM NO. 53919

CAD FILE 110515

SCALE N/A

SIZE A

2233

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com