


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

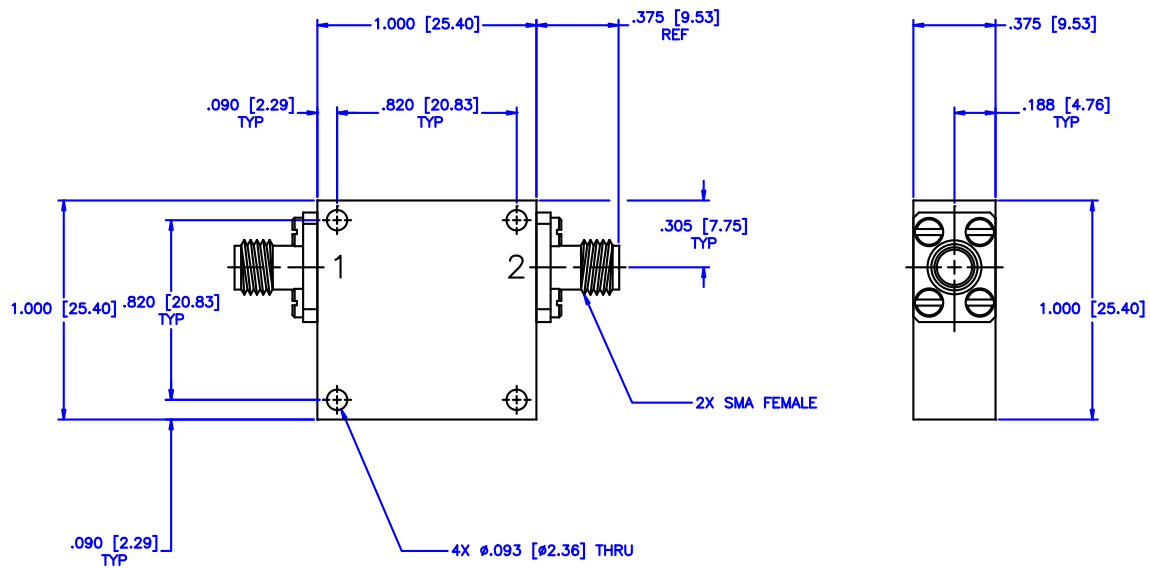

SPECIFICATIONS

Frequency Range: 0.82–0.86 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.3dB Max.
 VSWR: 1.22:1 Max.
 Power Avg, Peak: 25W, 250W
 Operating Temperature: -54°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A	
DRAWN:		DATE:		DRAWING TITLE:			
Pai boon Luekhamhan		08-25-2000		COAXIAL ISOLATOR			
APPROVED:		DATE:		PART NO.			
T. Nguyen		08-25-2000		IS-36			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:	DWG NO.
				OD2L5	N/A	N/A	82097
				DO NOT SCALE THE DRAWING			