



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW IF Filter 875 MHz (package 13.3mm x 6.5 mm)

TST Parts No.: TB0883A

Customer Parts No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Kazuma Lee

Approval by: _____ Francis Chen

Date: _____ 11 / 24 / 2010

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

IF SAW Filter 875MHz SMD 13.3X6.5mm

MODEL NO.: TB0883A

REV. NO.1

A. MAXIMUM RATING:

1. Operating temperature range: -40°C to 85°C
2. Storage temperature range: -40°C to 85°C
3. Input Power Level : 10 dBm
4. Maximum DC Voltage : 10V

RoHS Compliant
Lead free
Lead-free soldering

B. Characteristics :

1. Ambient Temperature: 25 °C

Characteristics	Value		
	Min.	Typ.	Max.
Center frequency F_C MHz	-	875	-
Maximum Insertion loss I.L. dB	-	23.5	25.5
1dB Band Width MHz	10.0	10.7	-
3dB Band Width MHz	-	11.3	-
40dB Band Width MHz	-	14.1	15.0
Passband Ripple at $F_C \pm 4.8$ MHz dB	-	0.8	1.2
Group Delay in $F_C \pm 4.8$ MHz nsec	-	60	110
Absolute group Delay usec	-	1.1	-
Attenuation (Reference level from minimum Insertion loss)			
$F_C \pm 7.5$ MHz dB	34	42	-
Single Input Impedance Ohm	-	50	-
Single Output Impedance Ohm	-	50	-
Temperature Coefficient ppm/°C ²	-	-0.036	-

C. Frequency Responses:

1. Wide band response

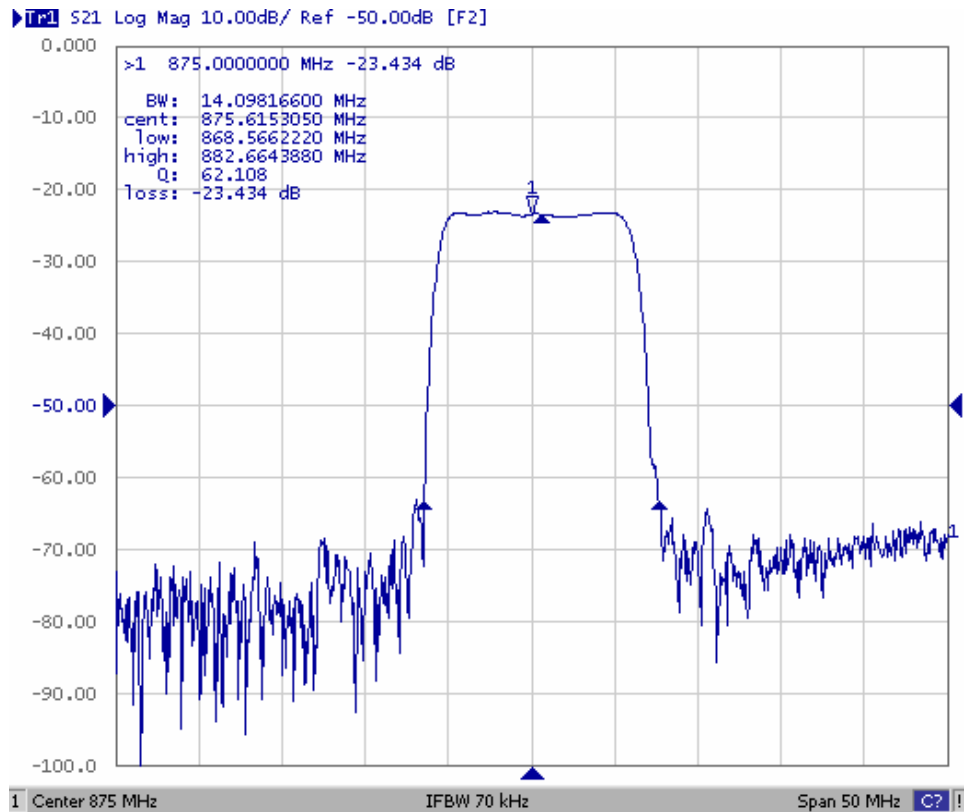


Fig1. Horizontal: 5MHz/Div Vertical: 10dB/Div

2. Pass band & Group Delay response


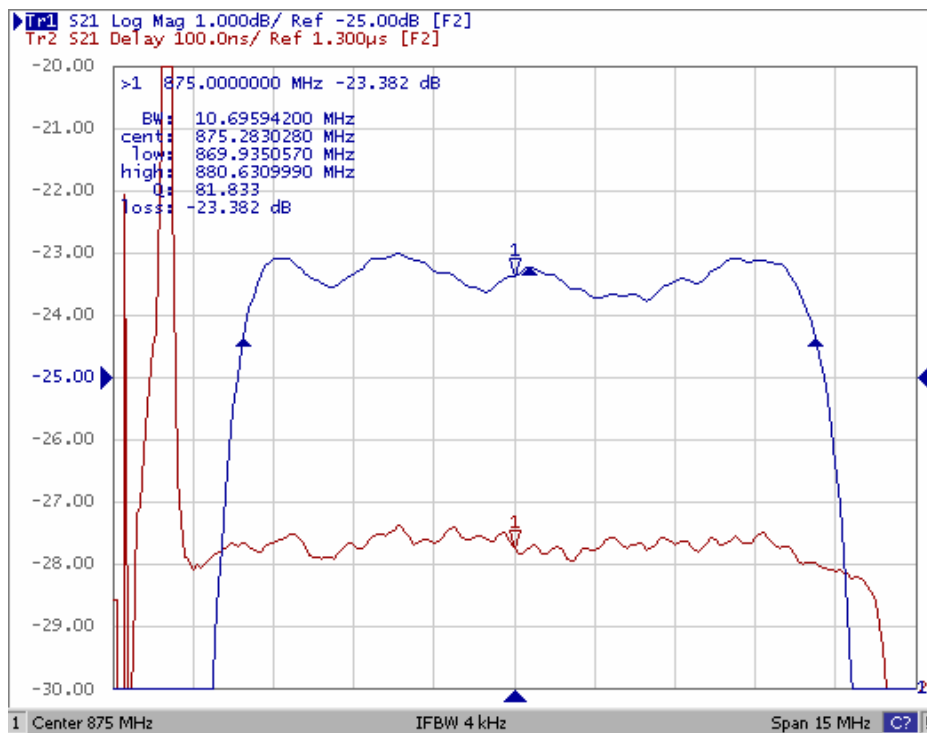


Fig2. Horizontal: 1.5MHz/Div Vertical: 1dB/Div
Vertical: 100ns/Div

D. Outline Drawing:

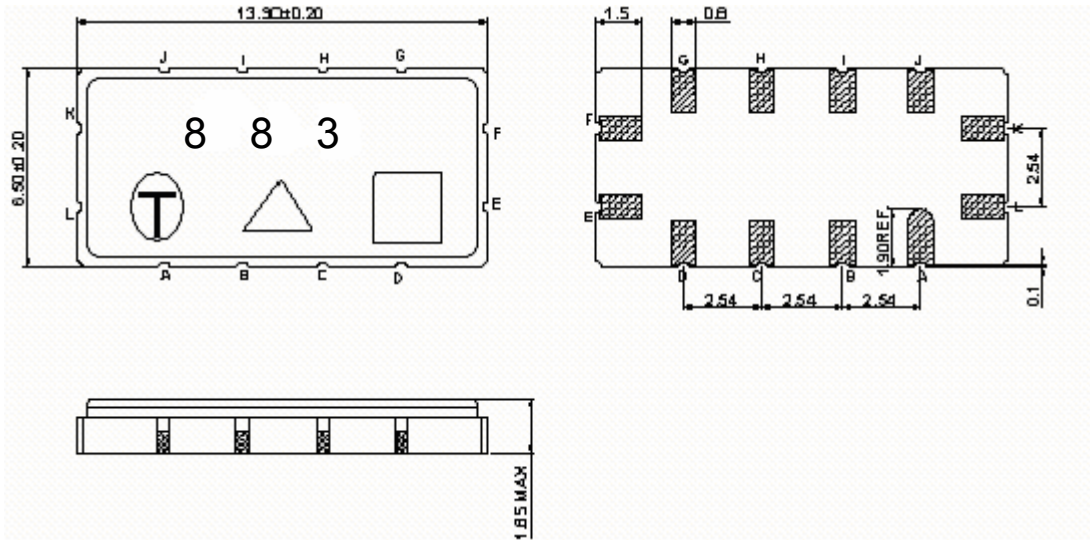

#K : Input

#L : Input Ground

#E : Output

#F : Output Ground

#A,B,C,D,G,H,I,J : Ground


□ : Week Code (Follow the table from planner each year)

Unit: mm

△ : Product / Year Code


Year	2009 2013	2010 2014	2011 2015	2012 2016
Product Code	B	b	<u>B</u>	<u>b</u>

E. Measurement Circuit: Matching Circuit:

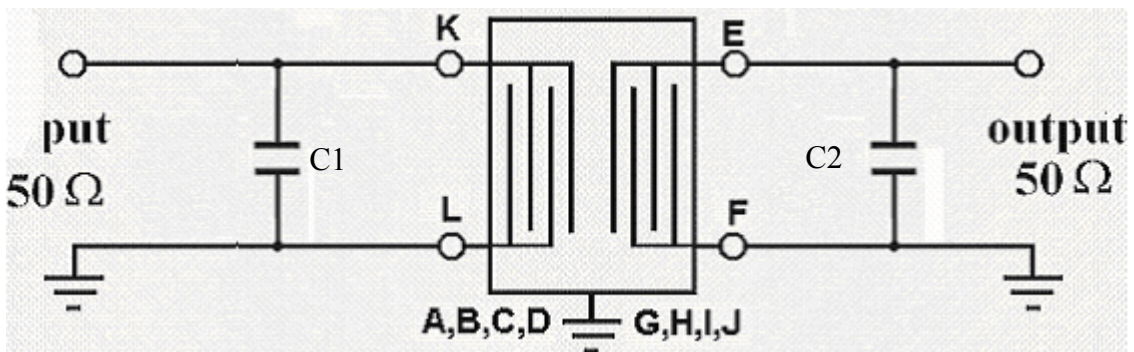



$C1 = 3.3\text{pF}$ $C2 = 6.8\text{pF}$

F. PCB Footprint

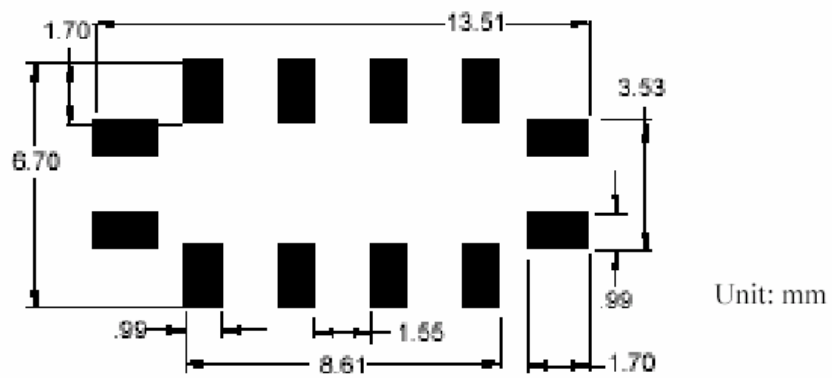


G. PACKING:

1. REEL DIMENSION

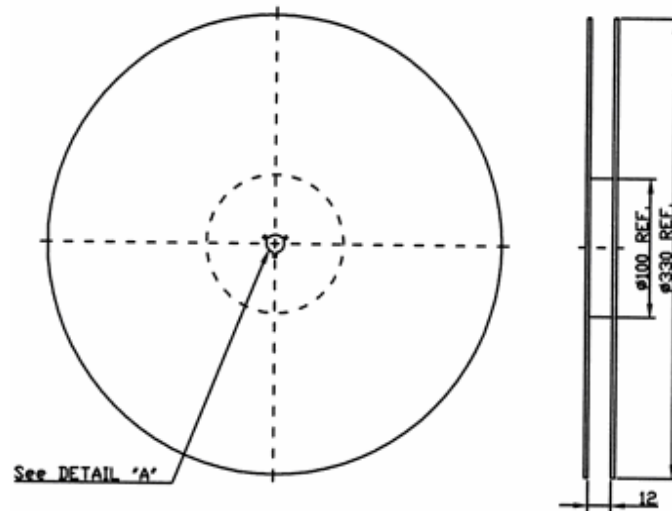

2. TAPE DIMENSION

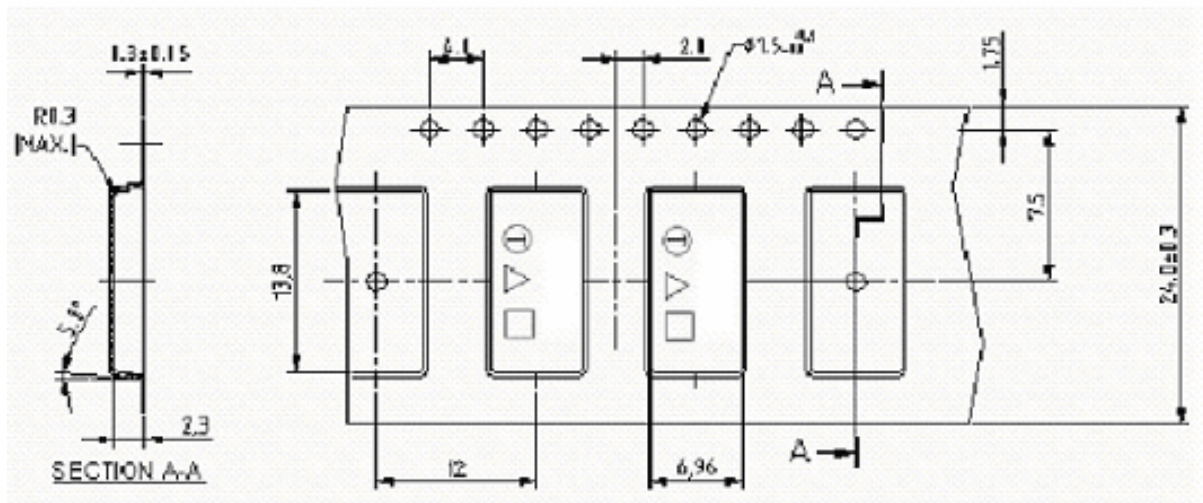

H. RECOMMENDED REFLOW PROFILE :

