

# 5KCB20-310/U180 *KEL-com*<sup>TM</sup> filter

## ◆ Features:

- Designed for Low Cost Applications
- Low Profile Package
- Amplitude Matched Pairs to 0.25 dB across UHF Military Frequency Band




## ◆ Specifications:


Center Frequency:	310 MHz	Rejection: 750 to 1500 MHz:	20 dB min.
Insertion Loss @ $f_0$ :	1.0 dB max.	Operating Temperature:	-40°C to +85° C
1.0 dB bandwidth:	180 MHz	Dimensions:	1.0" x 0.5" x 0.3"
Passband Return Loss:	18 dB min.	Amplitude Matched Pair 225 to 400 MHz	0.25 dB min.
Rejection: DC to 190 MHz:	20 dB min.		

## ◆ Applications:

- Airborne
- Ground Based
- Naval Transceivers

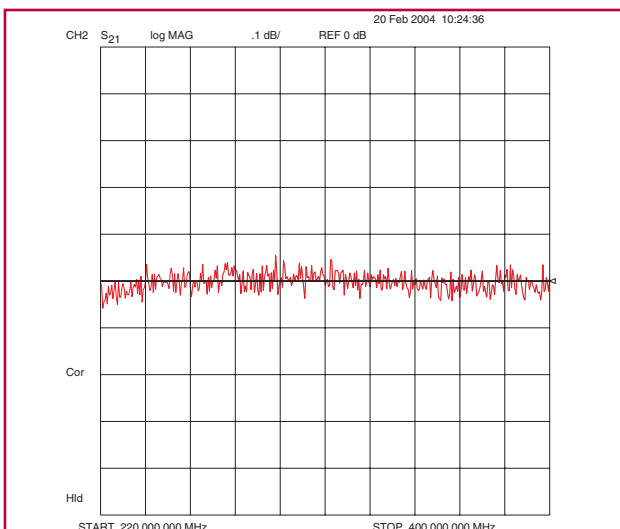

**Amplitude**

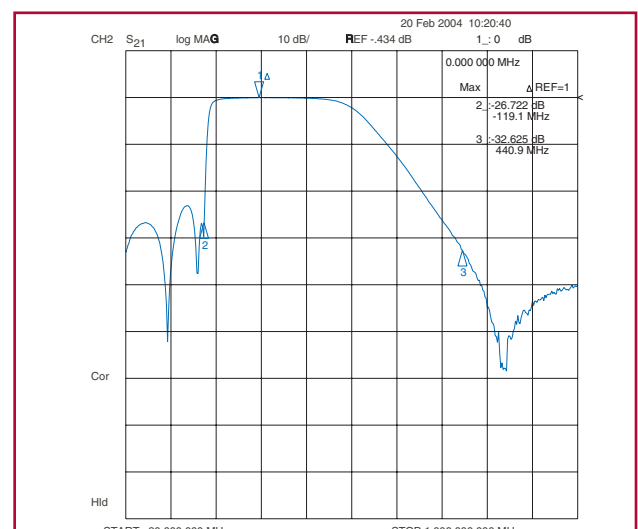

**Rejection**

Filtering Solutions for Your Global Market

### USA

Phone: 410-749-2424  
FAX: 410-749-5725  
Email: sales@klmicrowave.com


### EUROPE

Phone: +44-(0)-1908-547920  
FAX: +44-(0)-1908-695284  
Email: sales@kleurope.com

Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)



# 5KCB20-310/U180 *KE*L-com™ filter

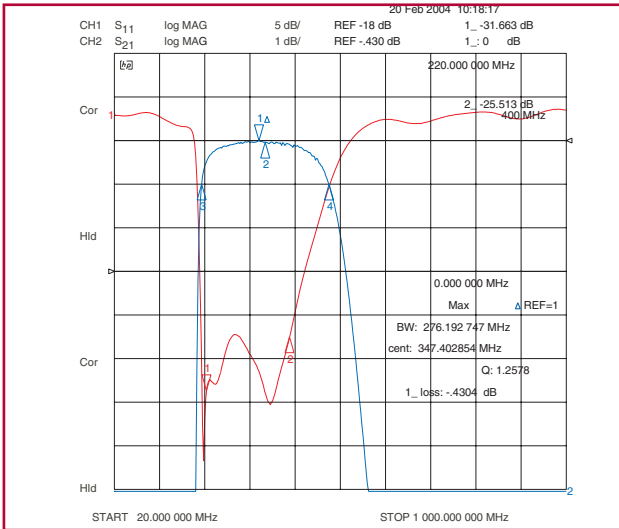

**VSWR**

**Filtering Solutions for Your Global Market**

**USA**

Phone: 410-749-2424  
FAX: 410-749-5725  
Email: sales@klmicrowave.com

**EUROPE**

Phone: +44-(0)-1908-547920  
FAX: +44-(0)-1908-695284  
Email: sales@kleurope.com

**Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)**

