
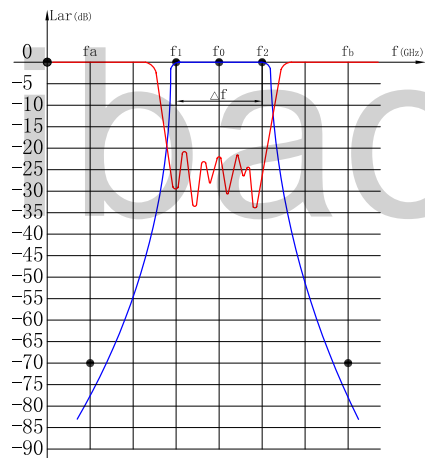


4. 波导带通滤波器 --- 阻带衰减 70dB (Band Pass Filter - Attenuation 70dB)

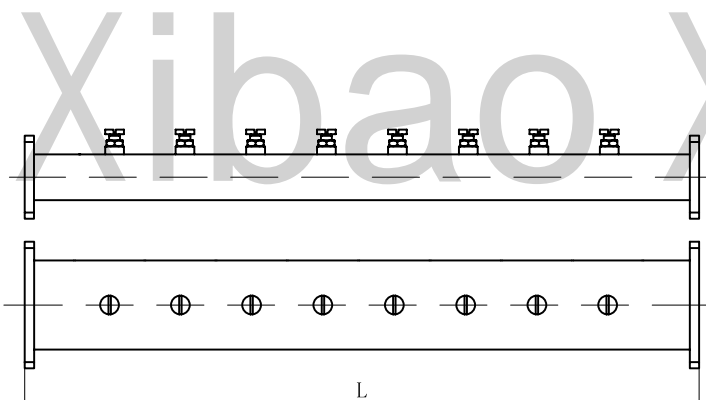

XB-BPF-70dB带通滤波器特性曲线图

型号 Model	工作范围频率 Frequency (GHz)	带宽 Bandwidth(%)	插损 IL (dB)	通带 VSWR	阻带衰减 Attenuation (\geq dB)	连接法兰 Flange	外形尺寸 Length (mm)
XB-WBPF650-70	1.14 ~ 1.79	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	1250
XB-WBPF510-70	1.45 ~ 2.20	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	1000
XB-WBPF430-70	1.72 ~ 2.61	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	900
XB-WBPF340-70	2.17 ~ 3.30	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	730
XB-WBPF284-70	2.60 ~ 3.95	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	580
XB-WBPF229-70	3.22 ~ 4.90	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	500
XB-WBPF187-70	3.94 ~ 5.99	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	400
XB-WBPF159-70	4.64 ~ 7.05	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	330
XB-WBPF137-70	5.38 ~ 8.17	1 ~ 10	≤ 0.3	≤ 1.3	70	FDP/FDM	270
XB-WBPF112-70	6.57 ~ 9.99	1 ~ 10	≤ 0.3	≤ 1.3	70	FBP/FBM/FBE	240
XB-WBPF90-70	8.20 ~ 12.5	1 ~ 10	≤ 0.35	≤ 1.3	70	FBP/FBM/FBE	210
XB-WBPF75-70	9.84 ~ 15.0	1 ~ 10	≤ 0.35	≤ 1.3	70	FBP/FBM/FBE	170
XB-WBPF62-70	11.9 ~ 18.0	1 ~ 10	≤ 0.4	≤ 1.3	70	FBP/FBM/FBE	150
XB-WBPF51-70	14.5 ~ 22.0	1 ~ 10	≤ 0.4	≤ 1.3	70	FBP/FBM/FBE	120
XB-WBPF42-70	18.0 ~ 26.5	1 ~ 10	≤ 0.6	≤ 1.3	70	FBP/FBM/FBE	95
XB-WBPF34-70	21.7 ~ 33.0	1 ~ 10	≤ 0.6	≤ 1.3	70	FBP/FBM/FBE	85
XB-WBPF28-70	26.5 ~ 40.0	1 ~ 10	≤ 0.6	≤ 1.3	70	FBP/FBM/FBE	75
XB-WBPF22-70	33.0 ~ 50.0	1 ~ 10	≤ 0.6	≤ 1.3	70	UG383/U	65
XB-WBPF19-70	39.2 ~ 59.6	1 ~ 10	≤ 0.6	≤ 1.3	70	UG383/U-Mod	60