



RF-LAMBDA

The power beyond expectations

RKT2G4A80A

ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-04GHZ 80DB RANGE)

Product description


- Very small package and broadband performance
- Adjustable during operation
- Excellent Repeatability low deviation
- Low Deviation from Nominal Value
- 50Ω impedance
- Higher power is available upon request
- Custom Configurations Available Upon Request.
- 2W CW average power
- Custom Configurations Available Upon Request.



Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G4A80A	DC-4	2	70 typ 80 max.	1.0	1.5	<2.5	+/-0.5dB

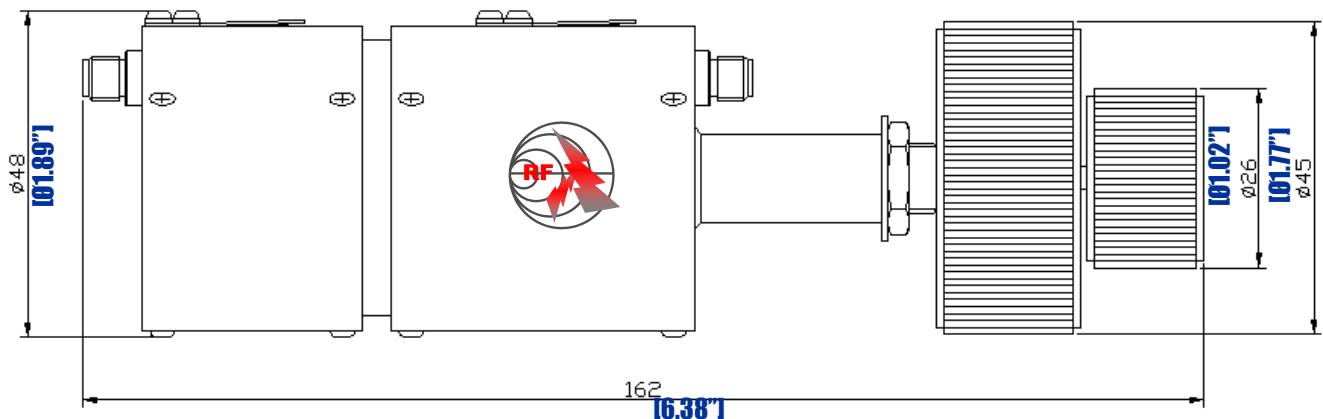

PN: RKT 2 G X A 80

Manual Control Attenuator Power Handle In Watt Freq Unit GHz Freq Number Product Type Attenuation Range

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

MANUAL CONTROL ROTARY ATTENUATOR (DC-04GHZ 80DB RANGE)