

9CSP50-00003 Helical Resonator Filter

◆ Features:

- High Selectivity
- Greater than 90 dB Ultimate Rejection
- Low Passband Insertion Loss
- Excellent Return Loss




◆ Specifications:


Center Frequency:	257 MHz	Rejection:	80 dB @ 210 - 229 MHz & 285 - 400 MHz
Passband:	244 to 270 MHz	Dimensions:	8.5" x 1.5" x 2.0"
Passband Insertion Loss:	2.0 dB (< 1.0 dB @ f_0)		

◆ Applications:

- Satellite Communications Systems
- Airborne
- Fixed Position & Mobile Ground Based
- Naval
- Commercial Communications Systems
- Police
- Fire
- Homeland Security

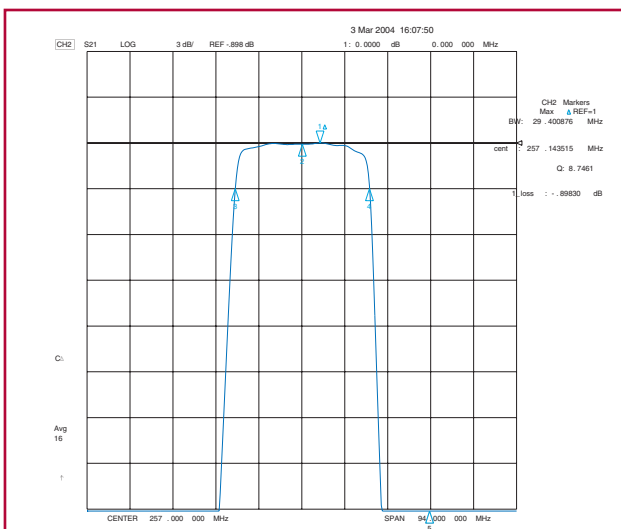

3 dB BW

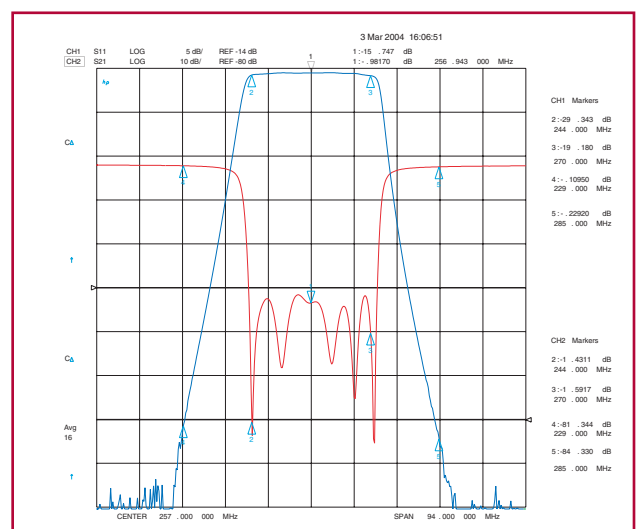

Passband & Return Loss

Filtering Solutions for Your Global Market


USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com



9CSP50-00003 Helical Resonator Filter

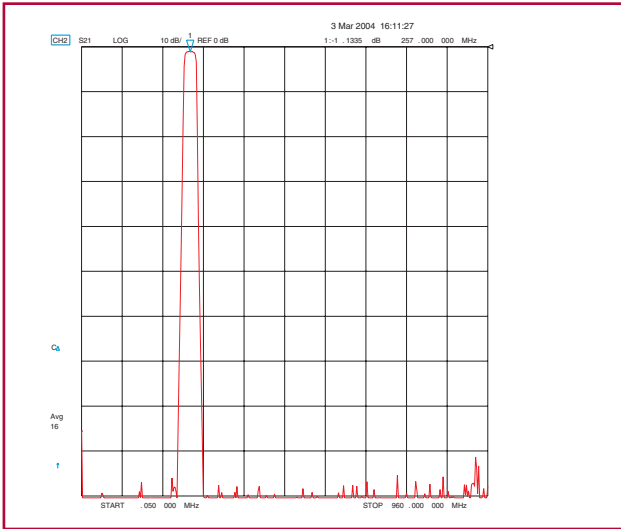

Rejection

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

