



WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W42CA002

Features

- K Band, 18 to 26.5 GHz Frequency Range
- WR-42 Waveguide Interface with UG-595/U Flange
- 2.92mm Male RF Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

PE-W42CA002 is a waveguide to coaxial adapter operating in the K Band with a 18 to 26.5 GHz frequency range. This adapter offers a WR-42 waveguide interface size coupled with a UG-595/U flange. PE-W42CA002 is constructed of aluminum and plated in gold to ensure durability and repeatable RF performance. The versatile 2.92mm Male connector offered by this adapter is mechanically compatible with commercially available SMA and 3.5 mm connectors.

Configuration

Waveguide Size	WR-42
Flange	UG595/U
RF Connector	2.92mm Male
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26.5	GHz
VSWR			1.29:1	
Insertion Loss			0.3	dB

Mechanical Specifications

Size	
Length	0.85 in [21.59 mm]
Width	0.88 in [22.35 mm]
Height	0.88 in [22.35 mm]

RF Connector	
Connector Type	2.92mm Male
Body Material and Plating	Stainless Steel

Waveguide Interface	
Waveguide Type	WR-42
Flange Type	UG595/U
Body Material and Plating	Aluminum, Gold
Plating Specification	ASTMB488

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band PE-W42CA002](#)





WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W42CA002

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant


06/14/2014

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

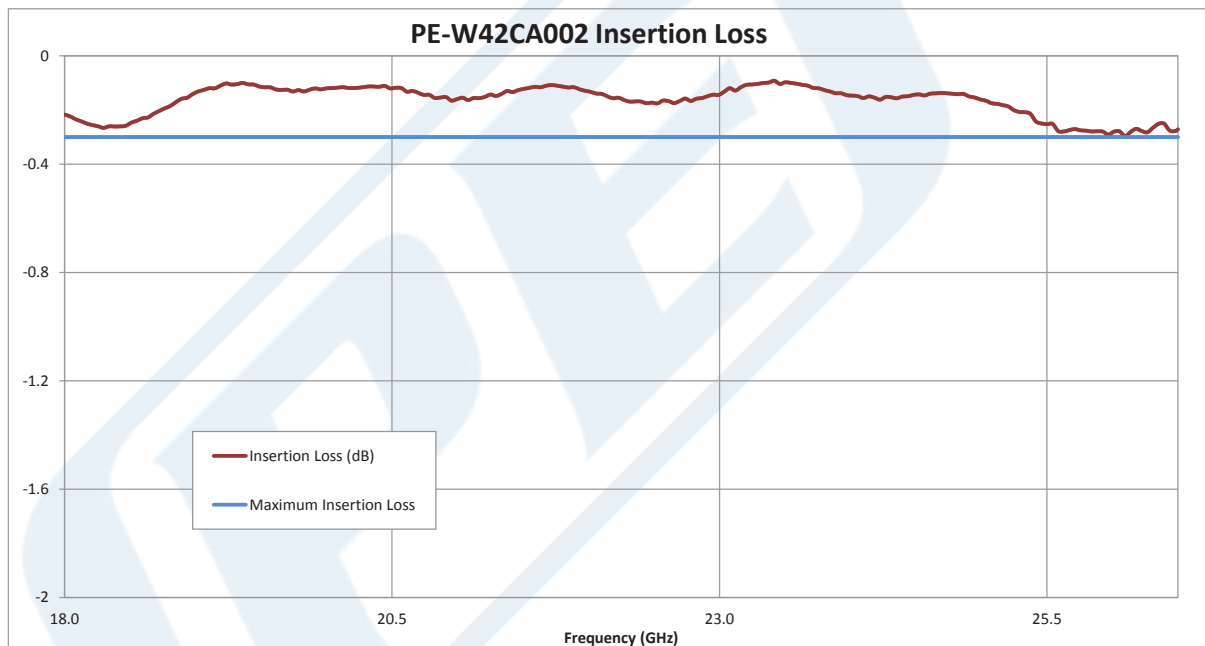


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band PE-W42CA002](#)



WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W42CA002

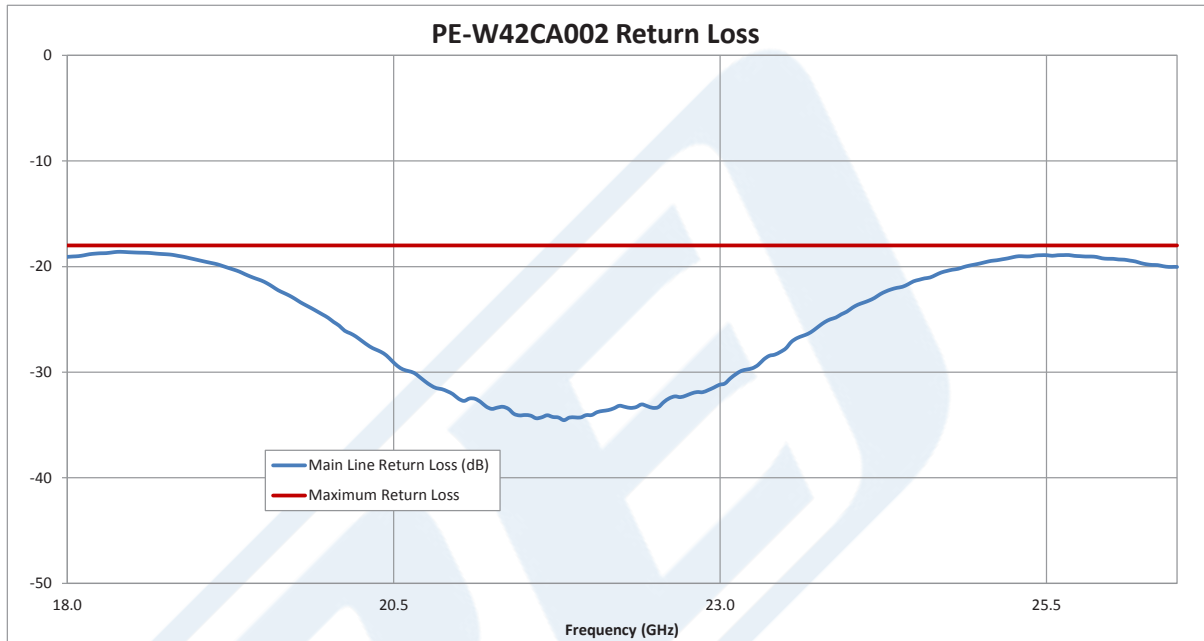

WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band PE-W42CA002](http://www.pasternack.com/wr-42-ug595-2.92mm-waveguide-coax-adapter-26.5-ghz-pe-w42ca002-p.aspx)


URL: <http://www.pasternack.com/wr-42-ug595-2.92mm-waveguide-coax-adapter-26.5-ghz-pe-w42ca002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE-W42CA002 CAD Drawing

WR-42 With UG595/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 18 GHz to 26.5 GHz K Band

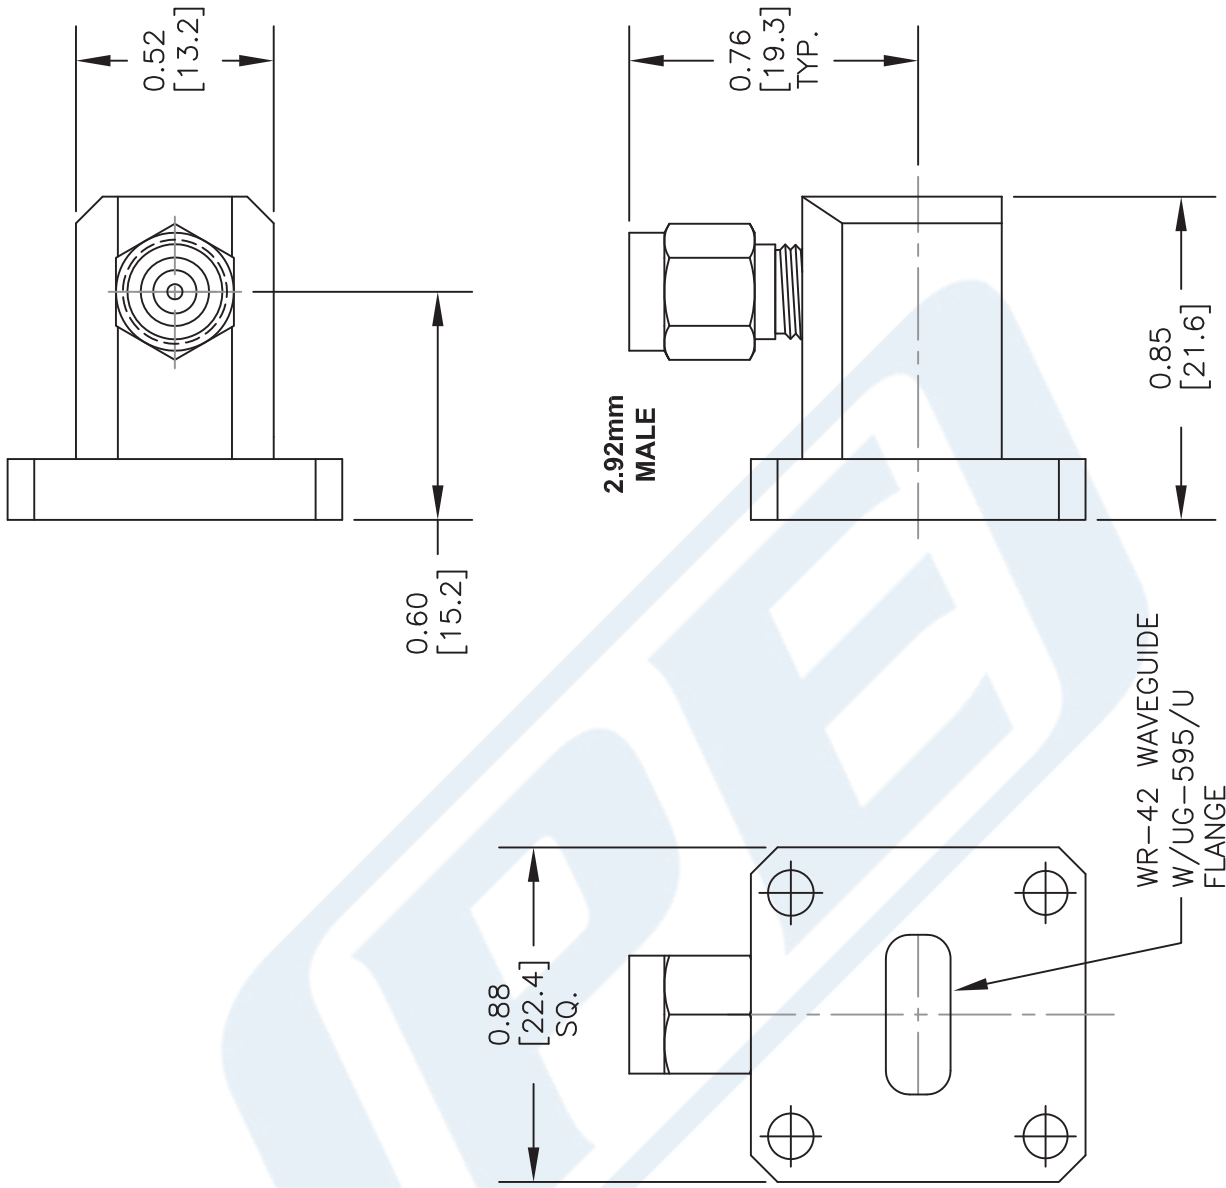

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
DECIMALS	ANGLES	FRACTIONS
.XX ±.01	± 1/2°	± 1/64
.XXX ±.005		
HOLE DIAMETER	TOLERANCE	
.0135 TO .125	+.004/- .001	
.126 TO .250	+.005/- .001	
.251 TO .500	+.006/- .001	
.501 TO .750	+.008/- .001	
.751 TO 1.000	+.010/- .001	
1.001 TO 2.000	+.012/- .001	

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

DWG TITLE
PE-W42CA002

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 031215

SCALE N/A

SIZE A

2233

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com