

HCMOS 3.2x2.5mm 1.0 V SMD Oscillator **FOX**

Model: F300 SERIES

RoHS Compliant / Pb Free

Rev. 12/12/2008

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



PART NUMBER SELECTION Learn More - Internet Required				
Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
824-Frequency-xxxxx	F300	±100PPM	-10 ~ +70	1.800 ~ 50.000
824A-Frequency-xxxxx	F300R	±100PPM	-40 ~ +85	1.800 ~ 50.000
824B-Frequency-xxxxx	F305	±50PPM	-10 ~ +70	1.800 ~ 50.000
824C-Frequency-xxxxx	F305R	±50PPM	-40 ~ +85	1.800 ~ 50.000
824D-Frequency-xxxxx	F306	±25PPM	-10 ~ +70	1.800 ~ 50.000
824E-Frequency-xxxxx	F306R	±25PPM*	-40 ~ +85	1.800 ~ 50.000
824F-Frequency-xxxxx	F308	±20PPm*	-10 ~ +70	1.800 ~ 50.000

ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (TSTG)	-55°C ~ +125°C
Supply Voltage (VDD)	1.0V ± 5%
Input Current (IDD)	
1.800 ~ 32.100 MHz	2.5mA
32.100+ ~ 50.000 MHz	3.5mA
Output Symmetry (50% VDD)	40% ~ 60%
Rise Time (20% ~ 80% VDD)	
1.800 ~ 32.100 MHz	5nS
32.100+ ~ 50.000 MHz	3.5nS
Fall Time (80% ~ 20% VDD)	
1.800 ~ 32.100 MHz	5.0nS
32.100+ ~ 50.000 MHz	3.5nS
Output Voltage (VOL)	20% VDD
(VOH)	80% VDD Min
Output Current (IOL)	2mA Min
(IOH)	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	5µA
Start-up Time (Ts)	5mS
Output Disable Time ²	300nS
Output Enable Time ²	5mS
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au


¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, and vibration. *Excludes shock and vibration.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Notes:

*A 0.01µF capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

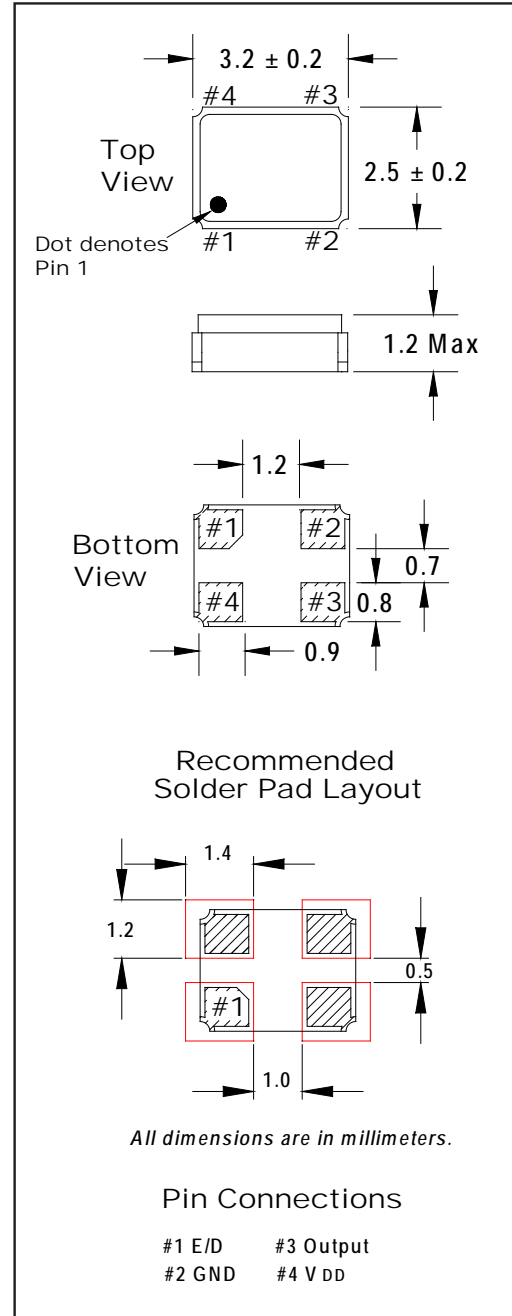

ENABLE / DISABLE FUNCTION	
Pin 1	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level VIH ≥ 70% VDD	ACTIVE
'0' Level VIL ≤ 30% VDD	High Z

HCMOS 3.2x2.5mm 1.0 V SMD Oscillator



Model: F300 SERIES

RoHS Compliant / Pb Free

Rev. 12/12/2008

Page 2 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F300 Series	Ø1.5	4.0	4.0	3.5	8.0	1.4	2,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F300 Series	2.0	Ø13	Ø21	Ø60	Ø180	9.0	1.2

