

# TNC-M RA RG55 RG142 RG223 400

SC4264





## SPECIFICATIONS

**ELECTRICAL**  
 FREQUENCY: 0-11 GHZ  
 IMPEDANCE: 50 OHMS

**MECHANICAL**  
 MATERIAL BODY: NICKLE PLATED BRASS  
 MATERIAL CONTACT: BRASS  
 CONTACT PLATING: Au PER MIL-G-45204  
 INSULATOR: TEFLON  
 INTERFACE: MIL-STD-348B  
 TEMPERATURE: -55° TO +155°C

ROHS COMPLIANT

**ASSEMBLY PROCEDURE:**  
 TRIM CABLE AS SHOWN  
 SLIDE SLEEVE ONTO CABLE  
 SOLDER CONTACT ONTO CENTER CONDUCTOR  
 PUSH CABLE IN UNTIL DIELECTRIC BOTTOMS IN CONNECTOR  
 TRIM EXCESS BRAID WIRES EVEN WITH SHOULDER OF BODY  
 SLIDE CRIMP SLEVE FORWARD UNTIL FLUSH W BODY  
 CRIMP

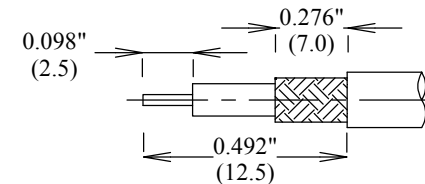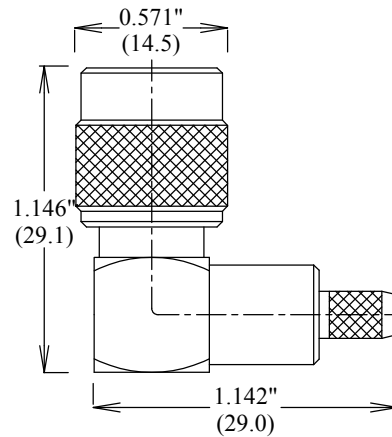

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**TNC-M RA RG55 RG142 RG223 400**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>SC4264</b>	<b>B</b>

ALL DIMENSIONS IN inches(MM) Typical

SCALE	SHEET
-------	-------