


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

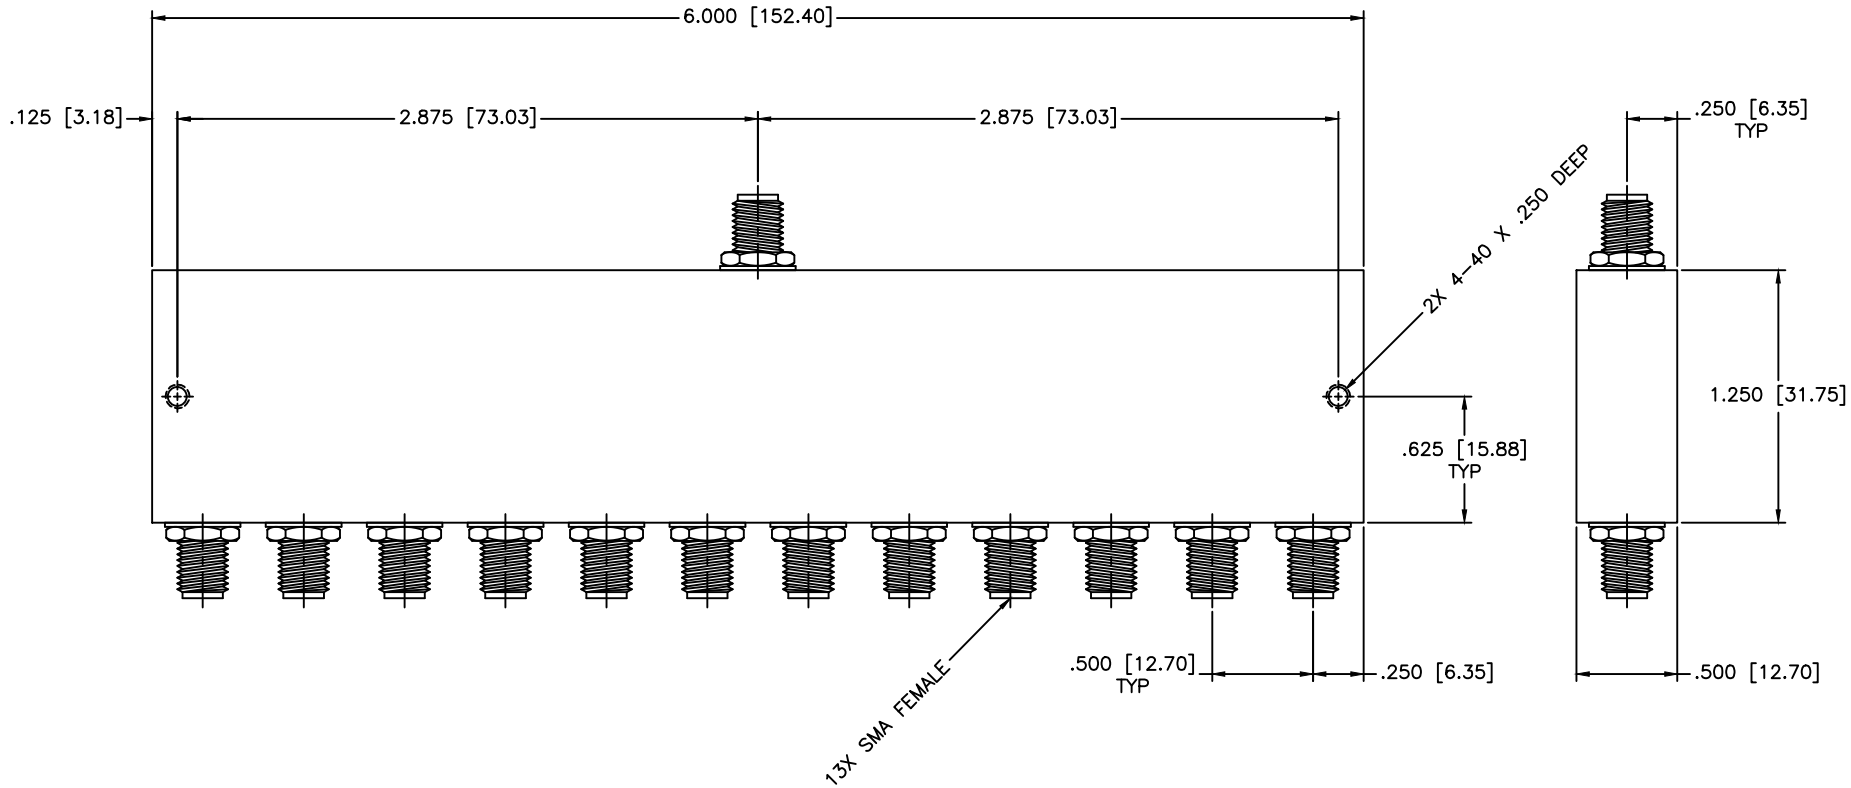

SPECIFICATIONS

Frequency Range: 10–500 MHz
 Insertion Loss: 1.6dB Max.
 Isolation: 20dB Min.
 Amplitude Balance: ± 0.3 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: ± 4 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 12-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL12-2		
DATE: 11-16-1997		CAGE CODE:		
APPROVED: T. Nguyen		DATE: 11-16-1997		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5		
		SIZE: N/A		
		REV: N/A		
		DWG NO. 82576		
		DO NOT SCALE THE DRAWING		