




120-1000MHz Highpass Filter

Part Number: AE120H9848

Passband:	120-1000MHz
3dB Cutoff frequency:	120MHz
Rejection:	>20dB @ Min 88-110MHz
Connectors:	SMA(F)
Package size:	1.25 X 0.5 X 0.4 inches

Outline Drawing:

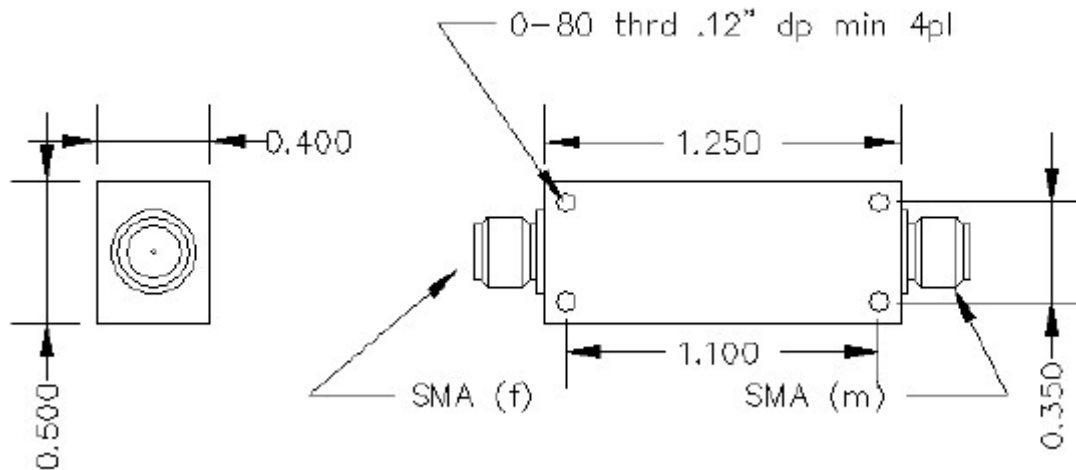



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products




120-1000MHz Highpass Filter

Part Number: AE120H9848

A157.lad

NOV 3, 2010

Attenuation/Return Loss

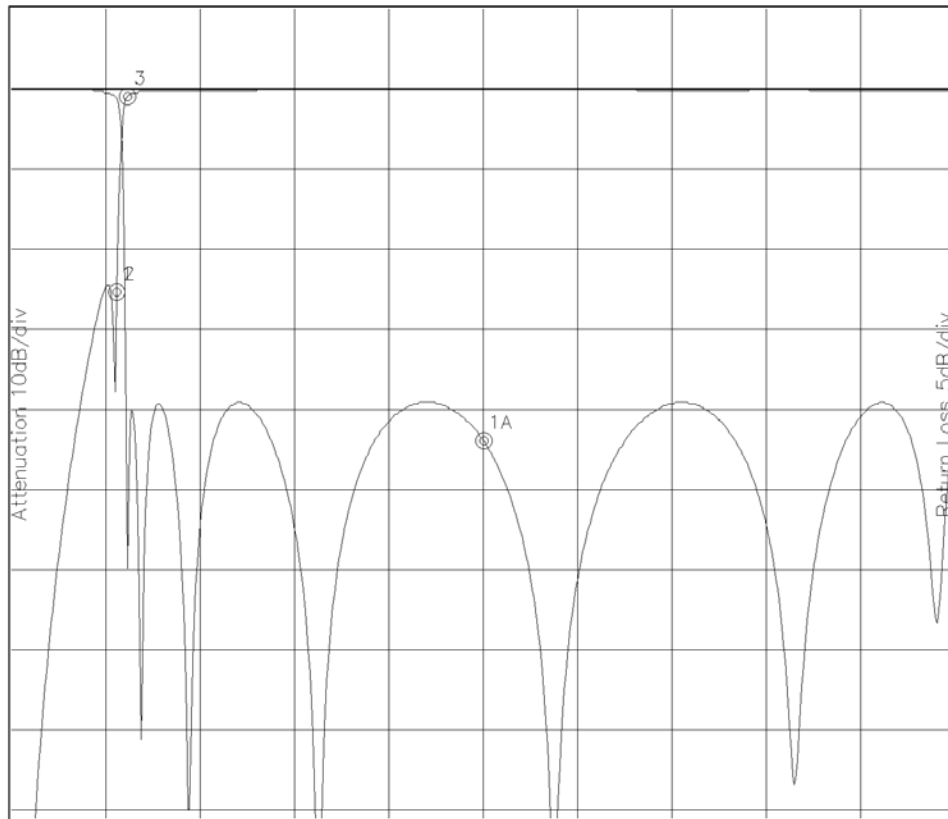

Attenuation Start: 0.10Hz Stop: 1000.0MHz

Return Loss Start: 0.10Hz Stop: 1000.0MHz

Marker 1 Freq 109.85MHz Atten -25.167dB

Marker 1A Freq 499.19MHz Ret Loss -21.868dB

Marker 2 Freq 109.85MHz Atten -25.167dB

Marker 3 Freq 121.16MHz Atten -0.773dB