


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	2D	.56(14.3) DIMENSION WAS .88(22.4)	12-29-08	GVC	---
	2D	.28(7.1) DIMENSION WAS .47(11.9)			
B	4C	REVISED MOUNTING HOLE PATTERN	1-8-07	GVC	---
	3/4B	REVISED CONNECTOR LOCATIONS			

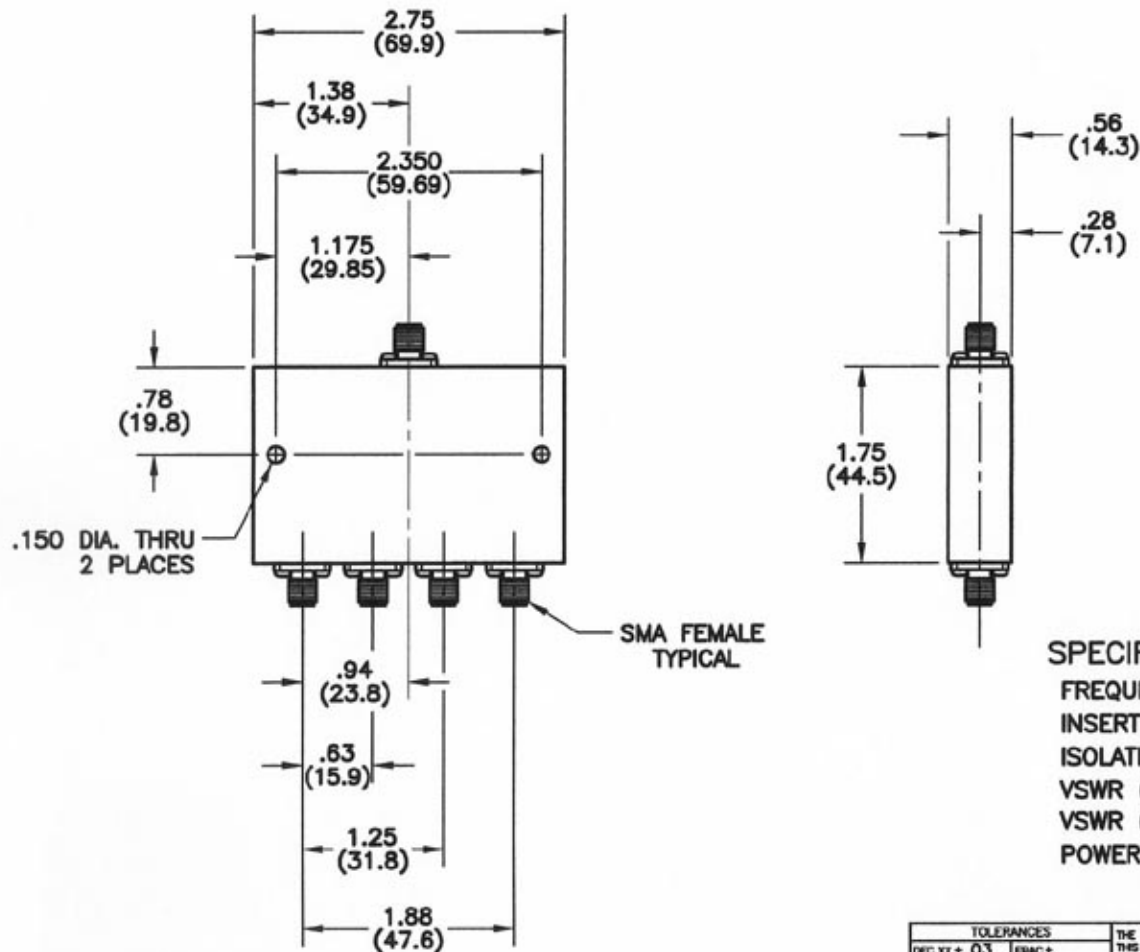

SPECIFICATIONS:

FREQUENCY RANGE: 0.8 - 2.5 GHz

INSERTION LOSS: 0.3 dB TYP., 0.5 dB MAX.

ISOLATION: 20 dB MIN; 23 dB TYP.

VSWR (COMMON PORT): 1.20:1 TYP.; 1.35: MAX

VSWR (OUTPUT PORTS): 1.20:1 TYP.; 1.35: MAX

POWER RATING: 30 WATTS AVG., WITH LOAD VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	MICROWAVE DEVICES <small>RF and Microwave Components</small>	
DEC.XX ± .03	FRACTION ±			
.XXX ± .010	ANG ±	SIGNATURES DATE		
MATERIAL				
FINISH	DR G.V.Cothren	11-10-08	OUTLINE, 4PD1.65S 4 WAY POWER DIVIDER	
APPD	CHK			
APPD	APPD			
APPD	APPD			
CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 738-8633		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.		CAGE SIZE DRAWING NO. 60674 B 900360-1
DRAWING SCALE 1=1				SHEET 1 OF 1

4

3

2

1