


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

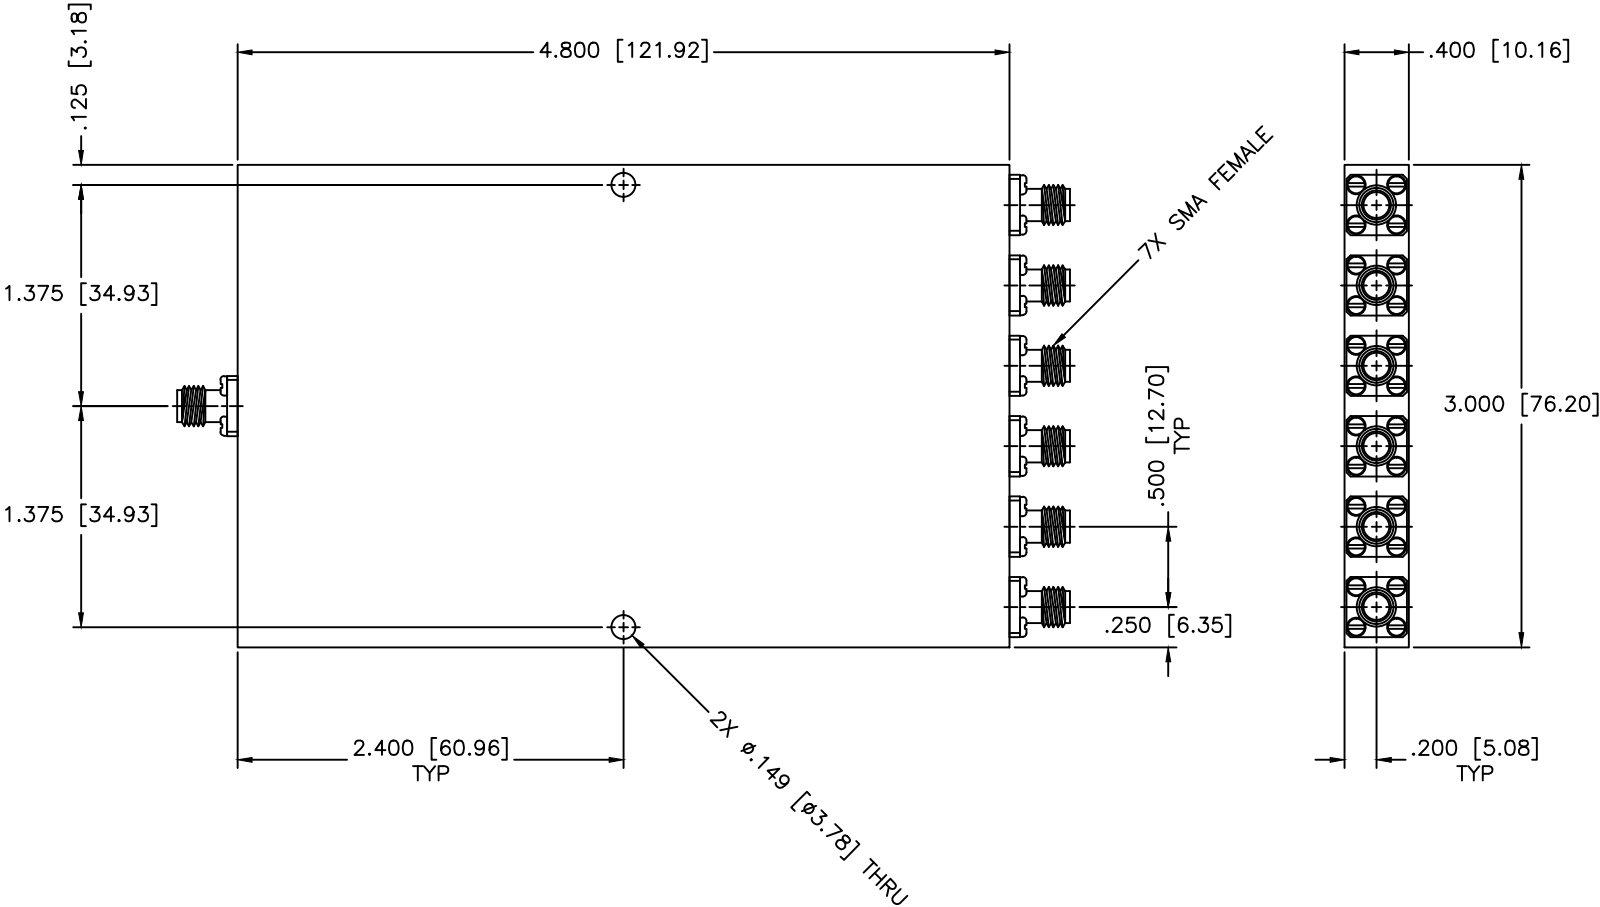

SPECIFICATIONS

Frequency Range: 5.6–6.4 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±12 Deg. Max.
 Amplitude Balance: ±1.5dB Max.
 VSWR: 1.65:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°			DRAWING TITLE: 6-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 12-21-1998		PART NO. PS6-20	
APPROVED: T. Nguyen		DATE: 12-21-1998		CAGE CODE: OD2L5	
		DISPOSITION NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A	REV: N/A
				DWG NO. 82060	
				DO NOT SCALE THE DRAWING	