



### ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-3GHZ 1DB RANGE)

#### Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power upon request
- Custom Configurations Available Upon Request.





#### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G3A01	DC-2.5GHz	2	1	0.1	1.35	<0.60	± 0.4

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

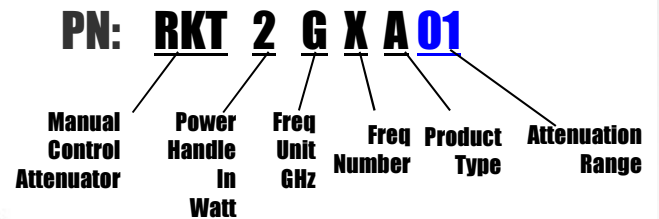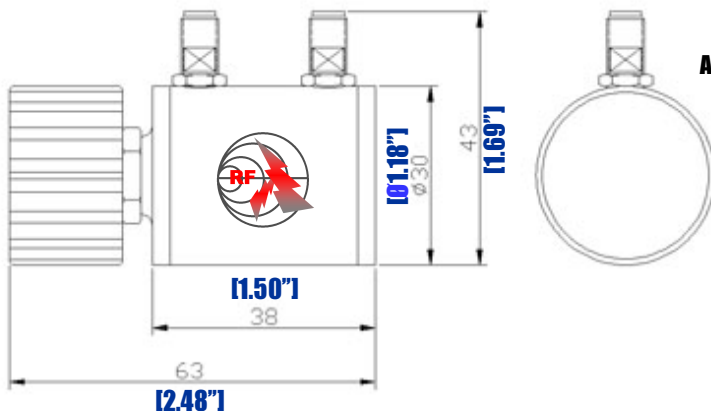

MANUAL CONTROL ROTARY ATTENUATOR (DC-3GHZ 1DB RANGE)







# RF-LAMBDA

The power beyond expectations

## RKT2G3A01

MANUAL CONTROL ROTARY ATTENUATOR (DC-3GHz 10B RANGE)

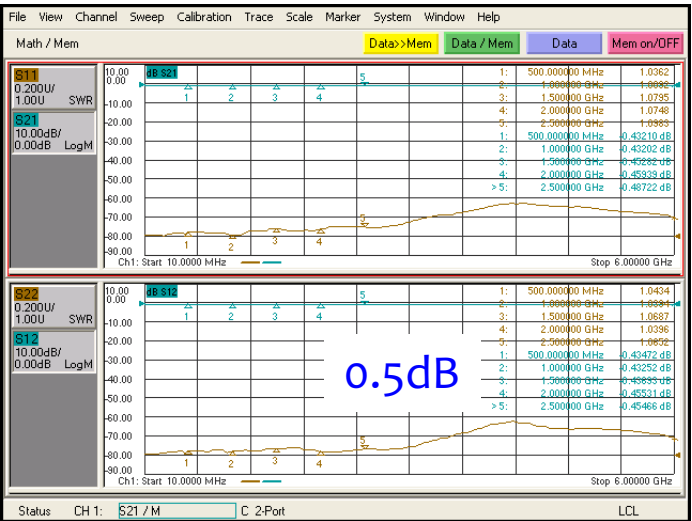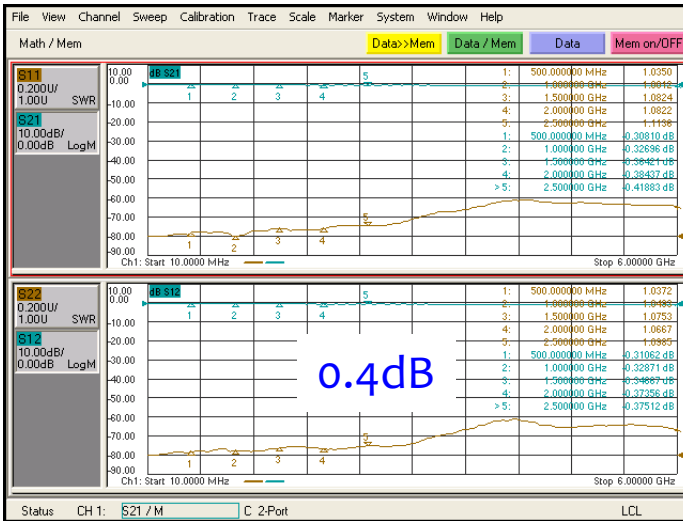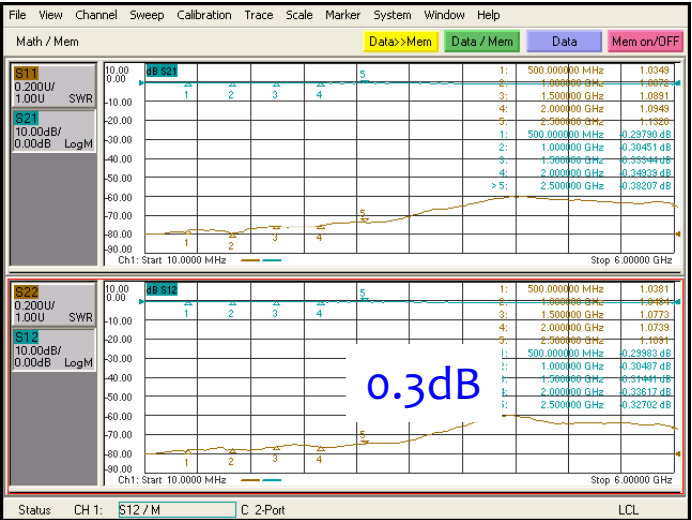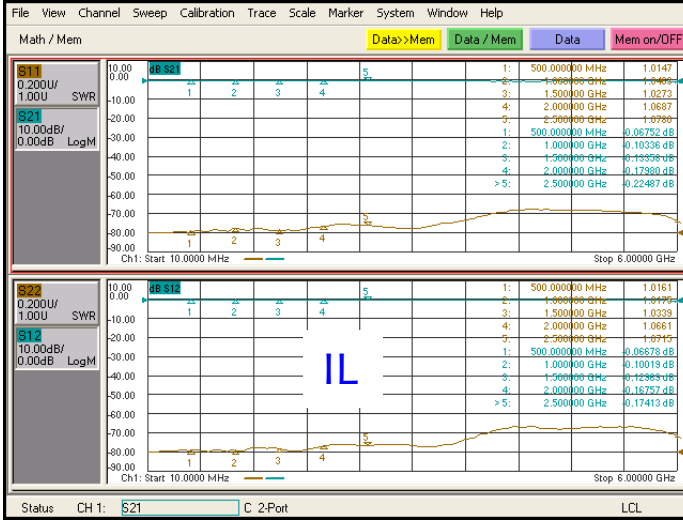



# RF-LAMBDA

The power beyond expectations

## RKT2G3A01

MANUAL CONTROL ROTARY ATTENUATOR (DC-36GHZ 10DB RANGE)

