

PIN	CONNECTION
1	Freq adjustment
7	Ground
8	Output
14	Supply

Features

- ▶ Ultra high stability
- ▶ Compact 14-pin DIL package (SMD optional)
- ▶ 5.0V supply voltage
- ▶ HCMOS compatible output
- ▶ Very fast warmup
- ▶ Low power consumption
- ▶ Wide temperature range available

Standard Frequencies

Frequencies in MHz	
10.00000	20.00000
12.80000	26.00000
16.00000	40.00000
16.38400	50.00000
19.44000	52.00000

Specifications

Parameters	Product	Option Codes
	SCOCXOVT	
Frequency range: 10.0kHz ~ 54.0MHz	■	
Frequency stability: ±0.3ppm max first year ±2.5ppm max in 10 years ±0.1ppm over V_{DD} ±0.2V ±0.01ppm over 10% change in load	■ ■ ■ ■	
Short term stability: 1×10^{-10} , 0.1 to 30s 5×10^{-11} over 1s typ	■ ■	
Temperature stability: ±0.025ppm max, 0 to +60°C ±0.05ppm max, -20 to +70°C ±0.1ppm max, -40 to +85°C	□ □ □	A B C
Operable temperature range: -40 to +85°C	■	
Storage temperature range: -65 to +125°C	■	
Output waveform: HCMOS compatible '0' = +0.4V max, '1' = 4.5V min 40:60 max	■ ■ ■	
Rise / fall times: 7ns / 7ns max	■	
Frequency adjustment: Control voltage (pin 1) ±2.5ppm min, 0.5V to 5.0V Variable resistor (pins 1 to 7) ±2.5ppm min, 0 ~ 10kΩ	□ □	V5 R1
Supply voltage (V_{DD}): +5.0V (±0.2V)	■	
Input current: 80mA max @ +30°C 120mA max @ -20°C	■ ■	
Warm up: within spec after 60s @ 30°C current 250mA max during 10s	■ ■	
Phase noise (typ @ 10MHz): -100dBc/Hz @ 10Hz -130dBc/Hz @ 100Hz -140dBc/Hz @ 1kHz -145dBc/Hz @ 10kHz	■ ■ ■ ■	
Shock & vibration: 2,000G, 0.3ms ½-sine 10.0 ~ 2,000Hz, 10G	■ ■	

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + option codes + frequency


eg: **SCOCXOVT-AR1 10.0MHz**

SCOCXOVT-BV5 16.0MHz


Option code X (eg SCOCXOVT/X) denotes a custom spec.

◆ Product is NOT designed to withstand 260°C reflow processing

Option D1

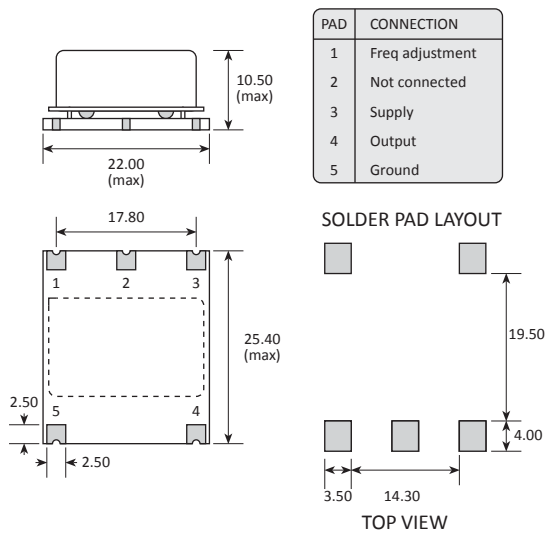

Option D2

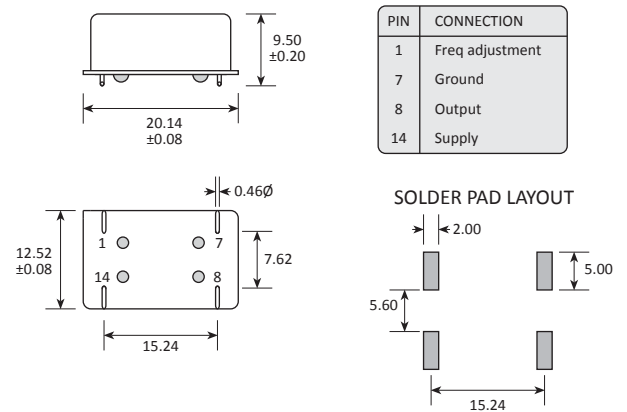

Soldering Profile

