



30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET

PE70A5001

The PE70A5001 is a 5 Bit Programmable 30 dB Pin Diode Attenuator with Step Resolution as Low as 1 dB over the Operating Frequency Range from 0.1 GHz to 18 GHz. The RF Input/Output Connectors are 2.92mm Female. Along with a 15 Pin Micro-D Female Control Socket. The unit is shipped with a Micro-D Mating Connector.

Features

- 5 Bit Programmable 30 dB Pin Diode Attenuator
- 0.1 GHz to 18 GHz Frequency Range
- 30 dB Attenuation Range
- Step Resolution of 1 dB
- Insertion Loss 5 dB Typ
- RF Connectors are 2.92mm Female
- 15 Pin Micro-D Female Connector

Applications

- Electronic Warfare
- Test & Measurement
- Military & Space
- Radar
- Military Communications Systems

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.1		18	GHz
Mean Attenuation Range	0		30	dB
Insertion Loss		5		dB
Input VSWR		2.5:1		
Power Rating		24		dBm
Input at 1 dB Compression Point		+20		dBm
Accuracy of Attenuation				
0 dB to 30 dB		±2.5		dB
Step Size	1			dB
Switching Time				
On Time			1	µs
Off Time			0.5	µs
DC Power Supply @ 50 mA		15		Volts
Logic Input				
Logic "0" (Bit Off)	0		0.8	Volts
Logic "1" (Bit On)	2		5	Volts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](#)



30 dB With 5 Bit Programmable TTL Controlled
Attenuator, 2.92mm Female To 2.92mm Female,
1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET

PE70A5001

Mechanical Specifications

Size

Length	2 in [50.8 mm]
Width	1.8 in [45.72 mm]
Height	0.5 in [12.7 mm]
Weight	0.2 lbs [90.72 g]
Connector 1	2.92mm Female
Connector 2	2.92mm Female

Environmental Specifications

Temperature

Operating Range	-50 to +85 deg C
Storage Range	-65 to +125 deg C

Humidity	MIL-STD-202F, METHOD 103B COND. B
Shock	MIL-STD-202F, METHOD 213B COND. B
Vibration	MIL-STD-202F, METHOD 204D COND. B
Altitude	MIL-STD-202F, METHOD 105C COND. B
Temperature Cycle	MIL-STD-202F, METHOD 107

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](#)




30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET

PE70A5001

Performance Data

Attenuation vs. Frequency Plot

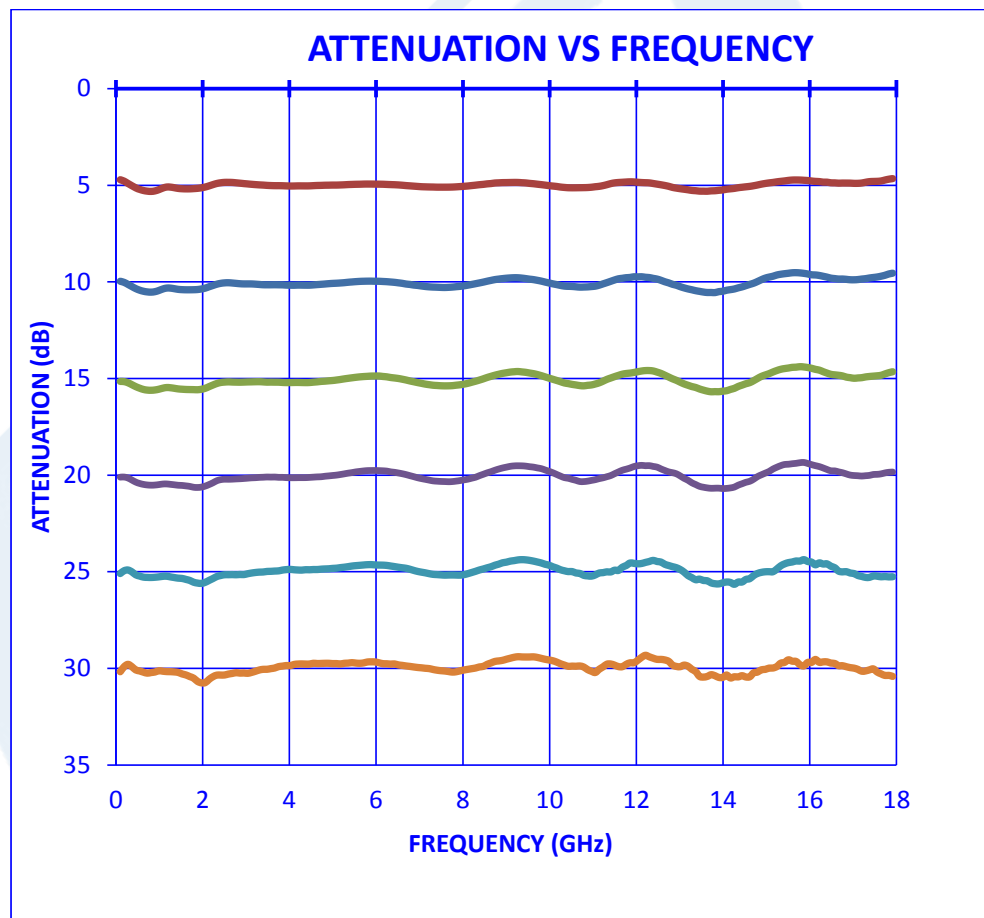

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](#)






30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET

PE70A5001

Insertion Loss & Return Loss

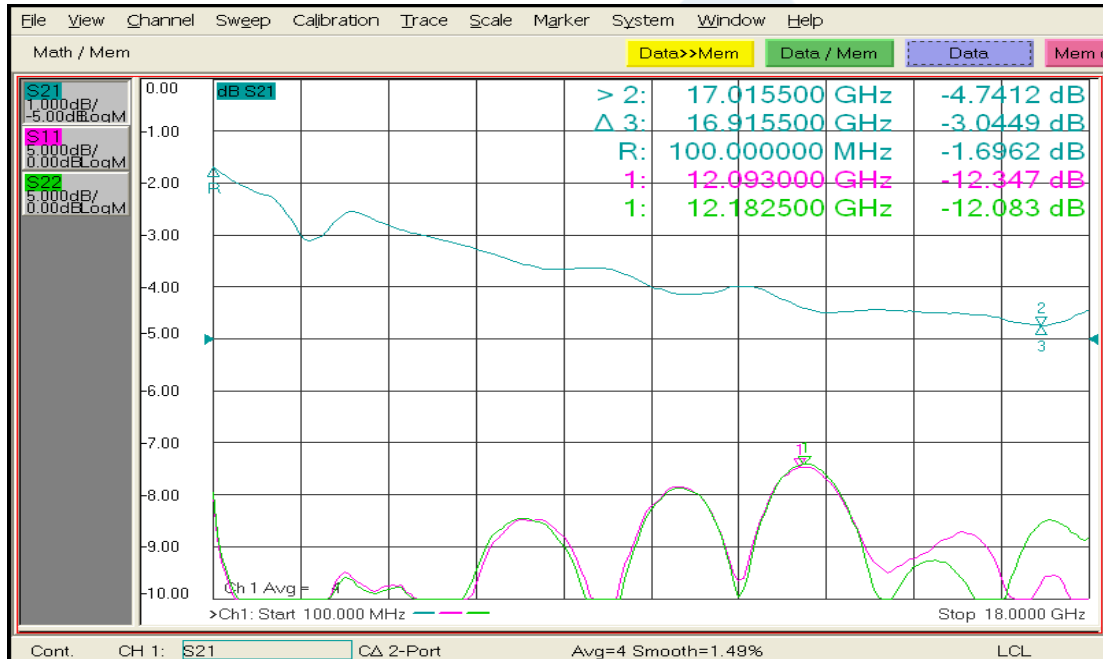

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](#)







30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET PE70A5001

-15dB Attenuation

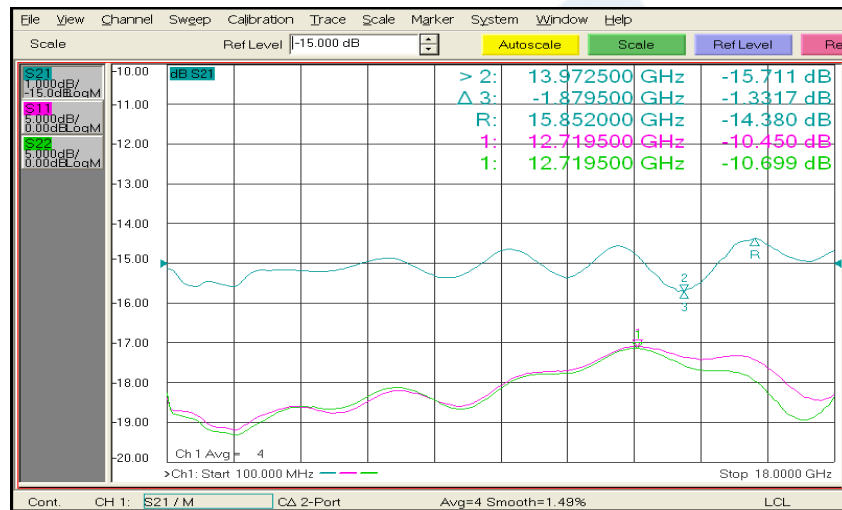

-30dB Attenuation

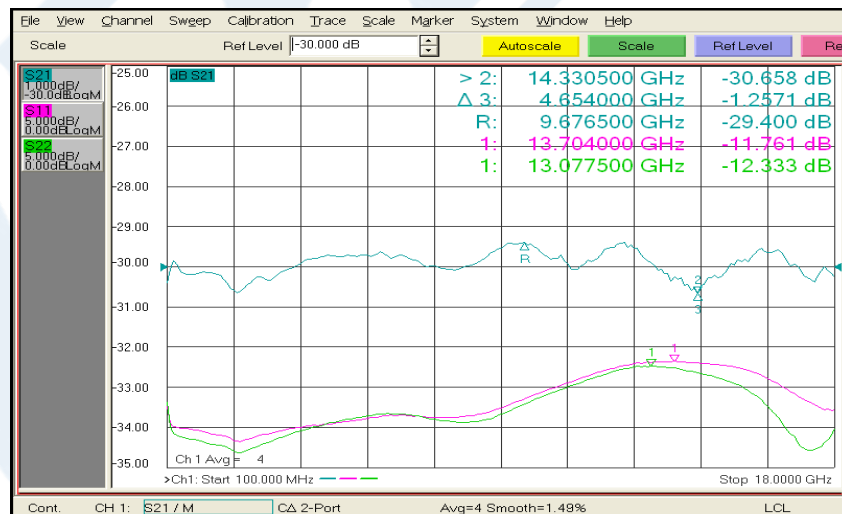

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](#)





30 dB With 5 Bit Programmable TTL Controlled
Attenuator, 2.92mm Female To 2.92mm Female,
1 dB Steps From 100 MHz To 18 GHz

TECHNICAL DATA SHEET

PE70A5001

30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz PE70A5001](http://www.pasternack.com/30db-programmable-2.92mm-female-2.92mm-female-0-watts-attenuator-pe70a5001-p.aspx)

URL: <http://www.pasternack.com/30db-programmable-2.92mm-female-2.92mm-female-0-watts-attenuator-pe70a5001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE70A5001 CAD Drawing

30 dB With 5 Bit Programmable TTL Controlled Attenuator, 2.92mm
Female To 2.92mm Female, 1 dB Steps From 100 MHz To 18 GHz

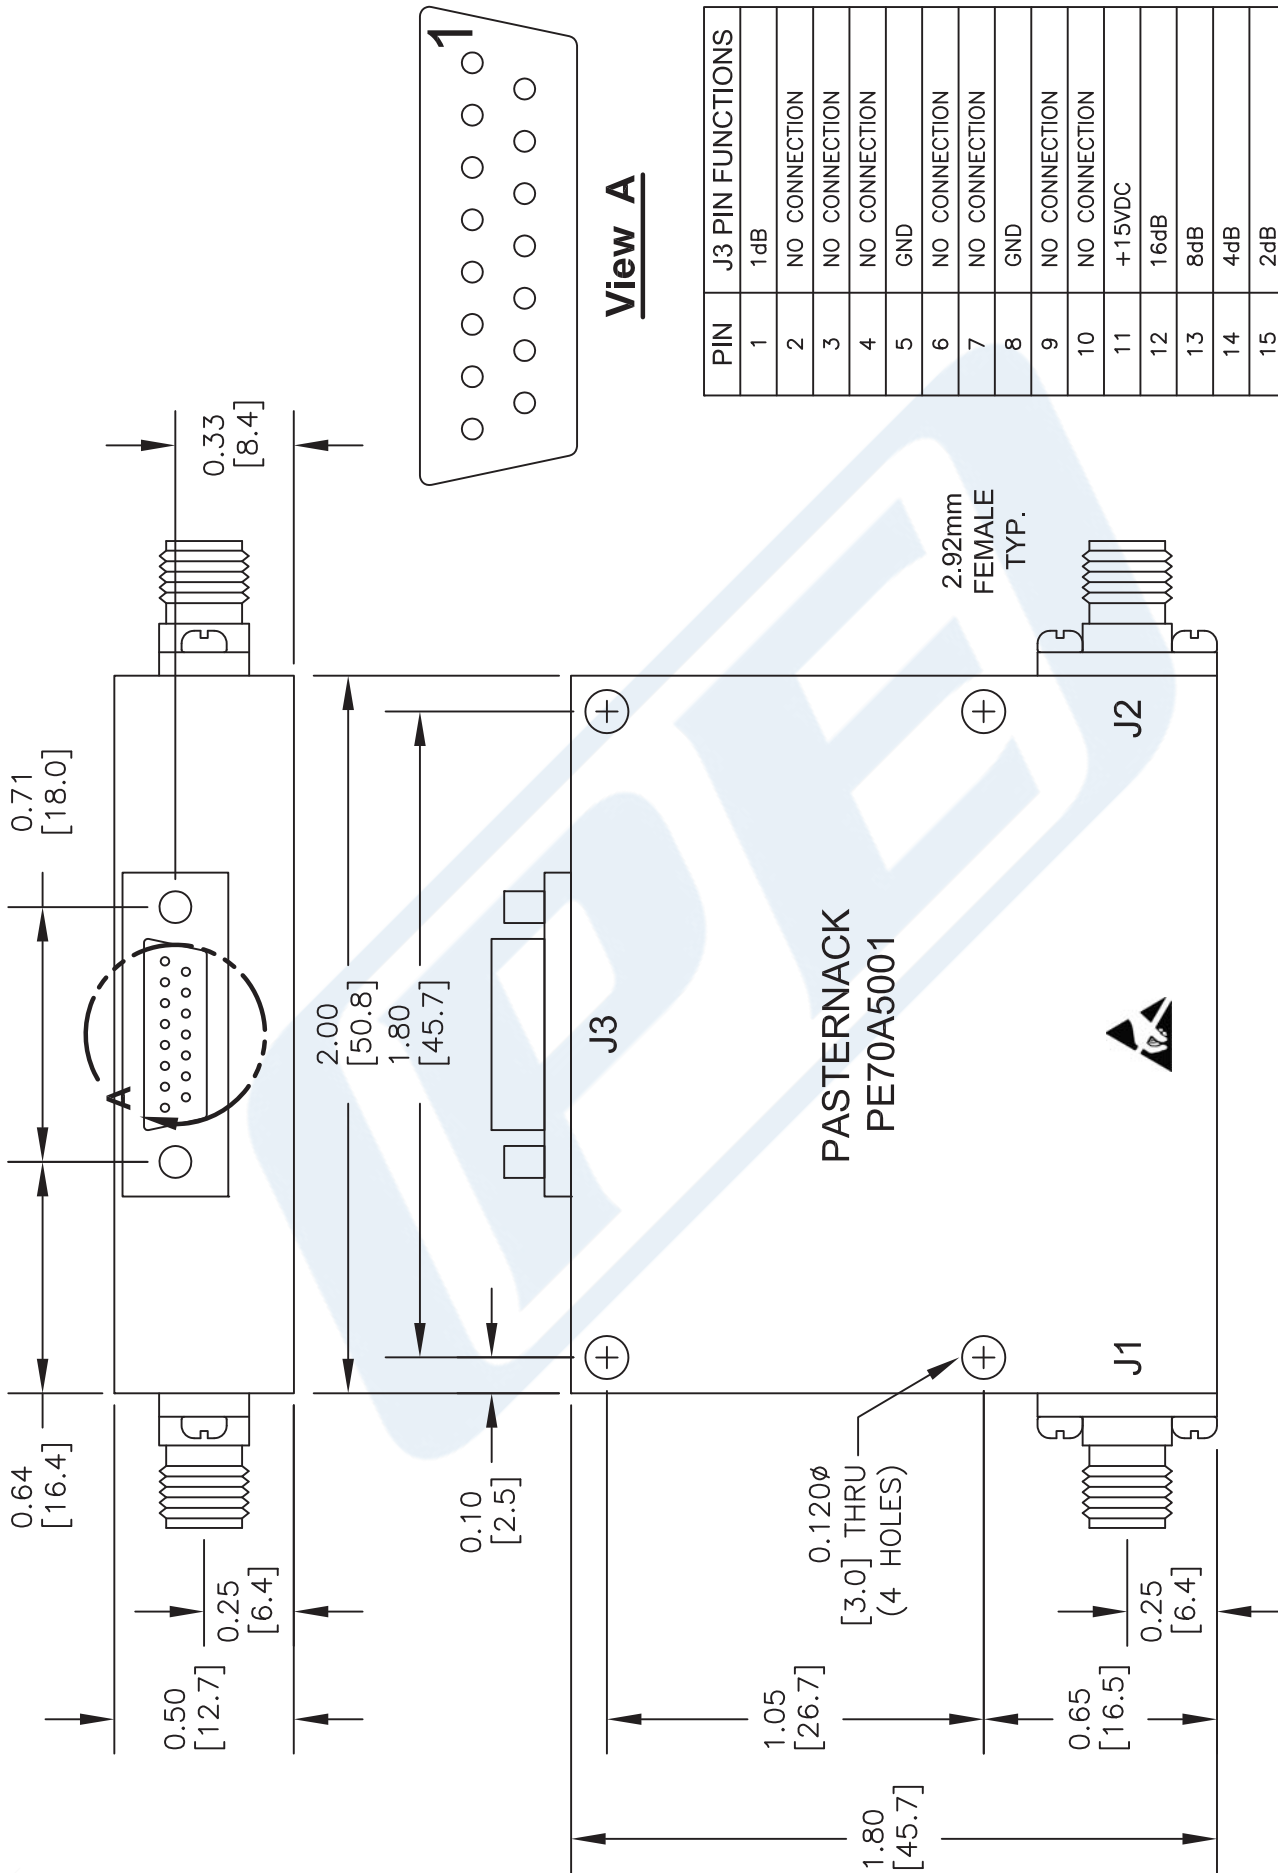

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE70A5001

FSCM NO. 53919

CAD FILE 060515

SCALE N/A

SIZE A

2233

PE PASTERNAK
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com