


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

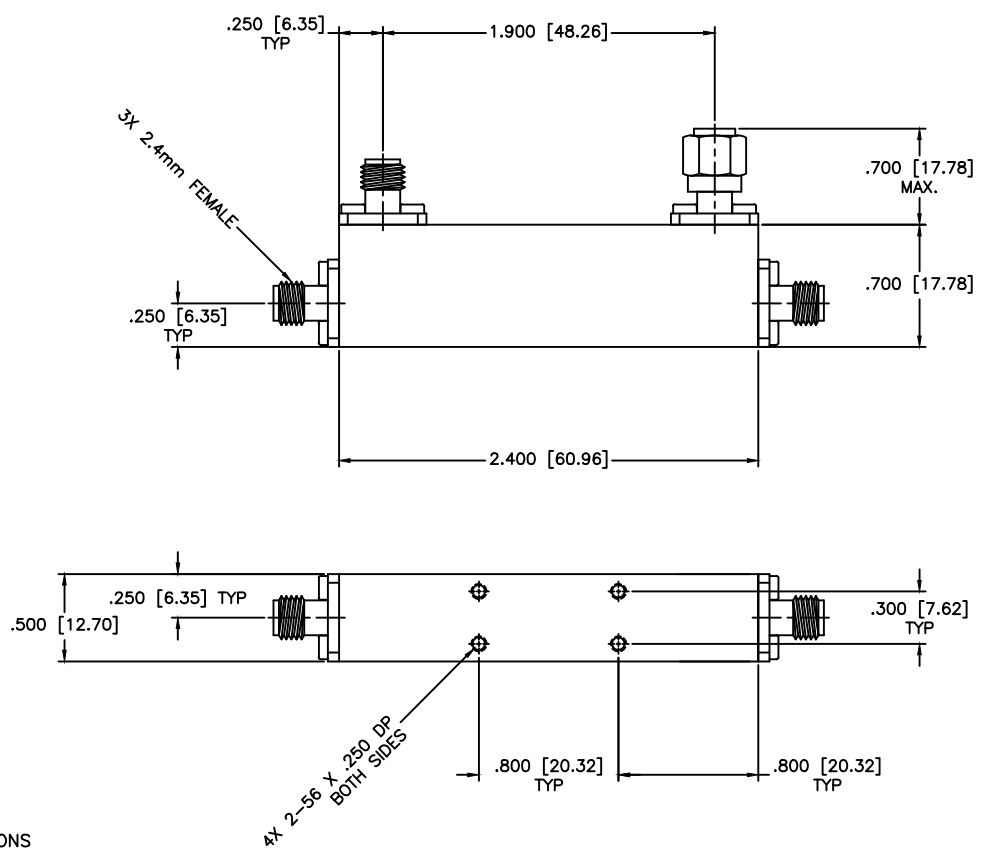

SPECIFICATIONS

- Frequency Range: 2–50 GHz
- VSWR: 1.80:1 Max.
- Coupling: 13±1.0dB
- Insertion Loss: 1.8dB Max.
- Directivity: 10dB Min.
- Frequency Sensitivity: ±0.80dB
- Power Rating: 16W Avg, 3kW Peak
- Operating Temperature: -32°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. CB127-13		
DATE: 02-24-2015		CAGE CODE:		
APPROVED: T. Nguyen		DATE: 02-24-2015		
THIRD ANGLE PROJECTION		SIZE:	N/A	REV:
		OD2L5	N/A	DWG NO. 86573
DO NOT SCALE THE DRAWING				