



AS0825-500 800 MHz TO 2.5 GHz 500 WATT BROADBAND POWER AMPLIFIER



- High reliability GaAs transistor technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Unique five year parts, labour and shipping warranty
- Integral directional coupler
- RS232, USB and ethernet or RS232 and GPIB

This innovative amplifier combines a compact design with market leading performance. Its ability to operate into any load without fold back makes this an ideal amplifier for all EMC RF immunity testing. The amplifier is supported via Milmega's unique five year parts, labour and shipping warranty and Teseq's local service network.


Designed specifically for radiated EMC testing, this mismatch tolerant amplifier delivers power continuously into the poor and variable match typically associated with EMC antenna.

A selection of remote interfaces are available and the user can select, at time of ordering, either the internal RS232, USB and ethernet or the external RS232 and GPIB unit housed in a 1U module at no additional cost.

The GaAs balanced pair design at the core of the amplifier ensures a high reliability, linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and RF interlock condition.

Measured data

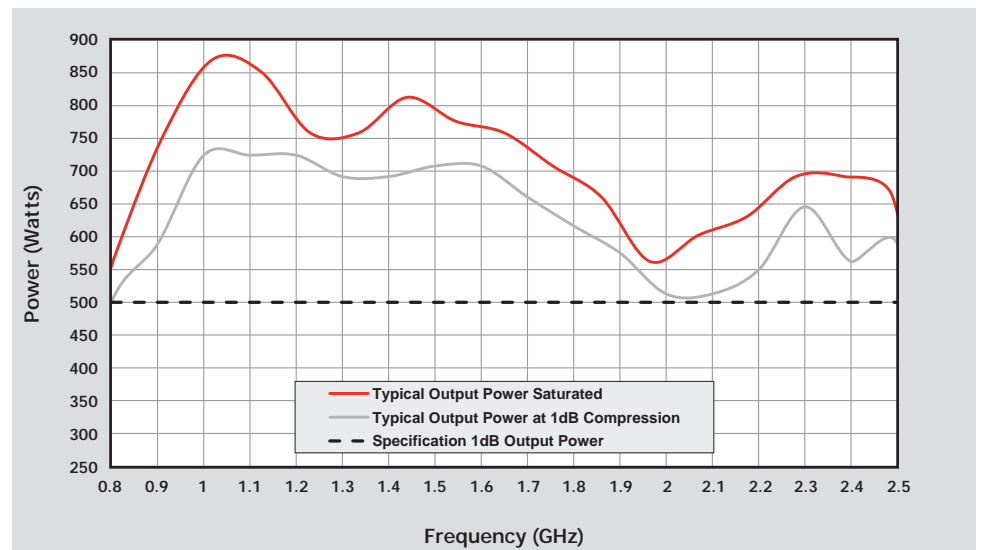

AS0825-500

800 MHz TO 2.5 GHz 500 WATT BROADBAND POWER AMPLIFIER

Key RF Parameters

| | |
|---------------------------------------|-----------------|
| Frequency range (instantaneous) | 0.8 to 2.5 GHz |
| Rated output power | 560 W minimum |
| Power at 1 dB gain compression (P1dB) | 500 W minimum |
| Harmonics at P1dB | -20 dBc typical |
| Gain | 53 dB |
| Gain variation with frequency | +/-2 dB |
| Maximum input power (no damage) | 15 dBm |

Impedance / VSWR

| | |
|-----------------------|--------------------|
| Output VSWR tolerance | Infinite any phase |
| Stability | Unconditional |
| Output impedance | 50 Ohm |
| Output VSWR | 2:1 typical |
| Input VSWR | 2:1 max |

Additional RF Data

| | |
|---------------------------------|------------------------------------------------------|
| Third order intercept point IP3 | 10 dB > P1dB |
| Spurious | -70 dBc max (-80 dBc typical) |
| Noise figure | 6 dB |
| RF connector style | Input = type N female, output = type 7 / 16th female |

Electrical and Interfaces

| | |
|----------------------------------------|----------------------------------------------------------------------------------------|
| Remote control | Internal RS232, USB and ethernet or RS232 and GPIB in additional external 1U high unit |
| Safety interlock | Rear panel mounted BR2-female |
| Supply voltage (single or three phase) | 90 to 132 or 180 to 240 VAC +/-10% |
| Supply frequency | 50 to 60 Hz |
| Supply power | <8.3 kVA |

Physical / Environmental

| | |
|-----------------------------|-----------------------------------|
| Case dimensions | 19 inch, 16U case, 780 mm deep |
| Mass | 94 kg |
| Operating temperature range | 0 to 40° C (storage -40 to 70° C) |

MILMEGA
Park Road, Ryde, Isle of Wight, PO33 2BE, UK
T +44 (0) 1983 618004 F +44 (0) 1983 811521
sales@milmega.co.uk www.milmega.co.uk
www.teseq.com

© November 2013 MILMEGA
Specifications subject to change without notice.
Teseq® is an ISO-registered company. Its products are designed and manufactured under the strict quality and environmental requirements of the ISO 9001. This document has been carefully checked. However, Teseq® does not assume any liability for errors or inaccuracies.