



Directional 16 dB SMA Coupler From 2 GHz
to 18 GHz Rated To 25 Watts

TECHNICAL DATA SHEET

PE2215-16

Directional 16 dB SMA Coupler From 2 GHz to 18 GHz Rated To 25 Watts

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

Electrical Specifications

Frequency Range, GHz	2 to 18
Directivity, dB	12
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.9
Maximum Input Power, Watts	25
Maximum Input VSWR	1.35:1
Maximum Secondary Line VSWR	1.4:1
Peak Power, KWatts	3
Coupling Value, dB	16
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.5

Mechanical Specifications

Size

Length, in [mm]	2.84 [72.14]
Width, in [mm]	0.5 [12.7]
Height, in [mm]	1.2 [30.48]

Connector 1

Type	SMA Female
------	------------

Connector 2

Type	SMA Female
------	------------

Connector 3

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 16 dB SMA Coupler From 2 GHz to 18 GHz Rated To 25 Watts PE2215-16](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





Directional 16 dB SMA Coupler From 2 GHz
to 18 GHz Rated To 25 Watts

TECHNICAL DATA SHEET

PE2215-16

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Directivity: 15 minimum for 2-12.4 GHz, 12 minimum for
12.4-18 GHz

Directional 16 dB SMA Coupler From 2 GHz to 18 GHz Rated To 25 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 16 dB SMA Coupler From 2 GHz to 18 GHz Rated To 25 Watts PE2215-16](http://www.pasternack.com/directional-16-db-sma-coupler-2-18-ghz-25-watts-pe2215-16)

URL: <http://www.pasternack.com/directional-16-db-sma-coupler-2-18-ghz-25-watts-pe2215-16-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2215-16 CAD Drawing

Directional 16 dB SMA Coupler From 2 GHz to 18 GHz Rated To 25 Watts

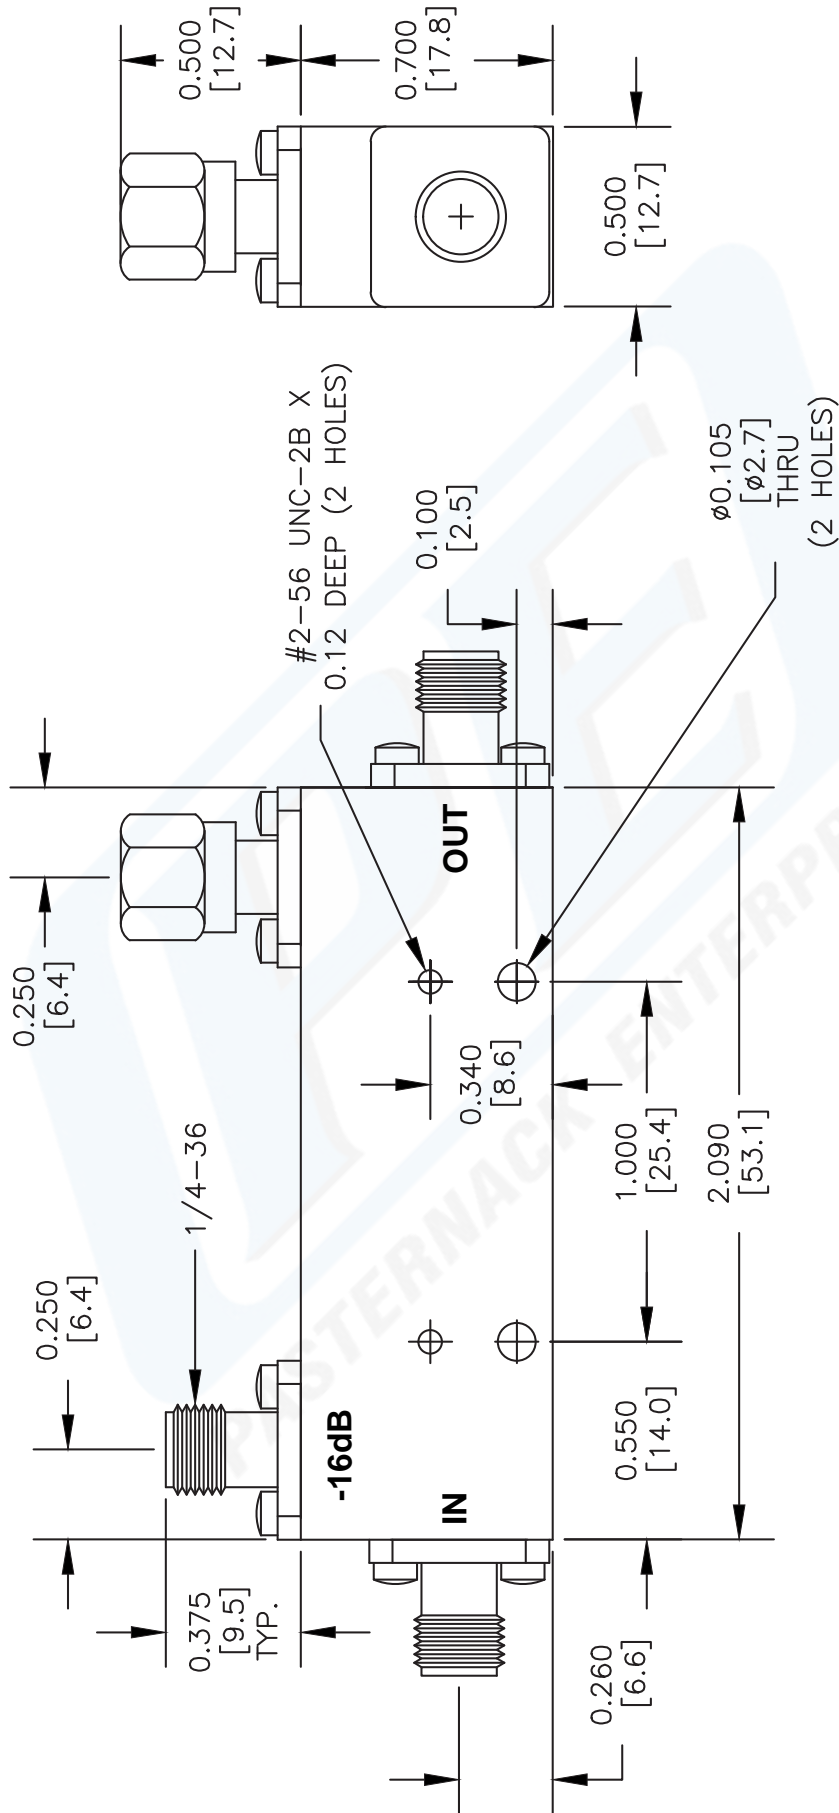

DWG TITLE

PE2215-16

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 092908

PE PASTERNAK®

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com