


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

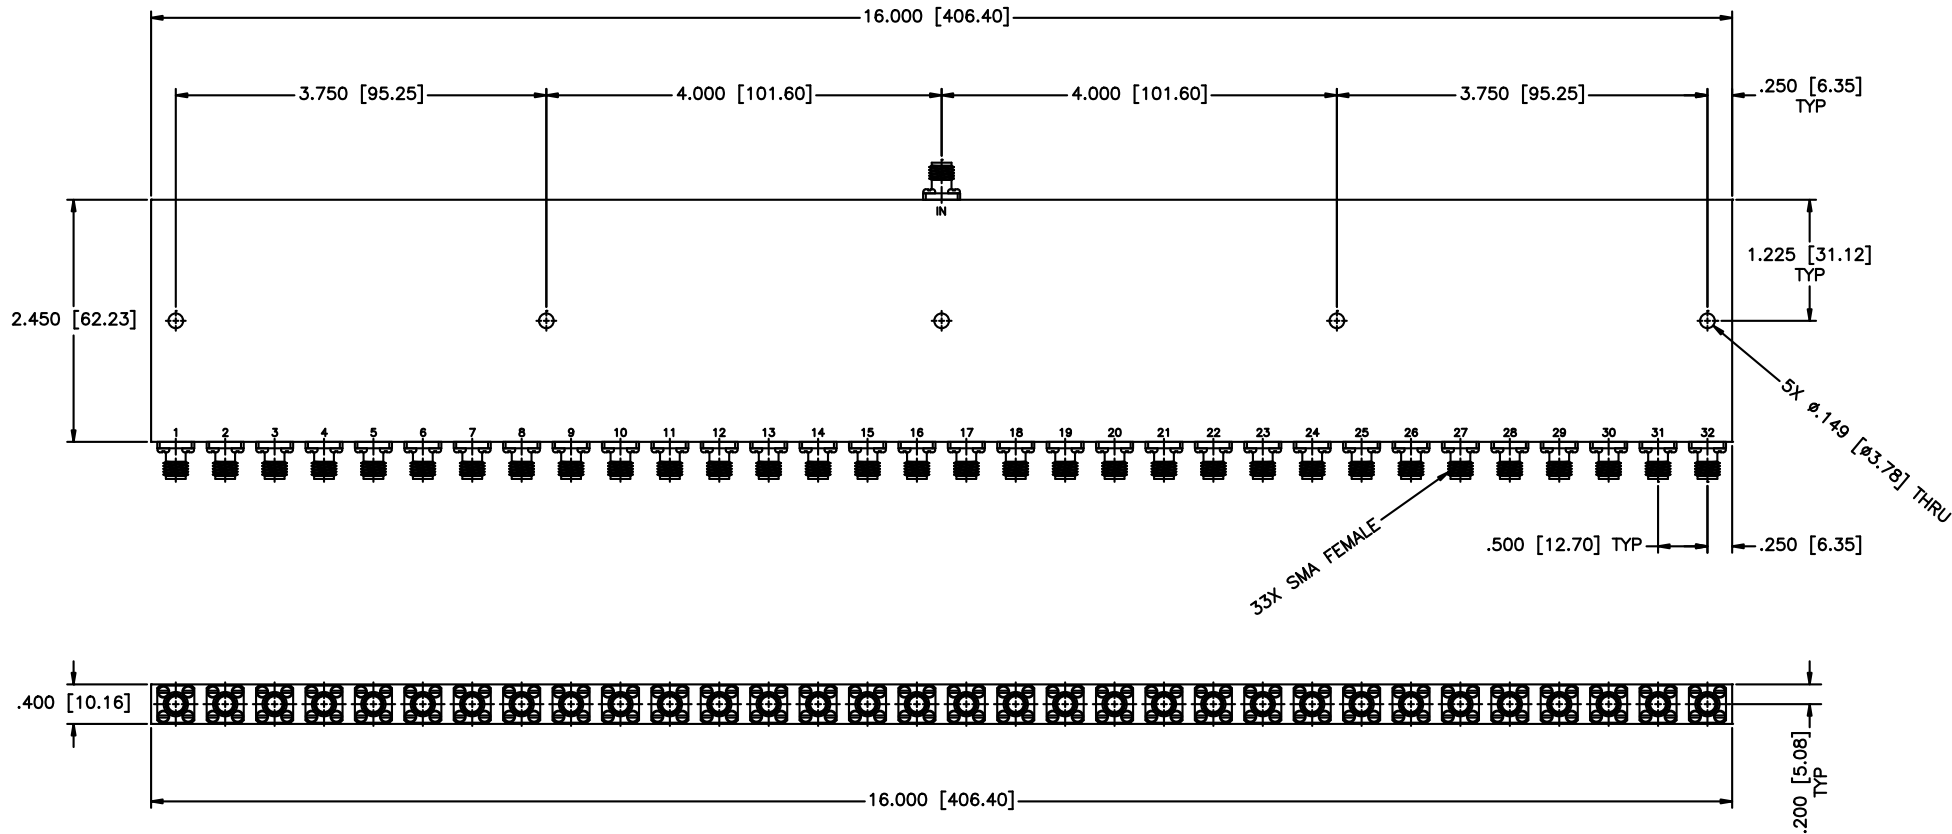

SPECIFICATIONS

Frequency Range: 5–18 GHz
 Insertion Loss: 5.8dB Max.
 Isolation: 12dB Min.
 Power Handling: 20 Watts Max.
 VSWR: 1.90:1 Max.
 Amplitude Balance: ±1.2dB Max.
 Phase Balance: ±12 Deg. Max.

MATERIAL:	
/	
DRAWN: Paiboon Luekhamhan	DATE: 04-09-2012
APPROVED: T. Nguyen	DATE: 04-09-2012

MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 32-WAY POWER DIVIDER		PART NO. PS32-10	
CAGE CODE: OD2L5	SIZE: C	REV: N/A	DWG NO. 86069
DO NOT SCALE THE DRAWING			

33X SMA FEMALE

