

KR 2156-20-75 Lowpass Filter

General Description


KR 2156-20-75 is a 20 MHz lowpass filter. The filter has a 20 MHz min 1 dB bandwidth and is designed for 75 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- 20 MHz lowpass
- 75 Ω
- DIP Package

Typical Performance

Overall Response
(10 dB/div) 100 KHz to 1 GHz

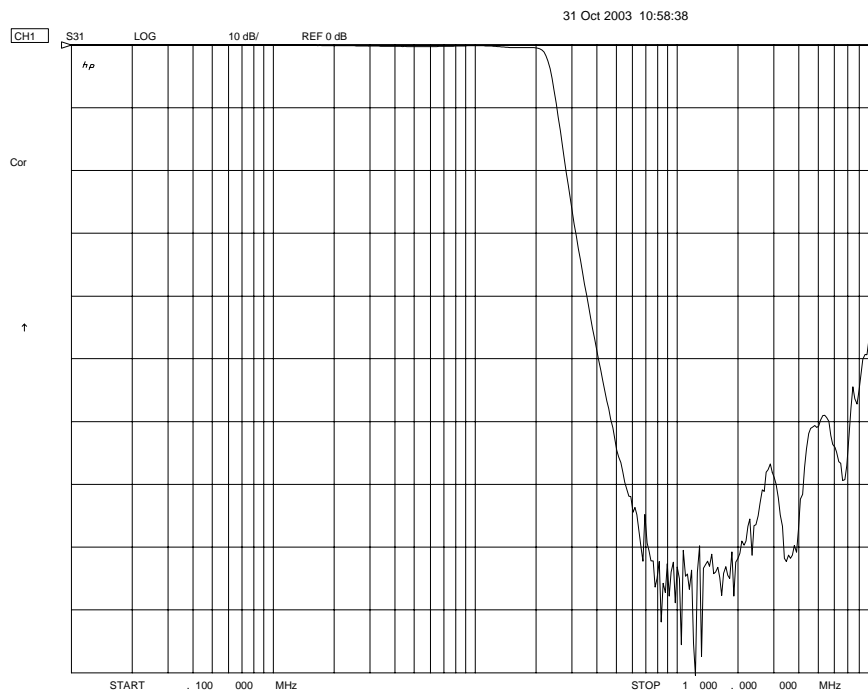


KR 2156-20-75

Specifications

| Parameter | Specification |
|-------------------------|---------------|
| Filter type | Lowpass |
| Insertion Loss | < 1 dB |
| Attenuation at 20 MHz | < 1 dB |
| Attenuation at 37.5 MHz | > 40 dB |
| Source & Load | 75 Ω |
| | |
| | |
| | |
| | |

Physical Dimensions

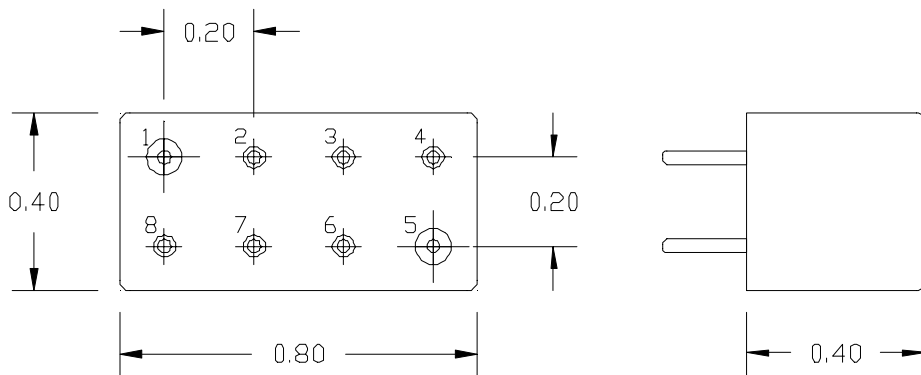

Metal Case
 Pin 1 is Input Pin 5 is Output
 All other Pins are Ground
 All leads .030" diameter
 Dimensions inches