


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

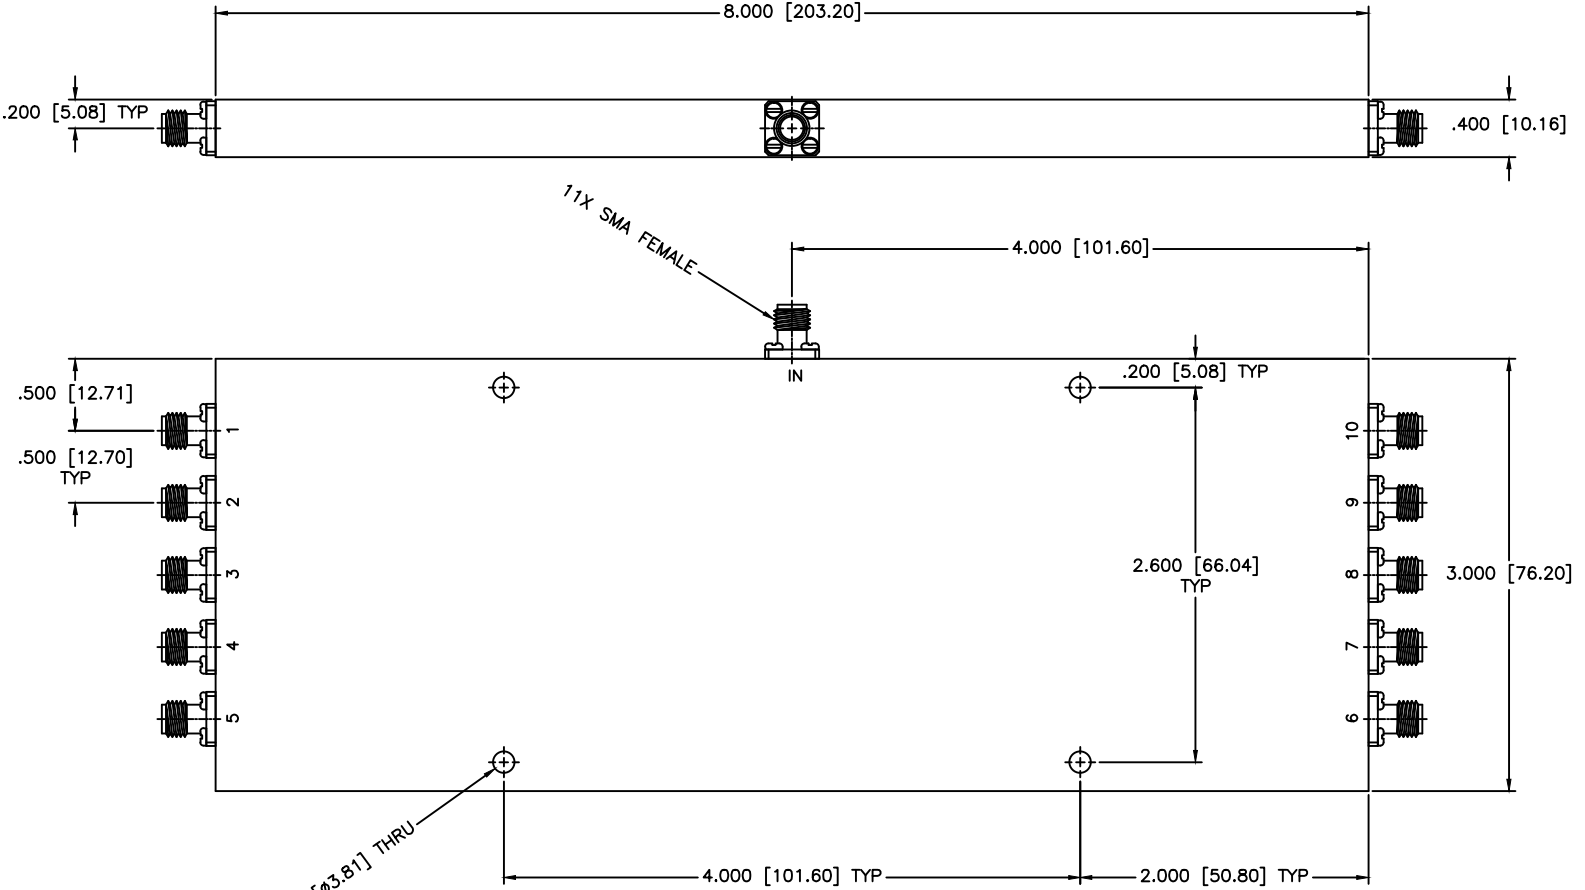

4X ϕ .150 [3.81] THRU

SPECIFICATIONS

Frequency Range: 2–6.6 GHz
 Insertion Loss: 2.5dB Max.
 Isolation: 12dB Min.
 Amplitude Balance: \pm 1.5dB Max.
 VSWR: 1.97:1 Max.
 Input Power: 1W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-14-2012
APPROVED: T. Nguyen	DATE: 03-14-2012

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .01 \pm .005 ANGLE: \pm 1/2°		SHEET:	N/A
DRAWING TITLE: 10-WAY POWER DIVIDER		PART NO.: PS10-17		
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE:	REV:
THIRD ANGLE PROJECTION		OD2L5	N/A	N/A
		DO NOT SCALE THE DRAWING		DWG NO.: 86027