



## 30 Watt RF Load Up To 4.2 GHz With SMA Female Input

### TECHNICAL DATA SHEET

PE6TR1000

#### Configuration

RF Load Design	Precision
Connector	SMA Female
Connection Method	Standard
Body Style	Straight

#### Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4.2	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power			30	Watts

#### Mechanical Specifications

##### Temperature

Operating Range +100 to -55 deg C

##### Size

Length 0.5 in [12.7 mm]  
Width/Dia. 1 in [25.4 mm]  
Height 0.41 in [10.41 mm]

##### Connector

Type SMA Female  
Body Material and Plating Stainless Steel, Gold

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant  
REACH Compliant 06/16/2014

#### Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt RF Load Up To 4.2 GHz With SMA Female Input PE6TR1000](#)



## 30 Watt RF Load Up To 4.2 GHz With SMA Female Input

### TECHNICAL DATA SHEET

PE6TR1000

30 Watt RF Load Up To 4.2 GHz With SMA Female Input from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt RF Load Up To 4.2 GHz With SMA Female Input PE6TR1000](http://www.pasternack.com/30-watts-sma-female-rf-load-up-to-4.2-ghz-precision-pe6tr1000-p.aspx)

URL: <http://www.pasternack.com/30-watts-sma-female-rf-load-up-to-4.2-ghz-precision-pe6tr1000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6TR1000 CAD Drawing

30 Watt RF Load Up To 4.2 GHz With SMA Female Input

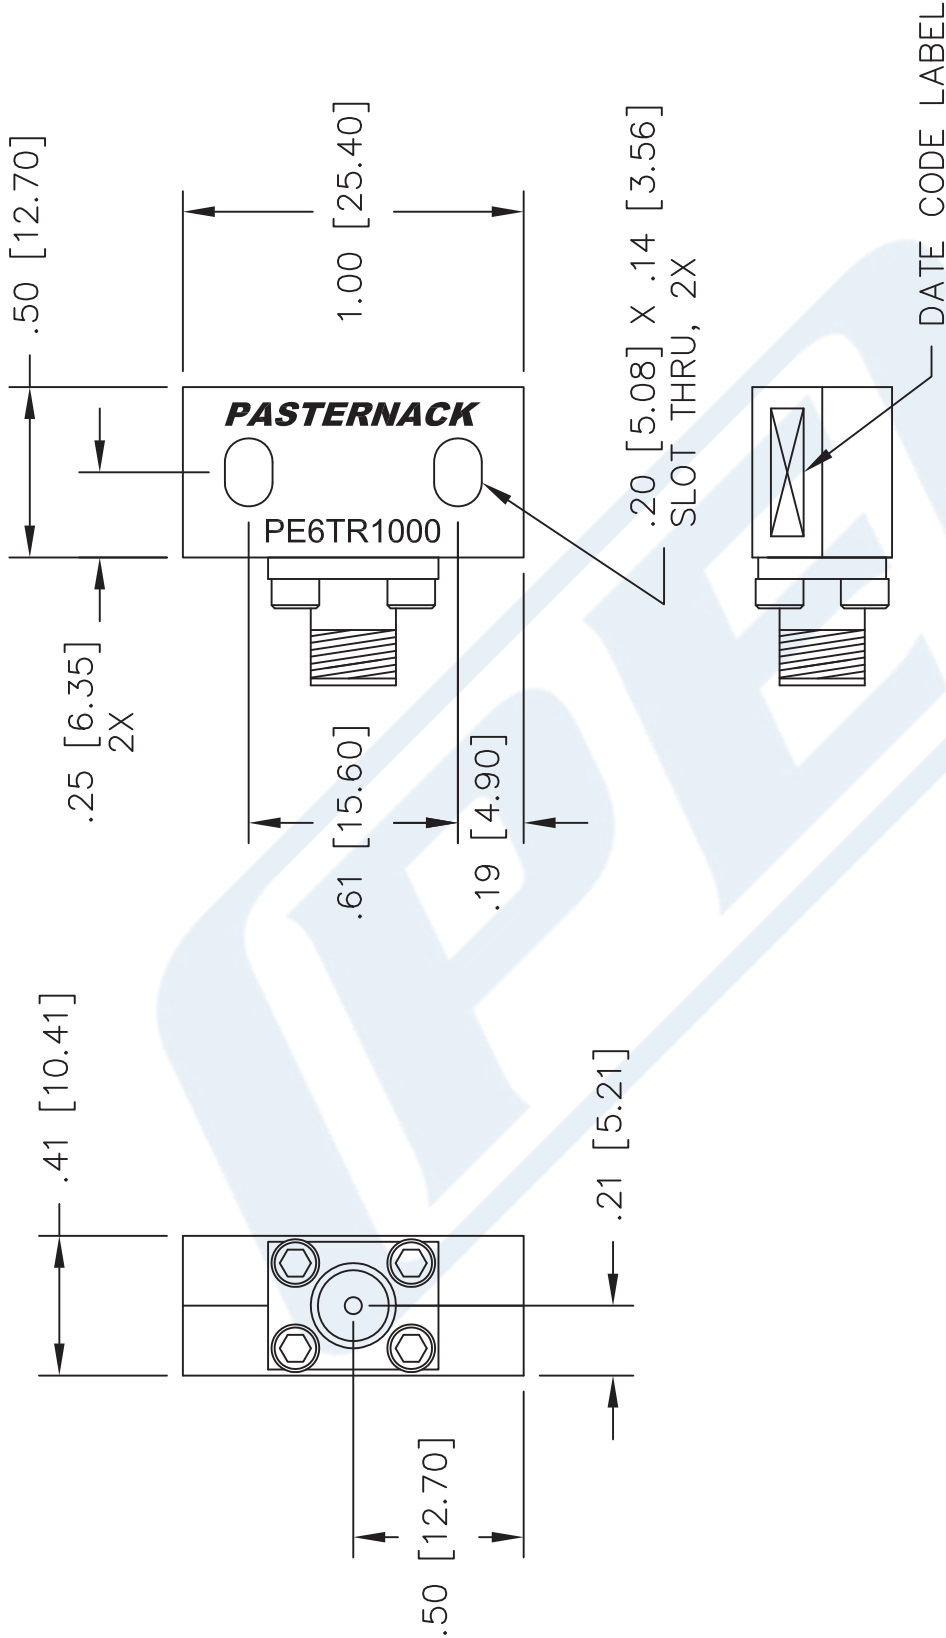

TOLERANCE .XX ±.02  
 .XXX ±.010  
 ANG. ±1/2°

\* THESE DIMENSIONS AND TOLERANCES  
 SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	
<b>PE6TR1000</b>	
FSCM NO. 53919	CAD FILE 040915
SCALE N/A	SIZE A
2233	

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com