

Coaxial

Voltage Controlled Oscillator

ZX95-3710+

Linear Tuning 3180 to 3710 MHz

Features

- linear tuning characteristics
- low phase noise
- low pulling
- low pushing
- protected by US patent 6,790,049

Applications

- r & d
- lab
- instrumentation
- wireless communications
- radio links
- defense communications & radar



CASE STYLE: GB956

| Connectors | Model | Price | Qty. |
|------------|--------------|-------------|-------|
| SMA | ZX95-3710-S+ | \$40.95 ea. | (1-9) |

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications


| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | | |
|------------|-------------|------|--------------------|---|-----|------|------|--------|-------------------|----------------------|---------------|-----------------------------|---------------------------------|------|----------------------------|-----------------|--------------------|------|------|
| | Min. | Max. | | Typ. | 1 | 10 | 100 | 1000 | VOLTAGE RANGE (V) | SENSI-TIVITY (MHz/V) | PORT CAP (pF) | | 3 dB MODULATION BANDWIDTH (MHz) | Typ. | | | Max. | Typ. | Typ. |
| ZX95-3710+ | 3180 | 3710 | +0.4 | -70 | -96 | -118 | -138 | 0.5 | 13 | 53-67 | 11 | 120 | -90 | -25 | -15 | 0.6 | 0.4 | 5 | 48 |

Maximum Ratings

| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 6V |
| Absolute Max. Tuning Voltage (Vtune) | 15V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

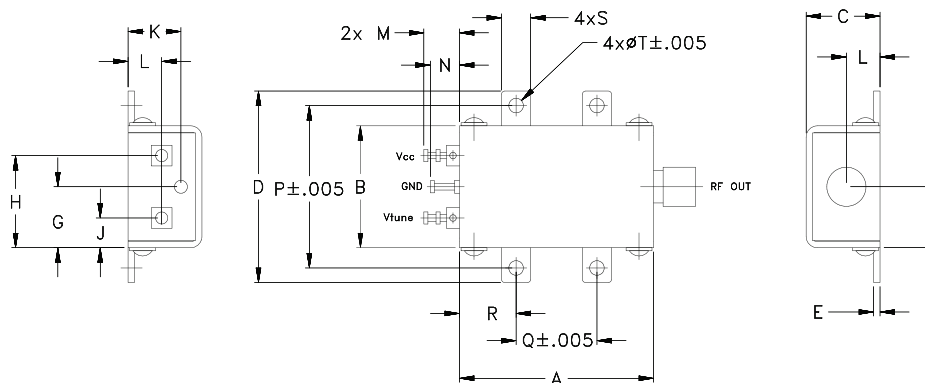

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. OR
M125394
EDR-9108F2
ZX95-3710+
RAV
120905
Page 1 of 2

Performance Data & Curves*

ZX95-3710+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 3445 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|-------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 106.55 | 3060.0 | 3036.3 | 3010.5 | 1.56 | 1.43 | 1.29 | 40.94 | -24.4 | -41.2 | -48.6 | 1.64 | 0.26 | -67.5 | -95.4 | -116.4 | -136.4 | 1.0 | -70.33 |
| 0.50 | 82.65 | 3111.0 | 3089.6 | 3062.2 | 1.61 | 1.48 | 1.21 | 40.91 | -24.0 | -42.5 | -44.6 | 0.39 | 0.44 | -67.3 | -94.7 | -115.8 | -136.5 | 2.0 | -78.75 |
| 1.00 | 74.77 | 3150.6 | 3130.9 | 3106.2 | 1.33 | 1.34 | 1.25 | 41.04 | -23.3 | -45.3 | -43.9 | 0.12 | 0.94 | -68.5 | -96.5 | -117.7 | -138.0 | 3.5 | -84.73 |
| 1.50 | 67.97 | 3188.1 | 3168.3 | 3141.5 | 1.49 | 1.16 | 0.95 | 40.96 | -23.0 | -47.6 | -45.4 | 0.17 | 0.19 | -70.7 | -96.4 | -118.2 | -138.1 | 6.0 | -90.38 |
| 2.00 | 62.44 | 3220.9 | 3202.3 | 3176.2 | 1.39 | 1.34 | 0.92 | 41.07 | -23.3 | -51.0 | -44.5 | 0.13 | 0.74 | -69.8 | -96.8 | -118.0 | -138.0 | 8.5 | -94.15 |
| 2.50 | 61.42 | 3252.6 | 3233.5 | 3207.0 | 1.19 | 1.15 | 1.03 | 41.07 | -23.3 | -53.2 | -43.4 | 0.16 | 0.25 | -71.7 | -96.2 | -117.9 | -138.2 | 10.0 | -95.94 |
| 3.00 | 58.79 | 3282.7 | 3264.2 | 3236.5 | 1.27 | 1.01 | 0.81 | 41.08 | -23.5 | -57.1 | -40.8 | 0.13 | 0.84 | -70.2 | -95.0 | -117.6 | -138.0 | 20.8 | -103.22 |
| 3.50 | 57.94 | 3312.5 | 3293.6 | 3265.3 | 1.19 | 1.06 | 0.68 | 41.06 | -24.0 | -58.6 | -39.7 | 0.12 | 0.47 | -70.2 | -97.1 | -117.9 | -138.0 | 35.5 | -108.49 |
| 4.00 | 56.00 | 3341.1 | 3322.6 | 3293.3 | 0.98 | 0.97 | 0.76 | 41.09 | -23.9 | -52.2 | -39.9 | 0.01 | 0.58 | -71.4 | -96.3 | -117.6 | -137.6 | 60.7 | -113.67 |
| 5.00 | 55.96 | 3397.9 | 3379.1 | 3347.5 | 0.98 | 0.57 | 0.48 | 41.04 | -24.3 | -48.9 | -40.3 | 0.05 | 0.03 | -69.2 | -95.3 | -118.0 | -137.9 | 86.7 | -116.70 |
| 6.00 | 54.95 | 3452.6 | 3434.3 | 3402.2 | 0.56 | 0.57 | 0.37 | 41.12 | -25.7 | -46.9 | -42.6 | 0.07 | 0.53 | -70.1 | -95.9 | -118.3 | -138.3 | 100.0 | -117.90 |
| 6.50 | 56.44 | 3480.6 | 3461.8 | 3428.9 | 0.50 | 0.22 | 0.31 | 41.08 | -25.7 | -43.5 | -47.2 | 0.19 | 0.43 | -68.1 | -96.8 | -118.2 | -138.4 | 148.1 | -121.48 |
| 7.00 | 55.30 | 3508.3 | 3490.0 | 3455.6 | 0.60 | 0.22 | -0.04 | 41.12 | -26.0 | -40.5 | -48.0 | 0.19 | 0.81 | -69.0 | -95.9 | -118.0 | -137.9 | 177.0 | -122.95 |
| 8.00 | 57.18 | 3564.1 | 3545.7 | 3511.1 | 0.09 | -0.02 | -0.04 | 41.14 | -28.0 | -37.9 | -45.2 | 0.26 | 0.72 | -69.2 | -95.7 | -117.9 | -138.3 | 211.6 | -124.65 |
| 9.00 | 59.03 | 3621.8 | 3603.6 | 3567.3 | 0.18 | -0.03 | -0.51 | 41.16 | -28.9 | -36.0 | -48.7 | 0.30 | 0.31 | -69.5 | -96.0 | -118.0 | -138.1 | 302.4 | -127.81 |
| 10.00 | 62.94 | 3681.9 | 3663.0 | 3625.9 | -0.27 | -0.42 | -0.39 | 41.18 | -29.6 | -35.9 | -43.0 | 0.35 | 0.31 | -70.2 | -95.6 | -117.9 | -137.5 | 361.5 | -129.25 |
| 10.50 | 63.03 | 3712.9 | 3694.4 | 3656.0 | -0.18 | -0.49 | -0.68 | 41.19 | -30.2 | -36.7 | -37.9 | 0.39 | 0.73 | -70.0 | -95.7 | -117.6 | -137.8 | 507.5 | -132.22 |
| 11.00 | 64.01 | 3744.3 | 3725.9 | 3687.4 | -0.34 | -0.40 | -0.85 | 41.22 | -30.9 | -38.0 | -34.5 | 0.36 | 0.58 | -70.5 | -96.6 | -117.9 | -138.2 | 606.7 | -133.83 |
| 12.00 | 66.21 | 3809.9 | 3791.2 | 3750.9 | -0.62 | -0.97 | -0.89 | 41.24 | -32.1 | -40.0 | -31.1 | 0.00 | 0.66 | -68.9 | -95.9 | -117.7 | -137.7 | 851.6 | -136.75 |
| 13.00 | 66.57 | 3876.6 | 3857.7 | 3816.4 | -1.21 | -1.02 | -1.23 | 41.27 | -34.0 | -39.9 | -31.7 | 1.21 | 0.71 | -68.4 | -95.8 | -117.4 | -137.3 | 1000.0 | -138.09 |

*at 25°C unless mentioned otherwise

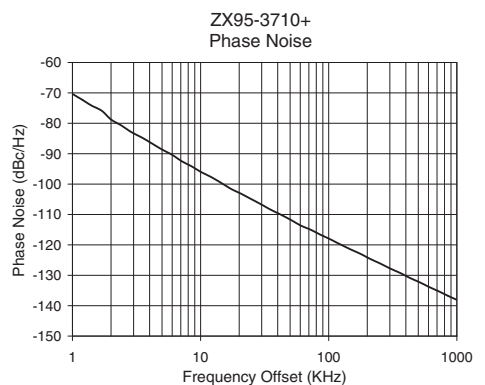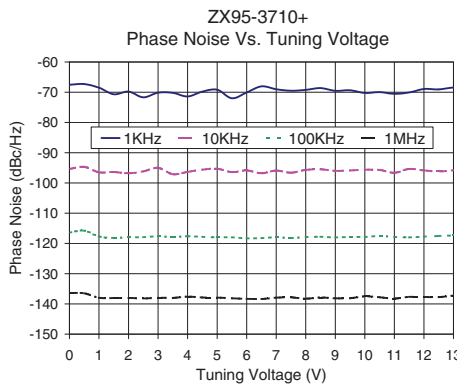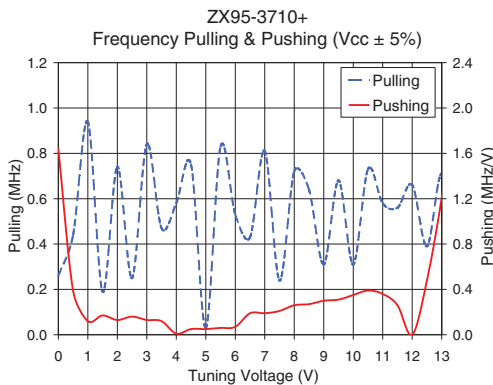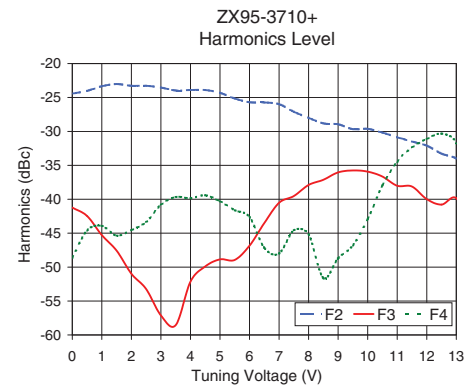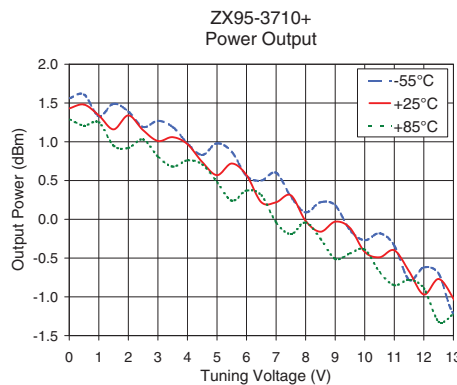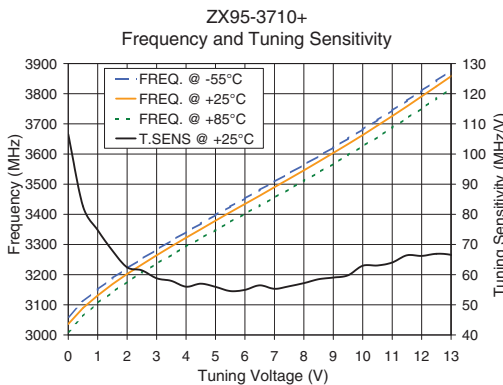

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.