


SPECIFICATIONS

Frequency Range: 2.5–2.7 GHz
 Insertion Loss: 1.2dB Max.
 Isolation: 16dB Min.
 VSWR: 1.70:1 Max.
 Amplitude Balance: ±0.8dB Max.
 Power: 20W

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

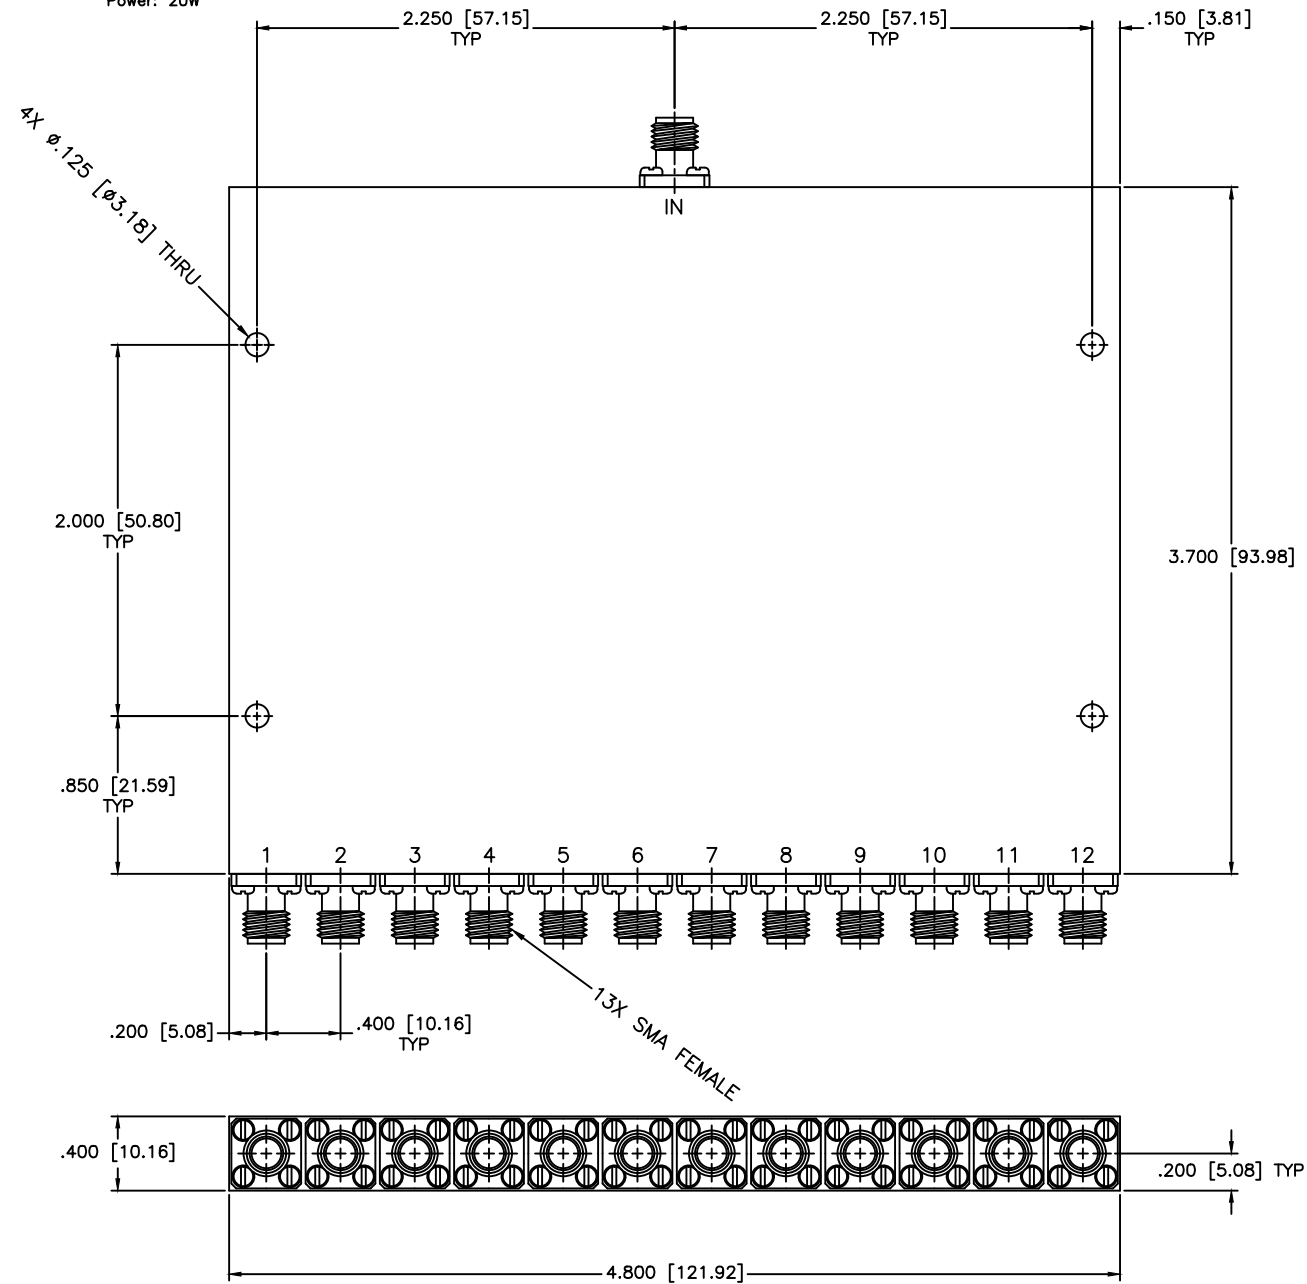

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
				SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 12-WAY OUTLINE DRAWING		
		PART NO. PS12-11		
DRAWN: Paiboon Luekhamhan	DATE: 03-29-2012	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen	DATE: 03-29-2012	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 86046	
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		