



1000W1000E

- 1000 Watts CW
- 80MHz-1000MHz



Features

The Model 1000W1000E is a self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 1000W1000E, when used with an RF sweep generator, will provide a minimum of 1000 watts of RF power.

The Model 1000W1000E is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides operational presentation of Forward Power and Reflected Power plus amplifier status. Special features include a gain control, internal automatic level control (ALC) with front panel control of the ALC threshold, forward and reflective RF sample


ports for precise power measurements and RF output level protection. Protection is provided by DC current level sensing of all output stages.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format and RS-232 hardware and fiber optic, USB and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a single equipment rack, the 1000W1000E provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers. A safety interlock can be implemented via a rear panel connector.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

1000W1000E

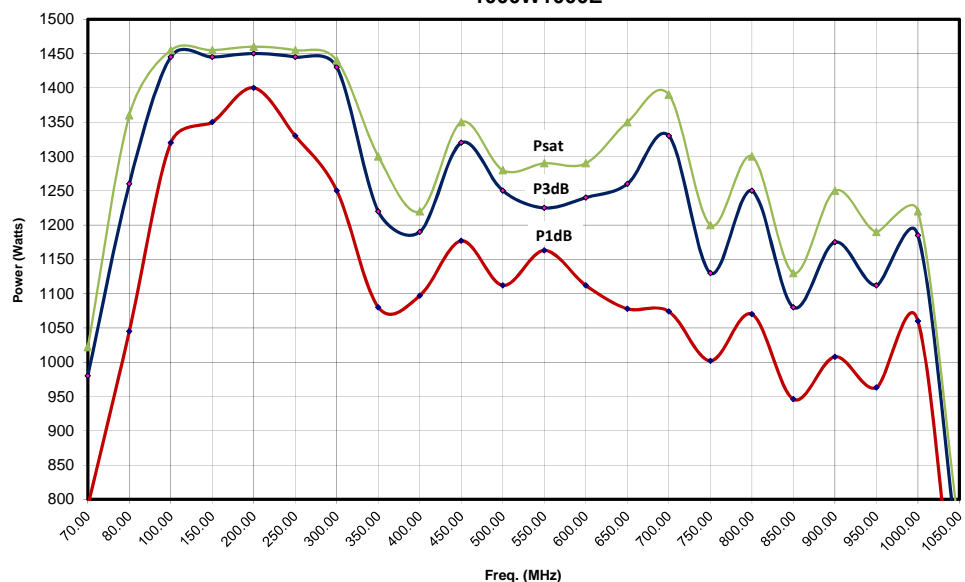

AR RF/Microwave
Instrumentation
160 School House Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us



1000W1000E

- 1000 Watts CW
- 80MHz–1000MHz

Specifications

RATED OUTPUT POWER: 1000 watts minimum
INPUT FOR RATED OUTPUT: 1.0 milliwatt maximum
POWER OUTPUT @ 3 dB compression:
 Nominal 1200 watts, 1100 watts min up to 500 MHz, 950 watts from 500 to 1000 MHz
POWER OUTPUT @ 1 dB compression:
 Nominal 950 watts, 950 watts min up to 500 MHz; 800 watts min from 500 to 1000 MHz
FLATNESS: ±1.5 dB maximum; ±1.0 dB typical
FREQUENCY RESPONSE: 80–1000 MHz instantaneously
GAIN (at maximum setting): 60 dB minimum
GAIN ADJUSTMENT (continuous range): 25 dB minimum
INPUT IMPEDANCE: 50 ohms, VSWR 1.5:1 maximum; 1.3:1 typical
OUTPUT IMPEDANCE: 50 ohms nominal
MISMATCH TOLERANCE: 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)
MODULATION CAPABILITY: Faithfully reproduces AM, FM, or Pulse modulation appearing on input signal.


HARMONIC DISTORTION: Minus 20 dBc maximum at 800 watts, -20 dBc typical @ 1000 watts
THIRD ORDER INTERCEPT POINT: 66 dBm typical
NOISE FIGURE: 8 dB maximum, 6 dB typical
PRIMARY POWER (specify voltage): 200-240 VAC, 50/60 Hz, single phase, 5000 watts
CONNECTORS
 RF Input: See Model Configurations
 RF Output: See Model Configurations
 Forward sample: BNC female, front (-63 dBc)
 Reverse sample: BNC female, front (-63 dBc)
 Remote Interfaces:
 IEEE-488 24-pin female
 RS-232 9-pin Subminiature D, female
 Fiber Optic ST Conn Tx and Rx RS-232
 USB 2.0 Type B
 Ethernet RJ-45
 Safety Interlock: 15-pin Subminiature D, rear panel

COOLING: Forced air (self contained fans), enters front and bottom
WEIGHT (approximate): 124.8 kg (275 lb)
SIZE (W x H x D): 50.3 x 127 x 61 cm (19.8 x 50 x 24 in)
EXPORT CLASSIFICATION: EAR99

Model Configurations

| Model | RF Input | RF Output |
|--------------|-----------------|-------------------|
| 1000W1000E | N female, front | 7/16 female, rear |
| 1000W1000EM1 | N female, rear | 7/16 female rear |

Graphs

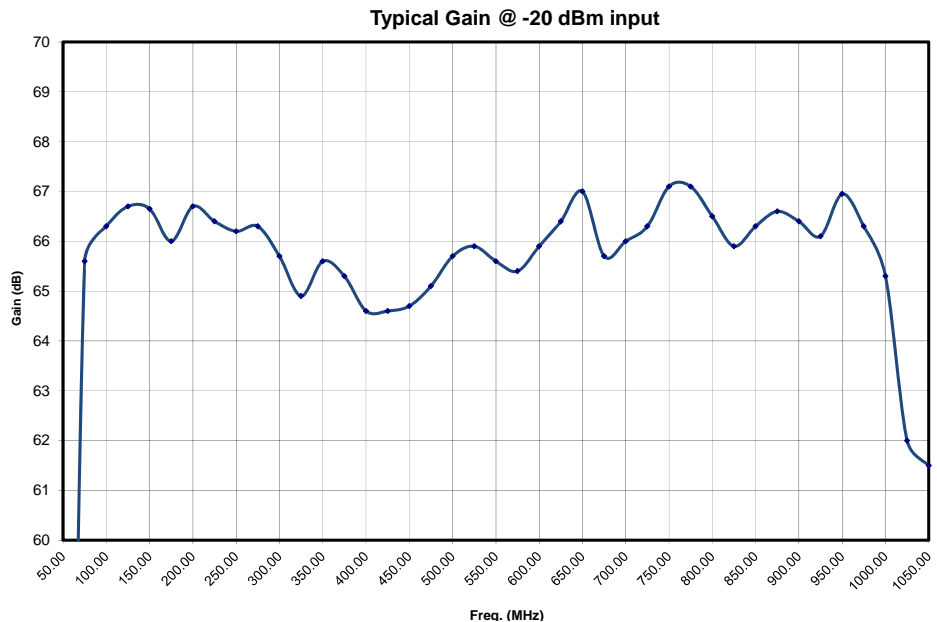

1000W1000E

- 1000 Watts CW
- 80MHz-1000MHz

