

Plug-In Low Noise Amplifier

TO-1724LN+ TO-1724LN

50Ω 1700 to 2400 MHz

Features

- very low noise, 1.6 dB max.
- wideband, 1700 to 2400 MHz
- hermetic, TO-8 can

Applications

- military, hi-rel applications
- PCS/DCS
- UMTS



CASE STYLE: QQ96
PRICE: \$203.50 ea. Qty. (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Low Noise Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		NOISE FIGURE (dB)	GAIN (dB)		MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (:1) Max.		DC POWER	
	f_L	f_U		Max.	Min.	Flatness Max.	Output (1 dB Compr.) Typ.		Input (no damage)	IP3 Typ.	In	Out
TO-1724LN(+)	1700	2400	1.6	20	±1.0	+10	+13	+22	2.5	2.5	15	70

Noise Figure specified at room temperature, increases to 1.6dB typical at +85°C

Open load is not recommended, potentially can cause damage.

With no load derate max power input power by 20 dB.

Pin Connections


RF IN	5
RF OUT	11
DC	2
GROUND	1,3,4,6,7,8,9,10,12
CASE GROUND	1,3,4,6,7,8,9,10,12

Maximum Ratings

Operating Temperature	-54°C to 85°C
Storage Temperature	-55°C to 100°C
DC Voltage	+17V Max.

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

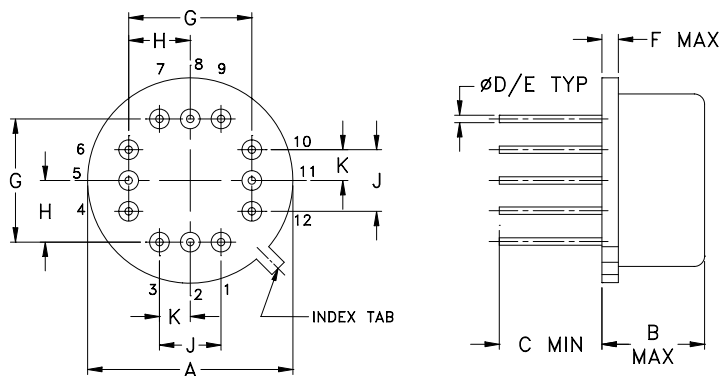

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.600	.250	.25	.016	.020	.04	.400	.200	.200	.100	grams
15.24	6.35	6.35	0.41	0.51	1.02	10.16	5.08	5.08	2.54	4.0

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp








www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M111178
TO-1724LN+
131015
Page 1 of 2

TO-1724LN+ TO-1724LN

Typical Performance Data/Curves

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	12V	15V	16V	12V	15V	16V	IN	OUT		
1700.00	22.01	22.71	22.91	13.10	12.90	14.40	1.49	1.85	1.35	12.75
1751.20	21.83	22.49	22.70	15.00	13.70	15.90	1.69	1.77	1.34	12.91
1821.90	21.75	22.42	22.58	14.80	12.50	14.70	1.74	1.78	1.37	12.97
1895.50	21.76	22.41	22.58	15.70	14.40	15.40	1.56	1.78	1.37	13.19
1969.20	21.64	22.24	22.38	16.00	15.00	18.30	1.89	1.73	1.36	13.53
2041.00	21.64	22.21	22.33	15.60	15.80	14.80	1.60	1.69	1.31	13.79
2130.80	22.16	22.61	22.69	12.50	15.90	15.90	1.52	1.66	1.21	14.18
2220.50	22.15	22.49	22.59	15.80	13.40	15.30	1.41	1.64	1.17	14.61
2310.30	22.77	23.08	23.07	15.40	14.70	16.30	1.15	1.55	1.23	15.02
2400.00	22.40	22.64	22.67	14.70	13.30	16.50	1.39	1.48	1.34	15.01

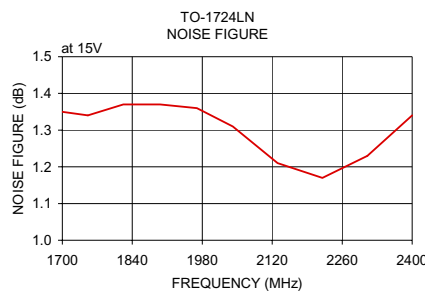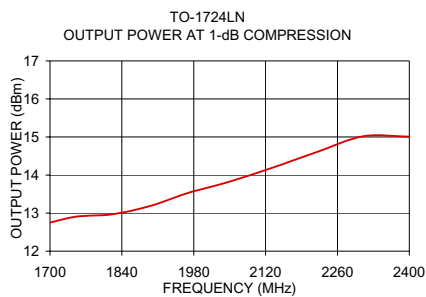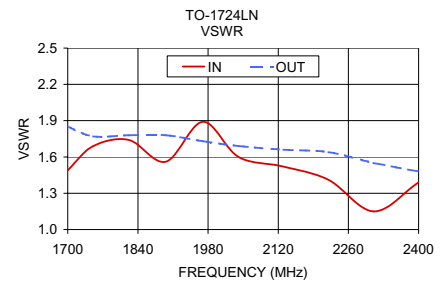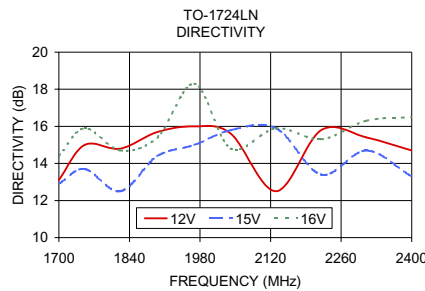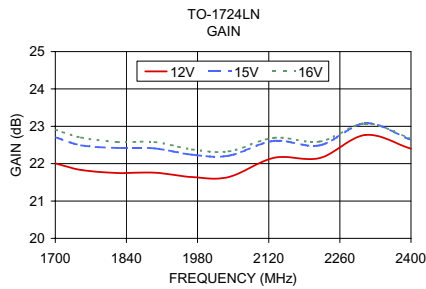

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

