



| REV. | DATE     | DESCRIPTION     |
|------|----------|-----------------|
| NC   | 06/10/03 | INITIAL RELEASE |



RECOMMENDED CABLE STRIPPING DIMENSIONS

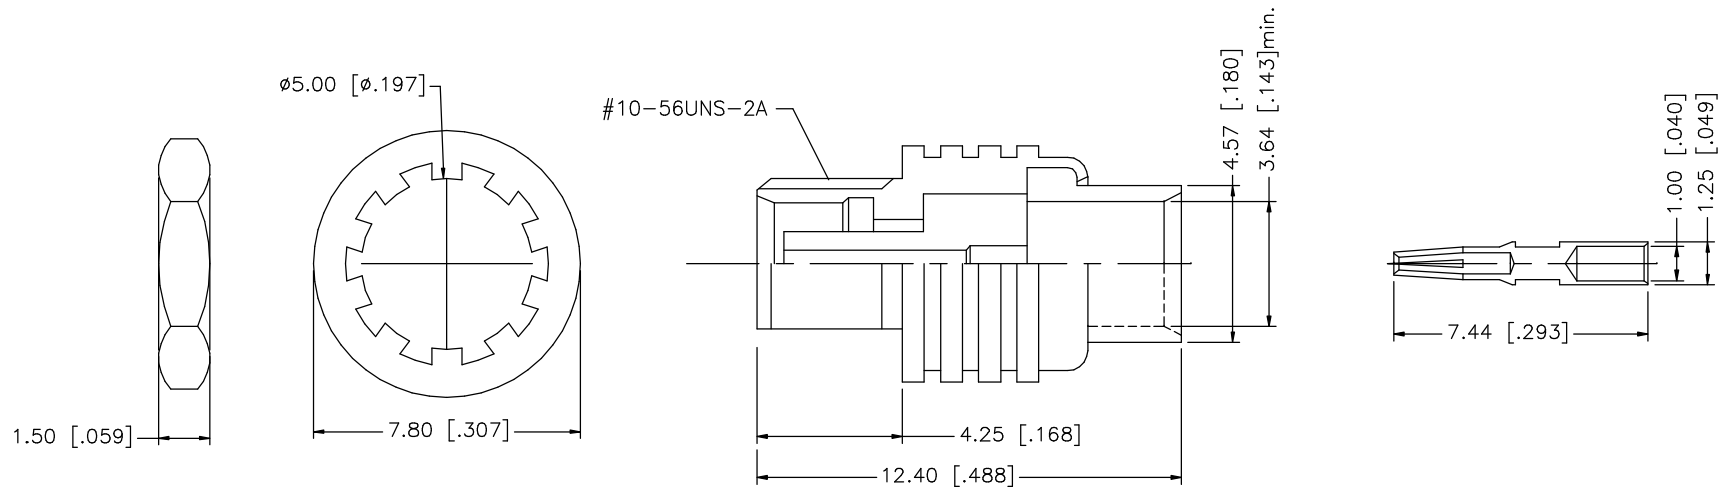

NOTE:

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS = 1.35mm

| REV. | DATE | DESCRIPTION | APPROVALS       | DATE              | <h1 style="color: blue;">Amphenol Connex</h1>  |
|------|------|-------------|-----------------|-------------------|--|
| 8    |      |             | DRAWN           | G.R.S.            |  |
| 7    |      |             | CHECKED         |                   | <b>PART DESCRIPTION</b><br>MCX BULKHEAD DIRECT SOLDER JACK<br>(.141" SEMI RIGID CABLE) |
| 6    |      |             | ISSUED          |                   |  |
| 5    |      |             | SHEET           | 1 OF 1            |  |
| 4    |      |             |                 |                   | <b>PART NO.</b>  |
| 3    |      |             |                 |                   | 252185   |
| 2    |      |             |                 |                   | <b>DWG. NO.</b>  |
| 1    |      |             |                 |                   | 252185.DWG   |
|      |      |             | <b>CAD FILE</b> | C:/252/252185.DWG | <b>REV.</b>  |
|      |      |             |                 |                   | NC   |
|      |      |             |                 |                   | <b>SIZE</b>  |
|      |      |             |                 |                   | A  |
|      |      |             |                 |                   | <b>SCALE</b>   |
|      |      |             |                 |                   | NA   |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.40mm  
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 = ± 0.007"  
 .315 - 1.180 = ± 0.015"  
 1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING