


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

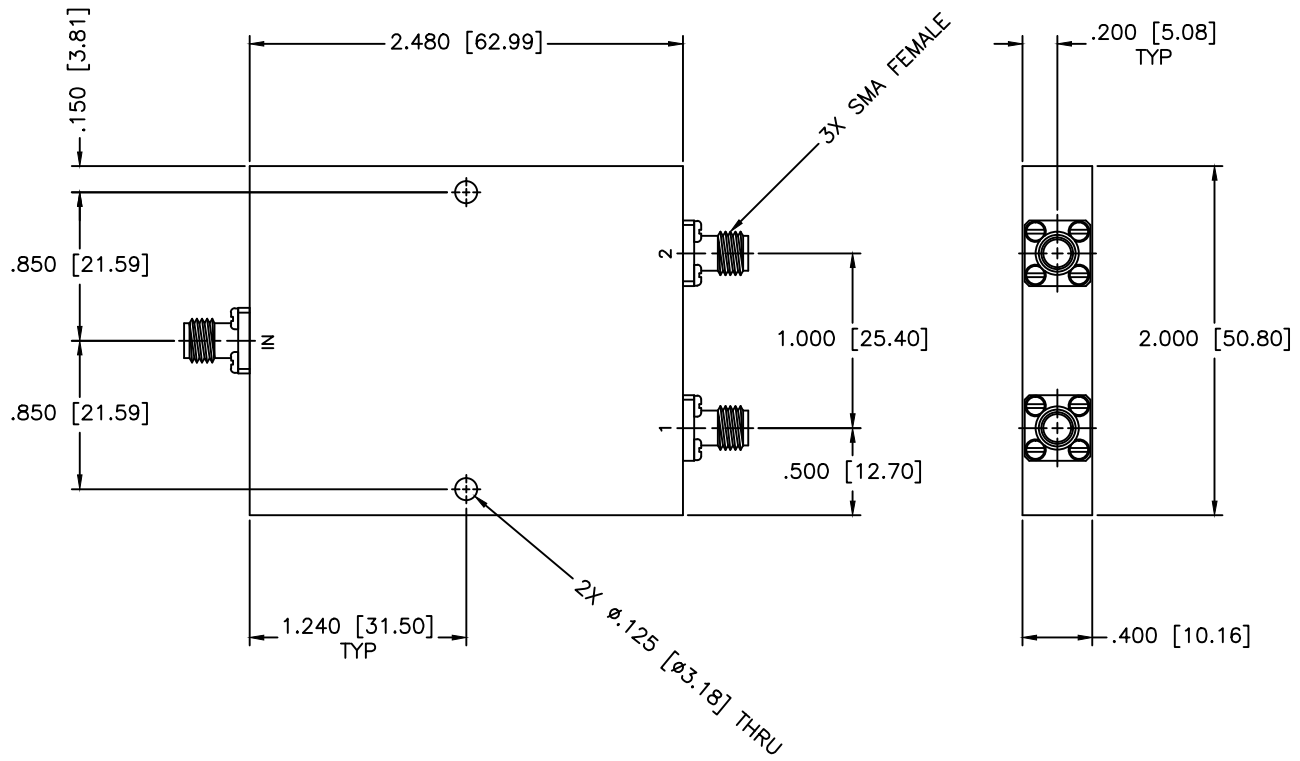

SPECIFICATIONS

Frequency Range: 0.5–3 GHz
 Isolation: 17dB Min.
 VSWR In/Out: 1.30:1/1.20:1 Max.
 Insertion Loss: 0.90dB Max.
 Amplitude Balance: ± 0.30 dB Max.
 Phase Balance: ± 2 Deg. Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY RF POWER DIVIDER	
DRAWN: Paiboon Luekhamhan DATE: 11-03-2009		PART NO.: PS2-169	
APPROVED: T. Nguyen DATE: 11-03-2009		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 84637
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 	
DO NOT SCALE THE DRAWING			