





0.7-1.0GHz Digital 6 Bits 360° Step Phase Shifter

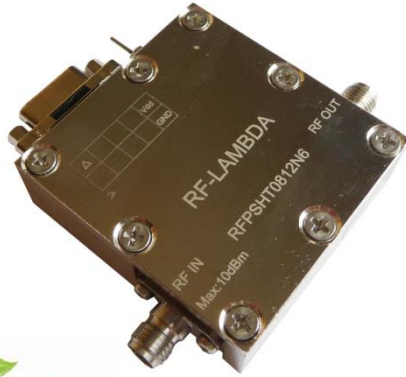

Features

- Wide Band Operation with full 0.7-1.0GHz bandwidth.
- High linearity up to 5W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Flat phase shifting response, low phase error.
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Parameter	Min.	Parameter	Max.	Units
Frequency Range	0.7	-	1.0	GHz
Insertion Loss	-	5.0	10.0	dB
Input VSWR	-	2.0	3.0	
Output VSWR	-	2.0	3.0	
Phase Error*	-	+/- 2.0	+25/-25.0	deg
RMS Phase Error	-	5.0		deg
Input Power for 1 dB Compression		23		dBm
Control Voltage	0	-	5	V
Bias Voltage Current (12V)		-	20	mA

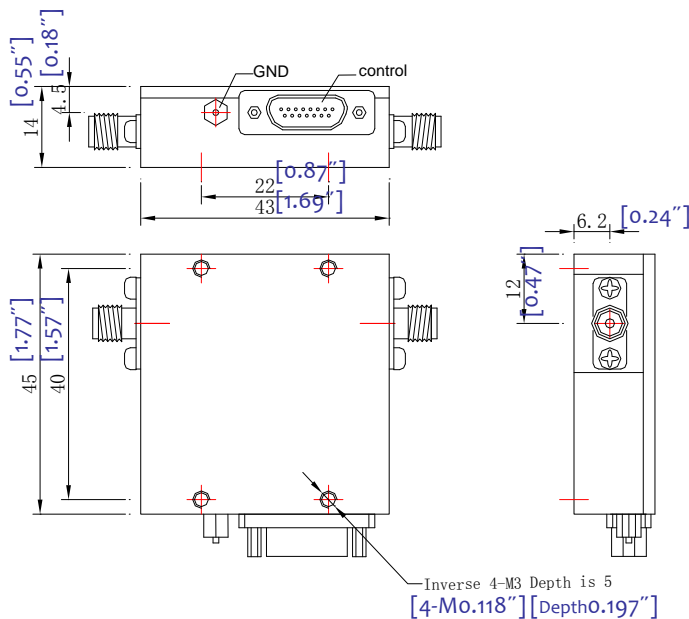

Control Voltage:

State	Voltage
Low(0)	0 to +0.5V
High(1)	+3 to +5V(Note 5)

Absolute Maximum Ratings:

Operating Temperature	-40° C to 85° C
Storage Temperature	-55° C to 100° C
(Vdd) Max!	15V
(Vc):	5.0 V
Input Power (RFI N) Max!	23 dBm







RF-LAMBDA

The power beyond expectations

RFPSHT0701D6

0.7-1.0GHz Full Band Digital Step 360° 6 Bits Phase Shifter

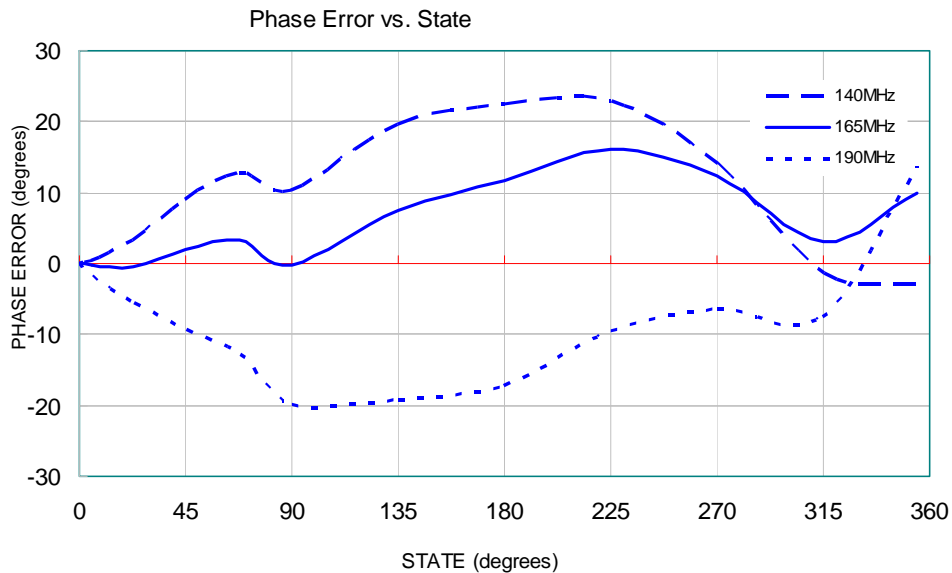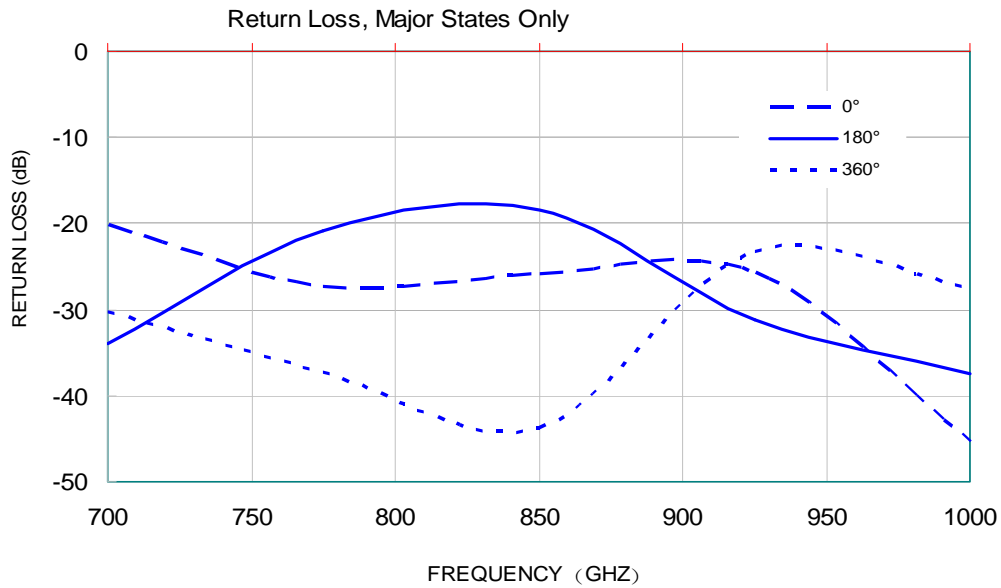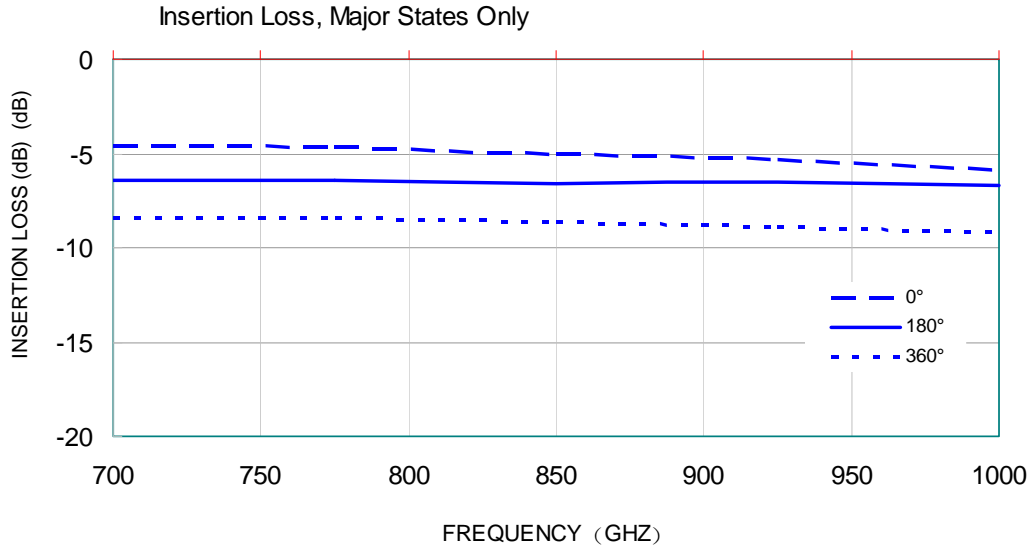

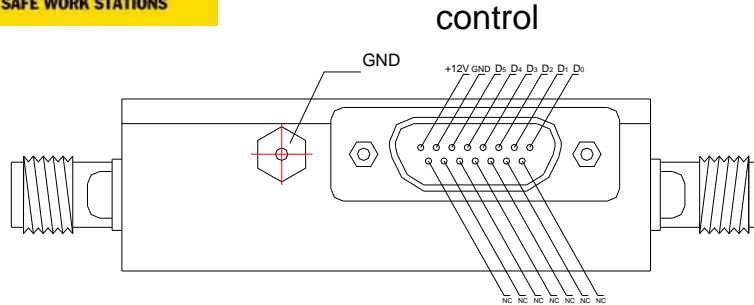

Control Voltage Input						Phase Shift (Degrees) RFIN - RFout
D5	D4	D3	D2	D1	D0	
1	1	1	1	1	1	Reference*
1	1	1	1	1	0	5.625
1	1	1	1	0	1	11.25
1	1	1	0	1	1	22.5
1	1	0	1	1	1	45.0
1	0	1	1	1	1	90.0
0	1	1	1	1	1	180.0
0	0	0	0	0	0	354.375

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

0.7-1.0GHz Full Band Digital Step 360° 6 Bits Phase Shifter