WAVEGUIDE TO COAXIAL ADAPTER --- RFWA137

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR137
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Aluminum, Brass, Alloyed Cuprum, Stainless
1.5	Coaxial Connector	SMA, N, TNC, 7/16 (Male or Female)
1.6	Internal Body Finish	Silver Plated chromate or conversion
1.7	External Body Finish	Body painted with gray/black epoxy enamel

3.0	Electrical Specifications	
3.1	Frequency Range	5.85 – 8.02GHz
3.2	Max. VSWR	1.20:1

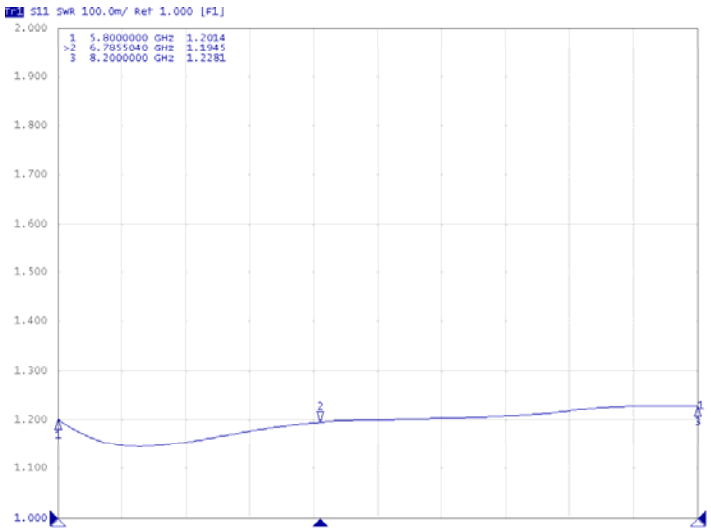

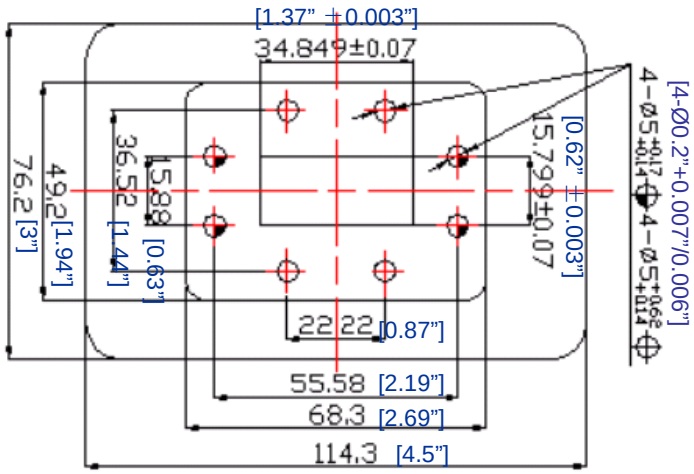

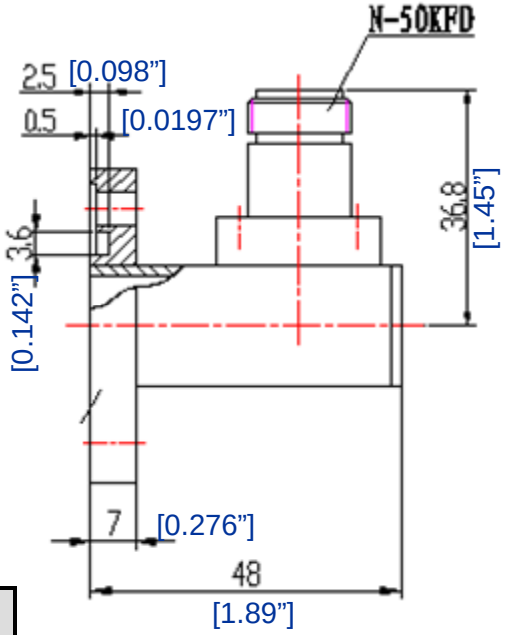

Part Number: RF W A 137 A o CF AL

- RF-Lambda
- Waveguide
- Adapter
- Waveguide Type Number
- **Connector Type:** **A**=SMA, **B**=N, **C**=TNC, **D**=7/16
- **Degree:** **9**=90° or **o**=0°
- **Flange Type:** **CG**=CPRG; **CF**=CPRF; **CO**=COVER; **CK**=CHOKE
- **Material:** **AL**=Aluminum; **BS**=Brass; **AC**=Alloyed Cuprum; **SS**=Stainless

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	30,000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	80% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1

DATE Sep 19th 2003

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRUTUBG BT RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY

DESIGN RFPC

RF-LAMBDA RFPC

RFWA137
WAVEGUIDE TO COAXIAL ADAPTER

CAD MODEL REVISION 05

ASSEMBLY REVISION VS12

ASSEMBLY NAME RFLVR45

DRAWING NUMBER D05-4

www.rflambda.com

RF-LAMBDA

SIZE LT

SHEETS 1 OF 1