



RF-LAMBDA

RWPSHT42D360

WR42 Waveguide Manual 360° Phase Shifter




Features

- Wide Band Operation, flat response
 - Frequency up to 110GHz upon request
 - High Power Handle Capability
 - Low Insertion Loss and High dynamic range
 - Temperature Range -40°C~+85°C
 - Customization available upon request

Applications: Phase shifters are devices used to adjust transmission phase in a system, are used to change the transmission phase angle (phase of S_{21}) of a network. RF-Lambda phase shifters provide low insertion loss, and equal amplitude (or loss) in all phase states. While the loss of a phase shifter is often overcome using an amplifier stage, the less loss, the less power that is needed to overcome it.

| Part Number | Waveguide Type | Low Freq (GHz) | Insertion Loss (dB) | Phase Range (degree) | VSWR (Max:1) | Power (Watts) |
|--------------|----------------|----------------|---------------------|----------------------|--------------|---------------|
| RWPSHT42D360 | WR42 | 18.0-26.5 | 0.2 | 360 | 1.2 | 300 |

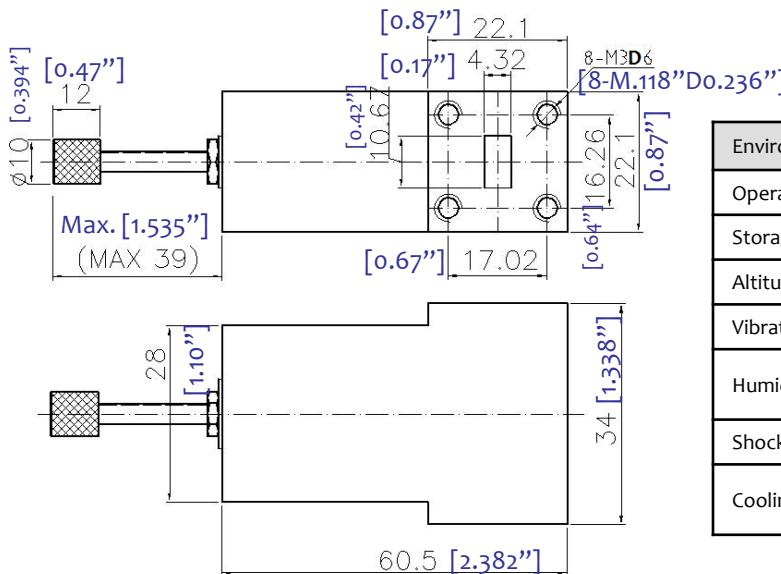

| Environment specifications | |
|----------------------------|--|
| Operation Temp. | -40°C~+85°C |
| Storage Temp. | -55°C~+125°C |
| Altitude | 42000 ft |
| Vibration | 10g rms (15 degree 2kHz) |
| Humidity | 100% RH at 35c, 95%RH at 40 deg c |
| Shock | 20G for 11msc |
| Cooling | FAN required for long time High power operation |



RF-LAMBDA

RWPSHT42D360

