


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	
A	REV PER ECN 5447	

LABEL WITH MODEL NO.
AND SERIAL NO.
THIS SURFACE

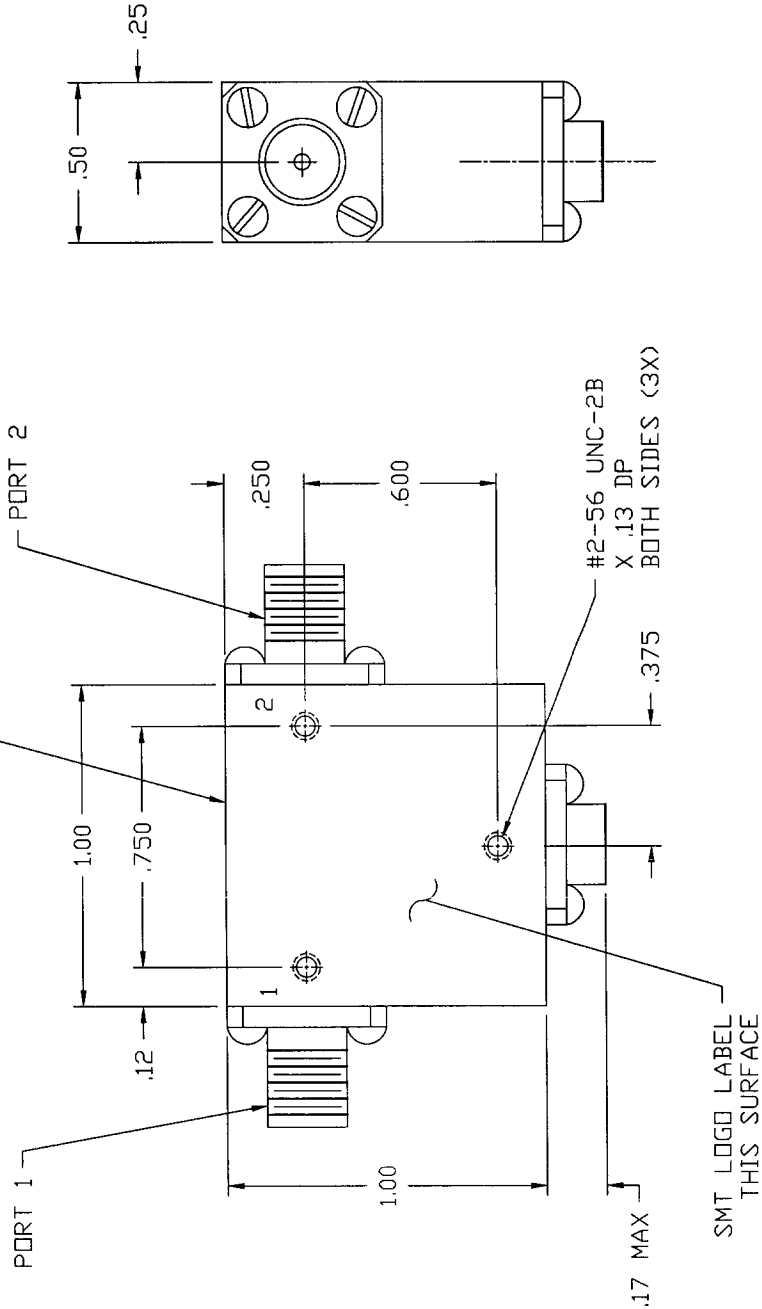

SPECIFICATIONS

1. FREQUENCY _____ 3.5 TO 7.0 GHz
2. ISOLATION _____ 18 dB MIN
3. INSERTION LOSS _____ 0.5 dB MAX
4. VSWR: _____ 1.30:1
5. TEMPERATURE:
OPERATING _____ -30° TO +70°C
STORAGE _____ -55° TO +100°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	TERMINATED
-1	SMA MALE	SMA FEMALE	TERMINATED
-2	SMA FEMALE	SMA MALE	TERMINATED
-3	SMA MALE	SMA MALE	TERMINATED

*** NOTE: PART DRAWN IS SMI3570, NO DASH NO. ***

QTY	FSCM	PART OR	PARTS LIST	
REQD	NO.	IDENTIFYING NO.	NOMENCLATURE	MATERIAL
			OR DESCRIPTION	SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES ± .XX± .02 ± XXX± .010		APPROVALS	DATE	
MATERIAL		DRAWN J. DARJES		
FINISH		CHECKED		
NEXT ASSY		ISSUED		
SMI3570-X				
USED ON				
APPLICATION				
		SIERRA MICROWAVE TECHNOLOGY		
		OUTLINE FOR SMI3570-X		
SIZE	FSCM NO.	DWG. NO.	REV.	
B	1CY63	205-0140-001		
SCALE			SHEET	