RFM products are now Murata products.

SF2238E

2560 MHz SAW Filter

- ***Low-loss RF SAW Filter***
- ***Surface-mount 3.0 x 3.0 x 1.3 mm Package***
- ***Complies with Directive 2002/95/EC (RoHS)***



SM3030-6

Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage on any Non-ground Terminal	3	V
Operating Temperature Range	-30 to +85	°C
Storage Temperature Range	-40 to +95	°C
Solder Reflow Temperature, 10 seconds, 5 cycles maximum	260	°C

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	F_C			2560		MHz
Maximum Insertion Loss, 2545 to 2575 MHz	IL			2.4	4.0	dB
Amplitude Ripple, 2545 to 2575MHz				0.8	2.0	dB_{P-P}
VSWR, 2545 to 2575 MHz				1.3:1	2.3:1	
Attenuation Referenced to 0 dB:						
DC to 1100 MHz			37	42.5		dB
1100 to 1880 MHz			31	42.5		
1880 to 2280 MHz			43	46		
2280 to 2420 MHz			40	43.5		
2420 to 2460 MHz			30	43		
2460 to 2490 MHz			10	23		
2635 to 2655 MHz			20	45		
2655 to 3100 MHz			41	45		
3100 to 4000 MHz			29	37		
Source Impedance	Z_S			50		Ω
Load Impedance	Z_L			50		

Case Style	SM3030-6 3.0 x 3.0 mm Nominal Footprint
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	972, YWWS
Standard Reel Quantity Reel Size 7 Inch	500 Pieces/Reel
Reel Size 13 Inch	3000 Pieces/Reel

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

©2010-2015 by Murata Electronics N.A., Inc.

Filter Response Plots

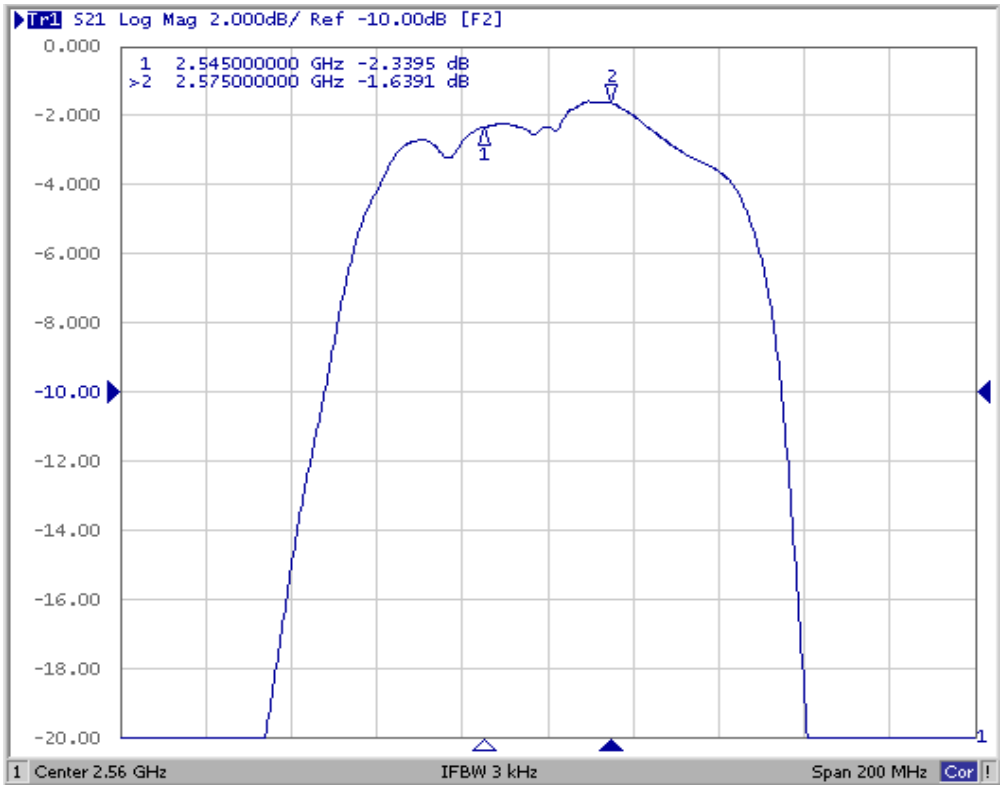

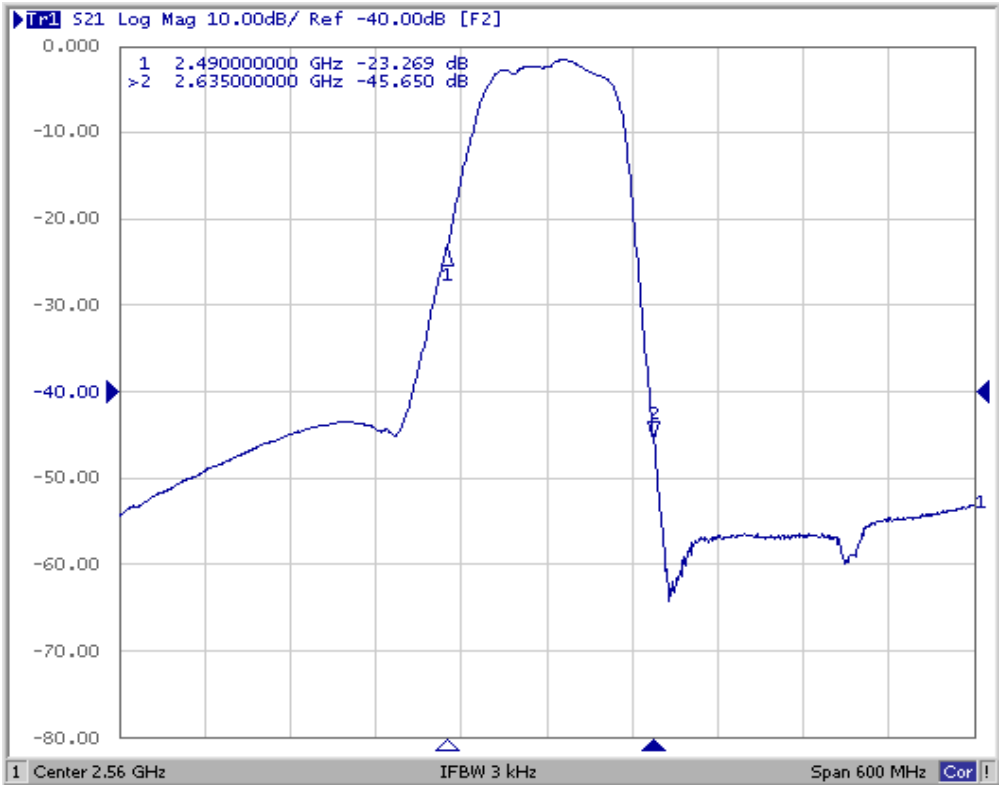

©2010-2015 by Murata Electronics N.A., Inc.

Input/Output VSWR Plots

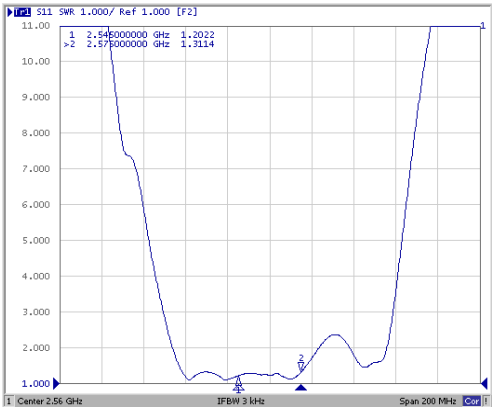

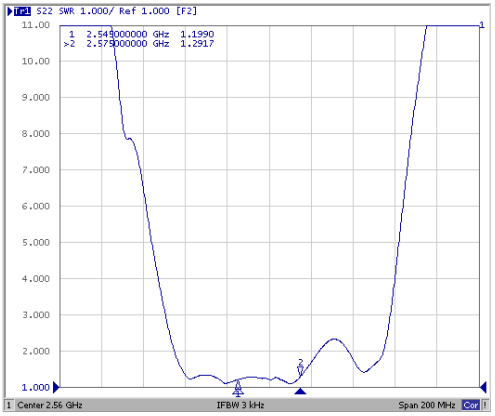

©2010-2015 by Murata Electronics N.A., Inc.

Filter Test Circuit

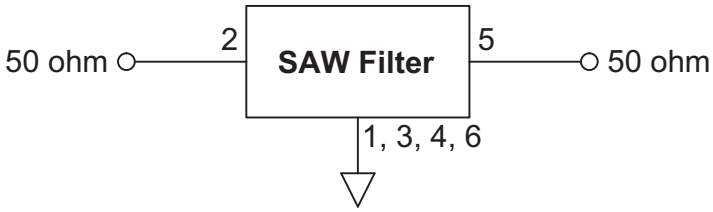

Connection	Terminals
Input	2
Output	5
Ground	All Others

©2010-2015 by Murata Electronics N.A., Inc.

SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case
3.0 X 3.0 mm Nominal Footprint





PCB Footprint Top View

Case and PCB Footprint Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.87	3.00	3.13	0.113	0.118	0.123
B	2.87	3.00	3.13	0.113	0.118	0.123
C	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.60	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
H	1.37	1.50	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056
K		3.20			0.126	
L		1.70			0.067	
M		1.05			0.041	
N		0.81			0.032	
O		0.38			0.015	

Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 µm Gold over 1.27 to 8.89 µm Nickel
Lid Plating	2.0 to 3.0 µm Nickel
Body	Al_2O_3 Ceramic
Pb Free	

TOP VIEW

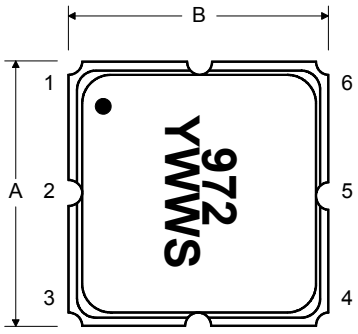

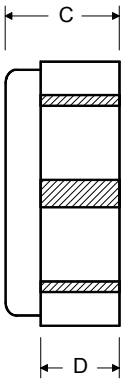

BOTTOM VIEW

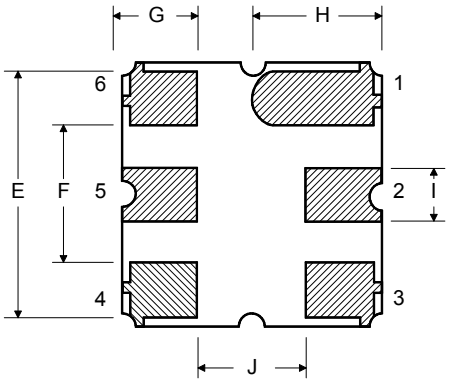



©2010-2015 by Murata Electronics N.A., Inc.

Tape and Reel Specifications

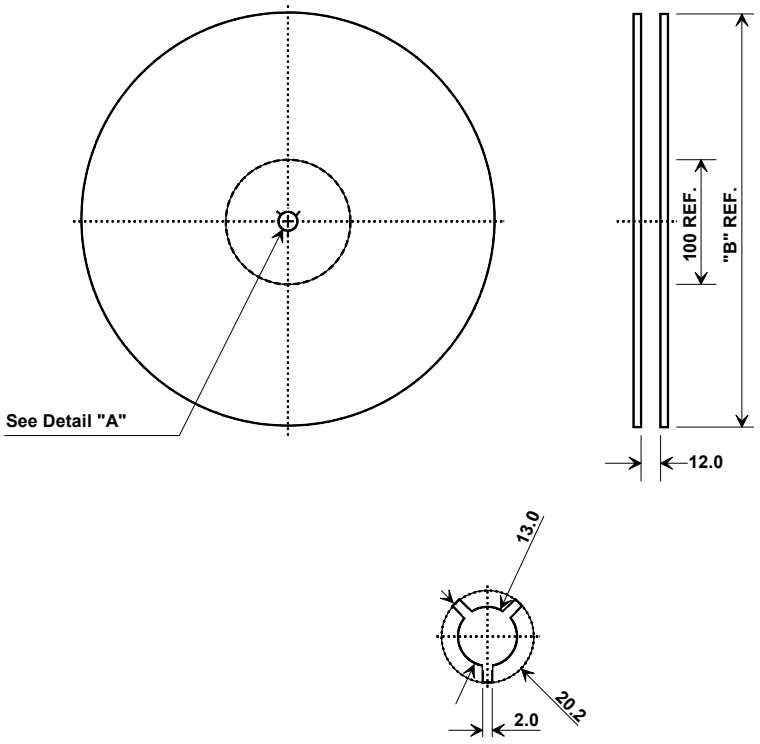

"B"		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000

COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	3.35 mm
Bo	3.35 mm
Ko	1.40 mm
Pitch	8.0 mm
W	12.0 mm

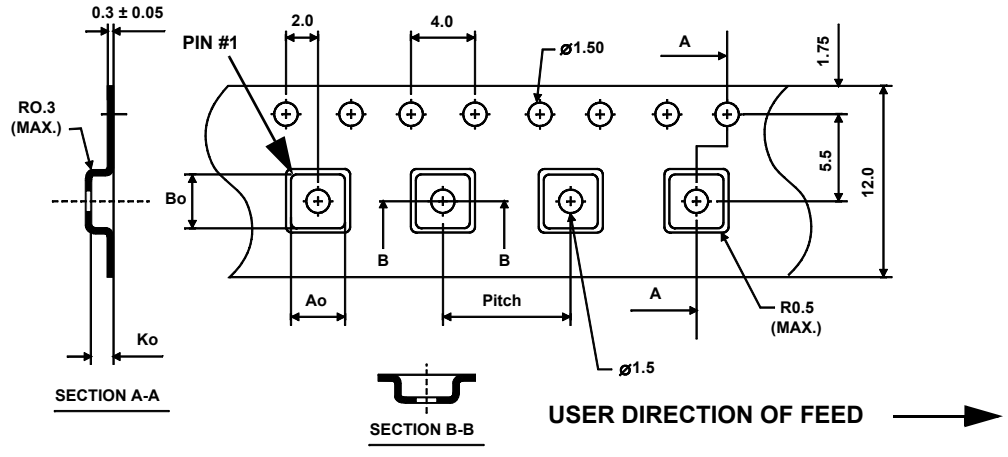

©2010-2015 by Murata Electronics N.A., Inc.