

# KR Electronics, Inc.

## General Description


KR Electronics part number 3018-2+ is a 30 MHz lowpass filter. The filter has group delay and amplitude equalization and attains over 50 dB by 37.5 MHz. Other frequencies are available. Please consult the factory.

### Features

- 30 MHz Lowpass Filter
- Group Delay Equalized
- Elliptic Type—Sharp Transition
- 50 dB min Attenuation by 37.5 MHz
- 50  $\Omega$  Source and Load
- Surface Mount
- Also available with SMA Connectors

## Typical Performance

**Overall Response**  
(10 dB/div)

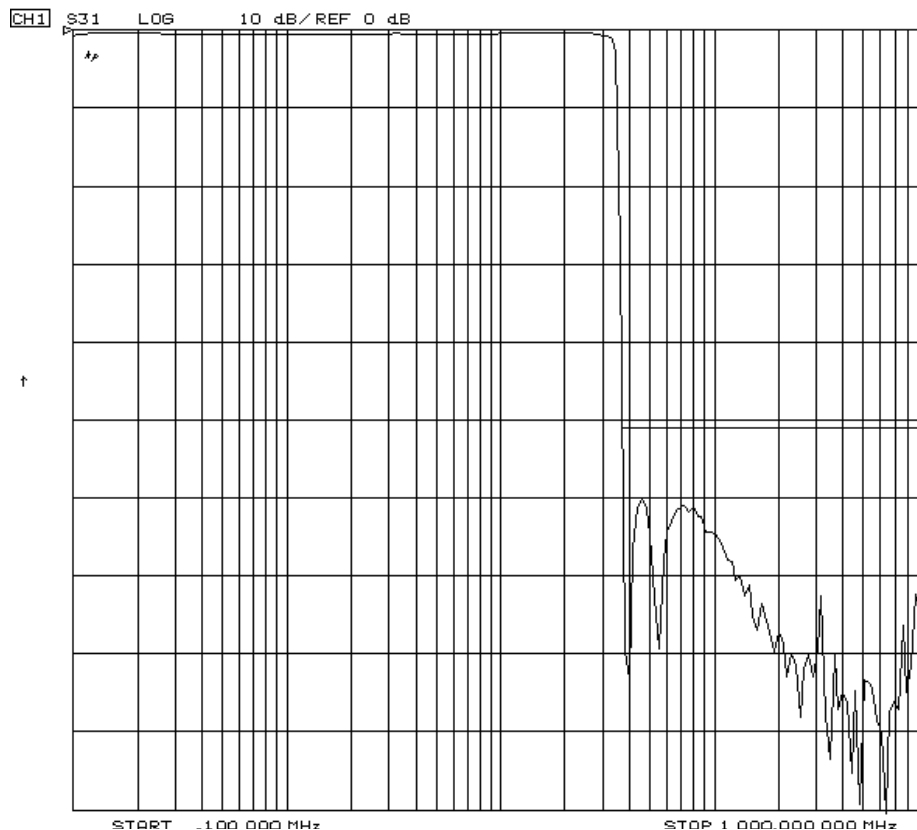


KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div & 20 nsec/div)

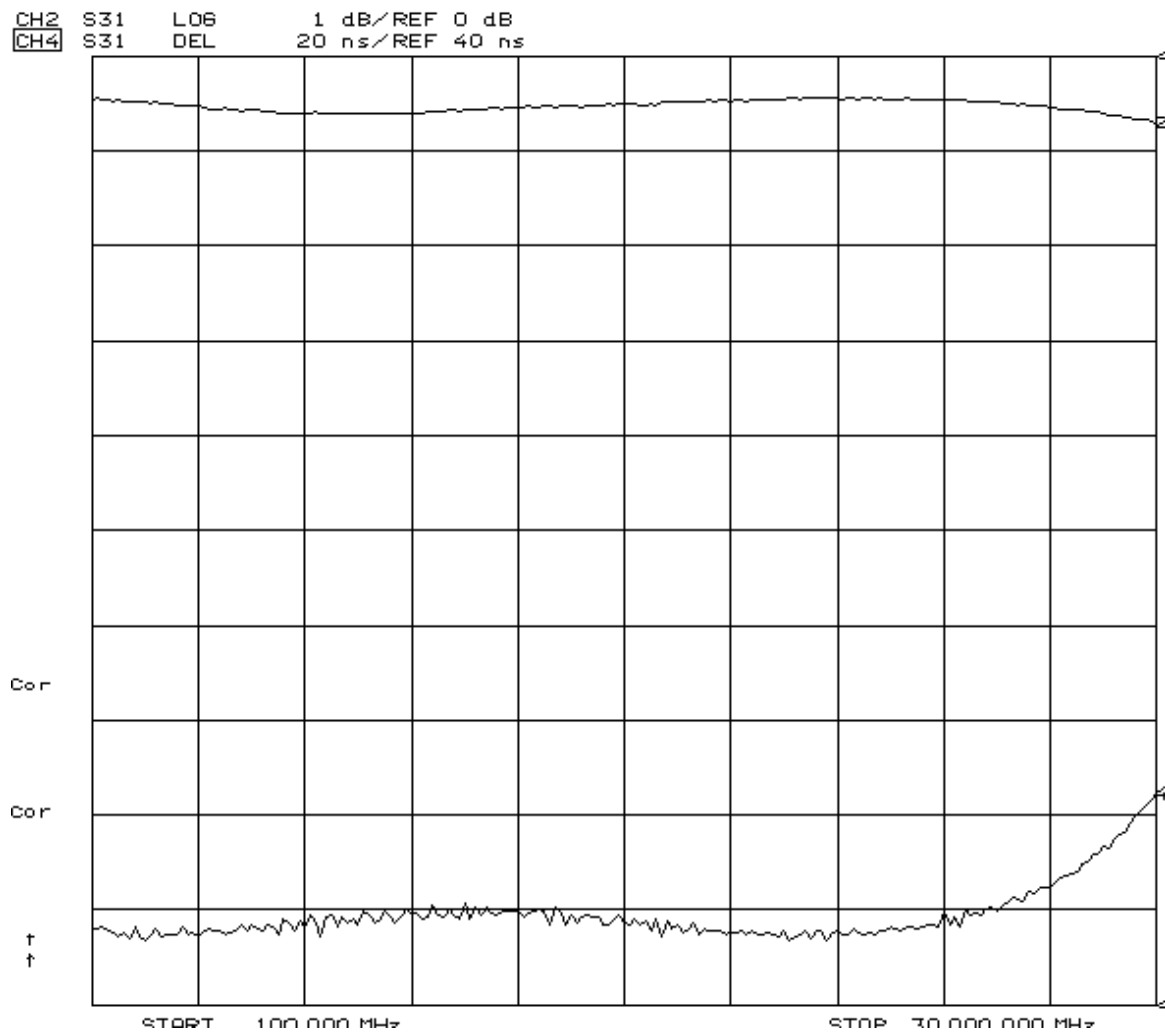


# KR Electronics 3018-2+

## Specifications

Parameter	Specification
Filter type	Lowpass
Passband Ripple to 30 MHz	1 dB max
Rejection at 37.5 MHz	50 dB min 60 dB typical
Source and Load	50 $\Omega$
RoHS	Yes

## Physical Dimensions

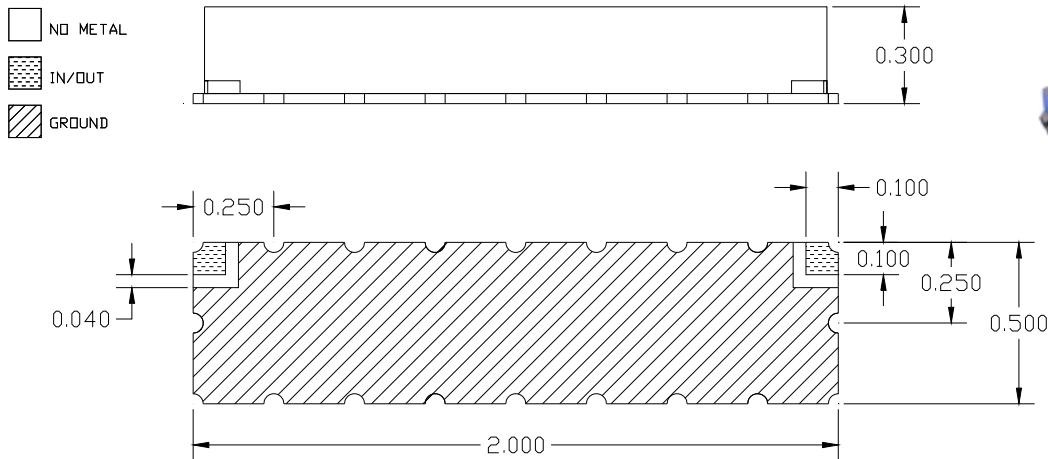

### Notes:

1. Surface mount package
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web: www.krfilters.com  
Email: sales@krfilters.com  
Phone: (732) 636-1900  
Fax: (732) 636-1982