
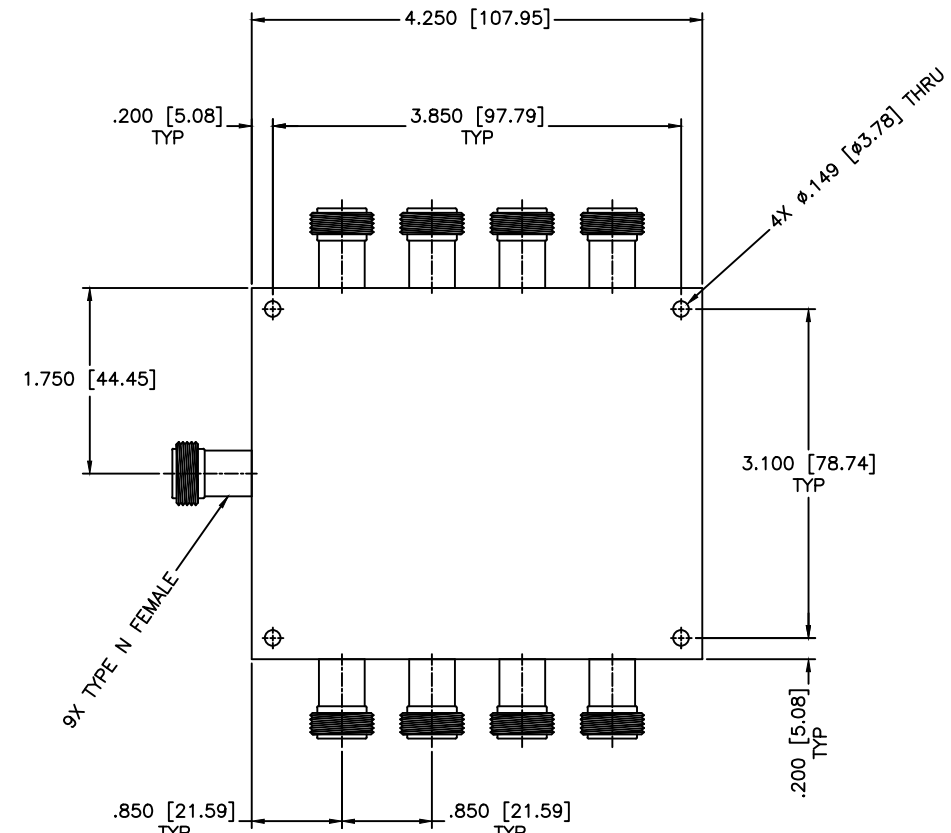


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

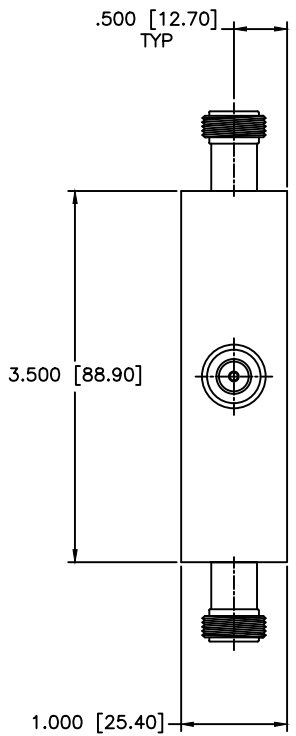

SPECIFICATIONS

Frequency Range: 50–500 MHz
 Isolation: 25dB Min.
 VSWR: 1.35:1 Max.
 Insertion Loss: 1.9dB Max.
 Amplitude Balance: ± 0.5 dB Max.
 Phase Balance: ± 4 Deg. Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://www.mcli.com		SCALE: N/A
DRAWING TITLE:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY LUMPED ELEMENT POWER DIVIDER		SHEET: N/A
DRAWN: Poiboon Luengkhamhan		DATE: 11-05-1997		PART NO. PL8-5/NF		
APPROVED: T. Nguyen		DATE: 11-05-1997		CAGE CODE: OD2L5		DWG NO. 80236
				SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		