2X Fundamental

Voltage Controlled Oscillator

ROS-5490C-119+

Frequency Doubling 5340 to 5490 MHz

CASE STYLE: CK1113
PRICE: $ 29.95 ea. QTY (5-49)

Features

- frequency based on multiplication of carrier frequency
- low phase noise
- low pushing
- low pulling
- 5V tuning voltage range
- aqueous washable

Applications

- point-to-point system
- wireless communications

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz) F 2X(1/2F)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc) Max.			PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
								VOLTAGE RANGE (V)		SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)							Vcc (volts)	Current (mA)
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	F0.5	F1.5	F2	Typ.	Typ.		Max.
ROS-5490C-119+	5340	5490	+0.5	-74	-102	-122	-142	0.5	5	58-76	15	150	-90	-15	-15	-15	0.5	1.5	5	35

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

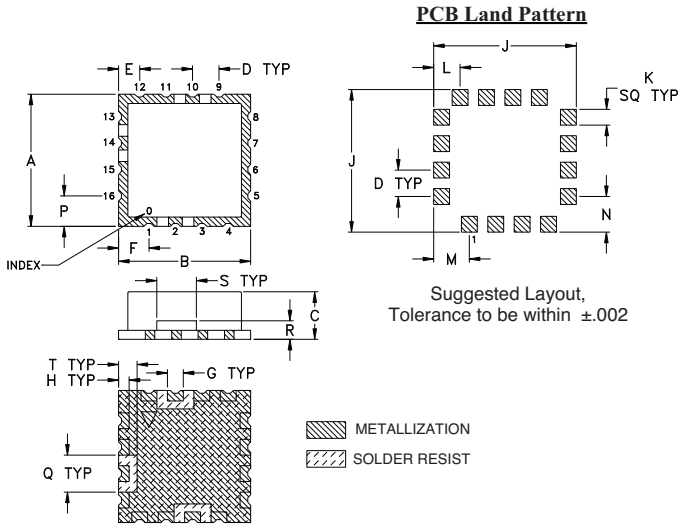

Demo Board MCL P/N: TB-10
Suggested PCB Layout (PL-012)

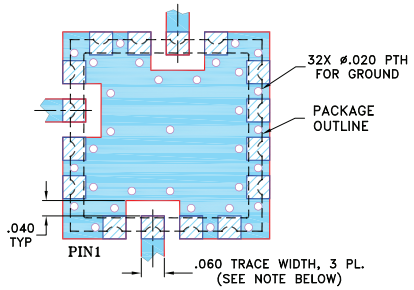

NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.220	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	5.59	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.2

REV. OR
M110769
EDR-8049F1
ROS-5490C-119+
RAV
121004

Performance Data & Curves*

ROS-5490C-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 5415 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F0.5	F1.5	F2			1kHz	10kHz	100kHz	1MHz		
0.00	63.57	5262.5	5247.8	5237.0	2.71	-0.25	-1.87	25.96	-28.0	-43.5	-26.6	0.92	0.37	-76.2	-102.9	-123.9	-141.3	1.0	-74.20
0.25	60.06	5277.8	5263.7	5253.5	2.54	0.01	-1.77	26.02	-27.3	-46.2	-26.1	1.04	0.70	-75.5	-103.2	-124.3	-141.4	2.0	-84.01
0.50	58.74	5292.6	5278.7	5268.7	2.26	-0.15	-1.55	26.05	-27.4	-40.9	-26.5	1.12	0.72	-74.2	-103.5	-124.4	-142.4	3.5	-90.49
0.75	58.26	5307.2	5293.4	5283.4	2.32	-0.44	-1.54	26.09	-27.6	-37.9	-26.2	1.18	0.45	-75.6	-102.2	-124.4	-142.5	6.0	-98.31
1.00	58.21	5321.7	5307.9	5297.8	2.54	-0.43	-1.70	26.12	-27.6	-38.7	-26.6	1.23	0.09	-74.5	-103.5	-124.2	-142.0	8.5	-101.20
1.25	58.45	5336.2	5322.5	5312.3	2.70	-0.19	-1.85	26.15	-27.3	-38.6	-26.2	1.28	0.37	-76.5	-102.7	-124.6	-141.7	10.0	-102.96
1.50	59.18	5350.8	5337.1	5326.9	2.88	0.01	-1.70	26.20	-26.9	-36.3	-26.2	1.31	0.66	-74.7	-102.7	-123.7	-141.9	20.8	-109.39
1.75	60.54	5365.7	5351.9	5341.6	2.88	0.14	-1.41	26.23	-26.7	-34.7	-26.3	1.34	0.73	-75.0	-103.2	-124.7	-143.1	35.5	-112.94
2.00	62.40	5381.1	5367.0	5356.5	2.51	0.18	-1.13	26.27	-26.5	-34.9	-26.3	1.37	0.60	-74.8	-102.3	-122.9	-142.4	60.7	-115.54
2.25	64.45	5397.0	5382.6	5371.8	2.48	-0.01	-0.95	26.29	-26.1	-34.0	-25.9	1.42	0.20	-73.3	-103.1	-124.0	-141.4	86.7	-120.28
2.50	66.55	5413.4	5398.7	5387.6	2.59	-0.22	-1.21	26.33	-26.3	-33.3	-27.0	1.48	0.29	-74.3	-102.1	-123.6	-141.5	100.0	-121.57
2.75	68.27	5430.2	5415.4	5403.9	2.94	-0.02	-1.53	26.36	-26.6	-32.5	-26.6	1.53	0.65	-74.1	-102.7	-122.0	-143.4	148.1	-125.36
3.00	70.07	5447.5	5432.4	5420.8	2.83	0.20	-1.35	26.40	-26.6	-32.6	-26.8	1.54	0.67	-75.3	-102.1	-123.5	-141.7	177.0	-127.78
3.25	72.30	5465.4	5450.0	5438.1	3.23	0.28	-0.92	26.44	-26.5	-32.2	-26.9	1.53	0.25	-73.7	-101.9	-122.9	-142.9	211.6	-128.79
3.50	73.93	5483.7	5468.0	5455.8	3.14	0.42	-0.68	26.47	-26.0	-31.5	-24.8	1.46	0.21	-74.1	-101.3	-122.2	-142.0	302.4	-131.92
3.75	74.49	5502.4	5486.5	5474.1	2.94	0.35	-0.93	26.51	-25.7	-31.3	-25.6	1.31	0.58	-73.9	-101.1	-122.3	-142.8	361.5	-134.36
4.00	74.34	5521.1	5505.1	5492.6	2.91	0.21	-0.82	26.54	-26.3	-31.5	-26.4	1.02	0.64	-73.7	-100.9	-122.5	-141.3	507.5	-138.28
4.25	73.00	5539.6	5523.7	5511.1	3.42	0.12	-0.80	26.58	-26.7	-32.6	-25.2	0.64	0.42	-72.2	-100.1	-121.5	-141.2	606.7	-139.40
4.50	71.14	5557.8	5542.0	5529.5	3.35	0.51	-0.95	26.61	-26.7	-33.3	-26.7	0.21	0.13	-71.9	-99.3	-120.9	-140.6	851.6	-141.57
5.00	65.87	5592.6	5576.9	5564.5	2.92	0.20	-0.47	26.67	-25.4	-32.5	-25.5	0.50	0.62	-70.2	-99.1	-120.4	-140.1	1000.0	-142.95

*at 25°C unless mentioned otherwise

ROS-5490C-119+
Frequency and Tuning Sensitivity

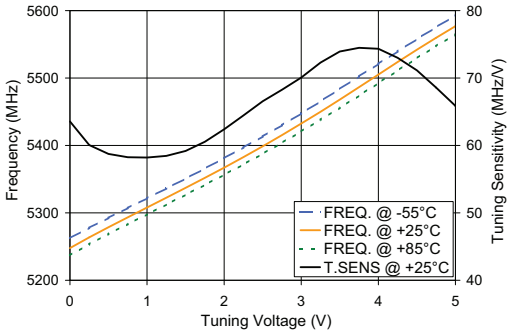

ROS-5490C-119+
Power Output

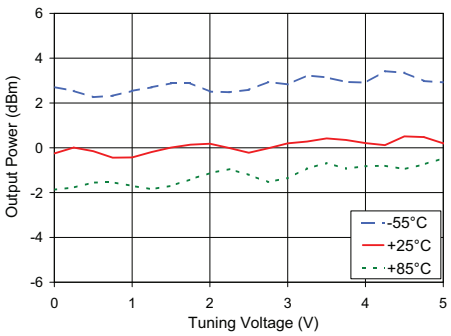

ROS-5490C-119+
Harmonics Level

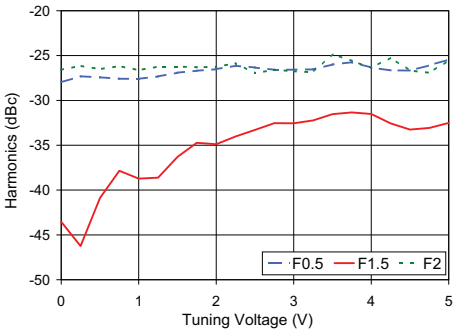

ROS-5490C-119+
Frequency Pulling & Pushing (Vcc ± 5%)

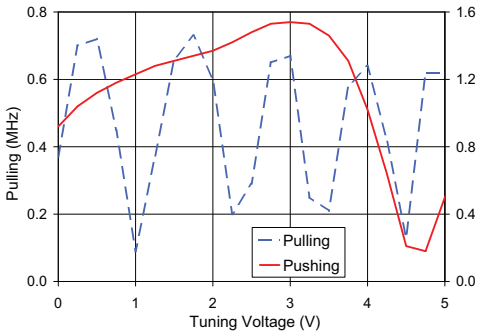

ROS-5490C-119+
Phase Noise Vs. Tuning Voltage

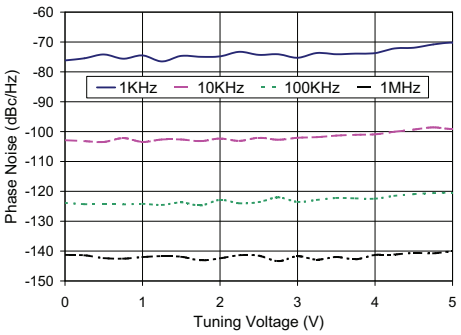

ROS-5490C-119+
Phase Noise