




# RF-LAMBDA

The power beyond expectations

## MANUAL CONTROL STEP ATTENUATOR (DC-1GHZ 10DB RANGE)

### Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- High power handle up to 100W CW upon request
- Custom Configurations Available Upon Request.

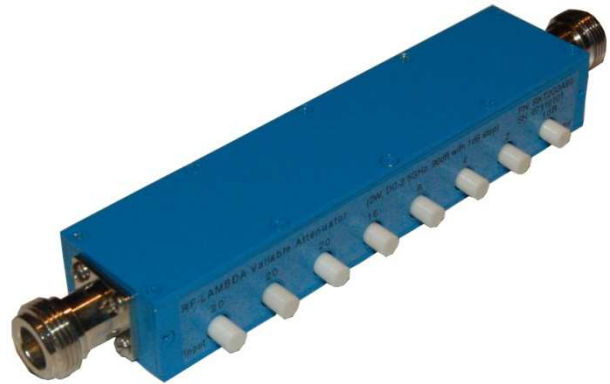

### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.


| Part Number | Frequency | Power (Watts) | Attenuation Range (dB) | Attenuation Step (dB) | VSWR max. | Insertion Loss (dB) | Accuracy (dB) |
|-------------|-----------|---------------|------------------------|-----------------------|-----------|---------------------|---------------|
| RKT5G1A10   | DC-1GHz   | 5             | 10                     | 0.1                   | 1.30      | <1.6                | ± 0.3         |

Connector: F type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

PN: **RKT 5 G X X 10**

Manual Control Attenuator    Power Handle In Watt    Freq Unit GHz    Freq Number    Product Type    Attenuation Range

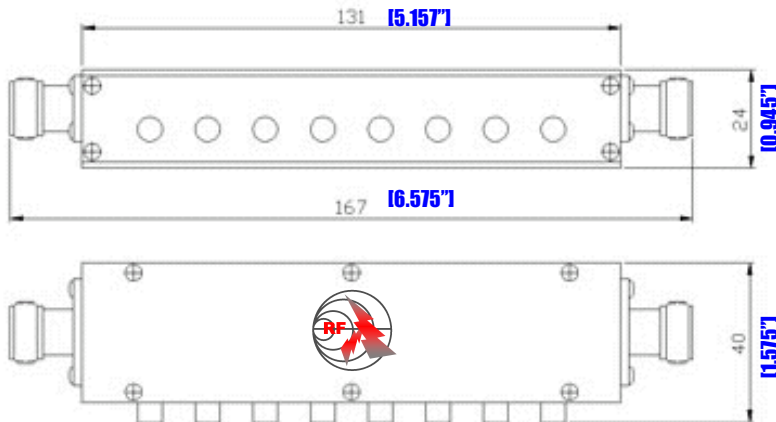

MANUAL CONTROL STEP ATTENUATOR

(DC-1GHZ 10DB RANGE)