

**OUTPUT**

**Frequency**

840 MHz

**Level**

+13 dBm ±2 dB into 50 ohms

**STABILITY**

**Aging**

1 x 10<sup>-6</sup> first year  
 after 30 days operating, typical  
 5 x 10<sup>-7</sup> second year, typical  
 3 x 10<sup>-7</sup> per year thereafter, typical

**Phase Noise L(f), typical**

100 Hz -102 dBc/Hz  
 1 KHz -132 dBc/Hz  
 10 KHz -155 dBc/Hz  
 100 KHz -156 dBc/Hz

**Temperature Stability**

±5 x 10<sup>-7</sup>, 0° to +50°C (Ref +25°C)

**Harmonics**

≤ -25 dBc

**Sub-Harmonics**

≤ -60 dBc

**Spurious**

≤ -80 dBc, excluding power supply line related spurs

**MECHANICAL**

**Dimensions**

2.25 x 4 x 1"

**Connectors**

SMA(f) and solder pins

**Packaging**

Nickel-plated machined aluminum housing – J1

**Mounting**

Threaded inserts on base, #2-56, 6 places

**POWER REQUIREMENTS**

**Warm-Up Power**

≤ 8.5 Watts for 5 minutes

**Total Power**

≤ 5.0 Watts at +25°C

**Supply Voltage**

+15 VDC ±5%

**ADJUSTMENT**

**Mechanical Tuning**

±4 x 10<sup>-6</sup>

**Electrical Tuning**

±5 x 10<sup>-7</sup>, ±5 VDC

Negative slope

**CRYSTAL**

**Type**

120 MHz SC-cut (x7)

**OTHER**

**Label**


Use conventional label with the following information:  
 501-25463 (Current Rev.)  
 840 MHz MXO-FR  
 +15 VDC  
 Serial # - Date Code  
 (Mark connectors with function)

**Test Data**

Output Level  
 Phase Noise  
 Temperature Stability  
 Harmonics, Subs, Spurious  
 Power – Warm-up and Total  
 Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	01-25-12	Initial Release	PAC	

J1 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output

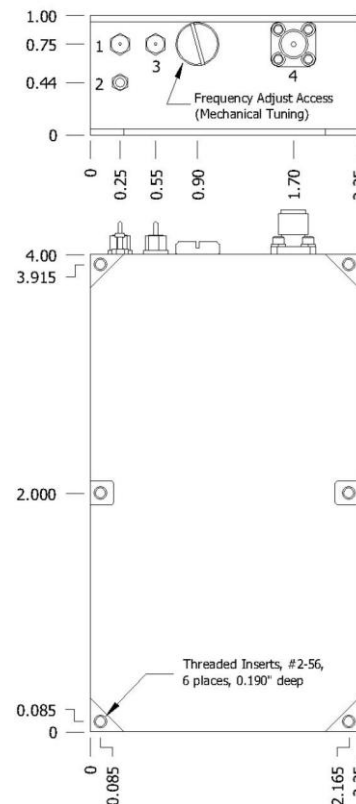

**Wenzel Associates, Inc.**  
 Austin, Texas

Title:  
**840 MHz Multiplied Crystal Oscillator (MXO-FR)**

P/N: <b>501-25463</b>	Rev: <b>-</b>	Date: <b>01-25-12</b>	Drawn:	Ref:
--------------------------	------------------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: <b>±0.030"</b>	0.XXX Dec: <b>±0.010"</b>	FSCM: <b>62821</b>	Page 1 of 1
--	-----------------------------	------------------------------	-----------------------	-------------