


Key Features:

- Center frequency range: 800~2000MHz
- Dual junction for high reverse isolation
- 50 ohm SMA female connectors, Type N female connectors optional
- Power handling >+50Watts CW, 1000 Watt Pulse, Reverse 10 Watt Terminations
- Operating temperature -20~+65°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Isolation, dB,	VSWR	Forawrd Power, Watts, CW/Pulse	Termination	Temp. Range, °C
F2450-0088-18	0.80~0.96	0.8 Max	40 min	≤1.25	≥50/1000	10	-20 ~ +65
F2450-0100-20	0.9~1.1	0.8 Max	40 min	≤1.25	≥50/1000	10	-20 ~ +65
F2450-0165-18	1.5~1.8	0.8 Max	40 min	≤1.25	≥50/1000	10	-20 ~ +65
F2450-0185-16	1.7~2.0	0.8 Max	40 min	≤1.25	≥50/1000	10	-20 ~ +65

Mechanical Structure:

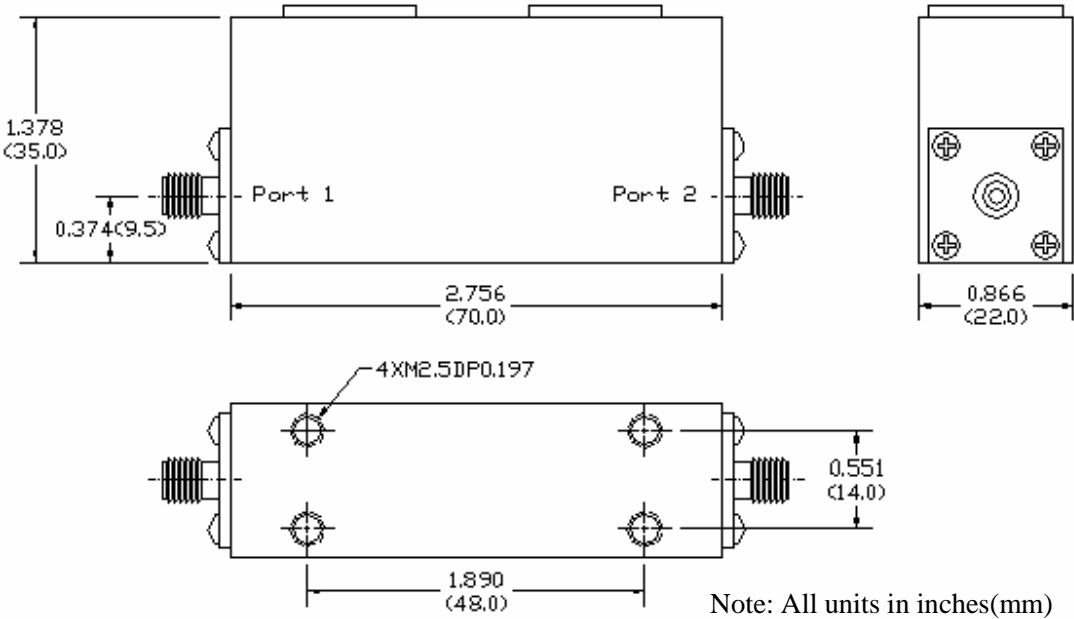

Ordering Information:

