RF Transformer

 50Ω

40 to 300 MHz

TX16-R3T+



CASE STYLE: TT240 PRICE: \$4.50 ea. QTY (25-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-20°C to 85°C			
Storage Temperature	-55°C to 100°C			
RF Power	250mW			
DC Current	30mA			
Permanent damage may occur if any of these limits are exceeded				

Pin Connections


PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5

Outline Drawing



Outline Dimensions (inch)

F	Ε	D	С	В	Α
.055	.050	.100	.20	.31	.250
1.40	1.27	2.54	5.08	7.87	6.35
wt		K	J	Н	G
grams		.050	.270	.070	.040
0.50		1.27	6.86	1.78	1.02



Features

- wideband, 40 to 300 MHz
- high impedance ratio 16:1
- leadless surface mount

Applications

- impedance matching of amplifiers
- push-pull amplifiers
- VHF/UHF receivers/transmitters


Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	3 dB MHz	INSERTION LOSS* 2 dB MHz	1 dB MHz
16	40-300	40-300	60-220	70-150

^{*} Insertion Loss is referenced to mid-band loss, 0.8 dB tvp.

Typical Performance Data

FREQU (MH		S R. LOSS	3
40.0 45.0 60.0 65.0	00 0.81 00 0.91	12.21 15.24	
70.0	0.96	16.23	
110.0 150.0 185.0 220.0	00 1.44 00 1.58 00 2.00	9.60 7.74 6.29	
300.0	2.74	4.30	

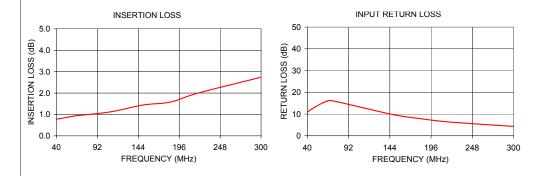

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp