


1 2 3 4 5 6

No.	Revision	Date	Name
△			
△			

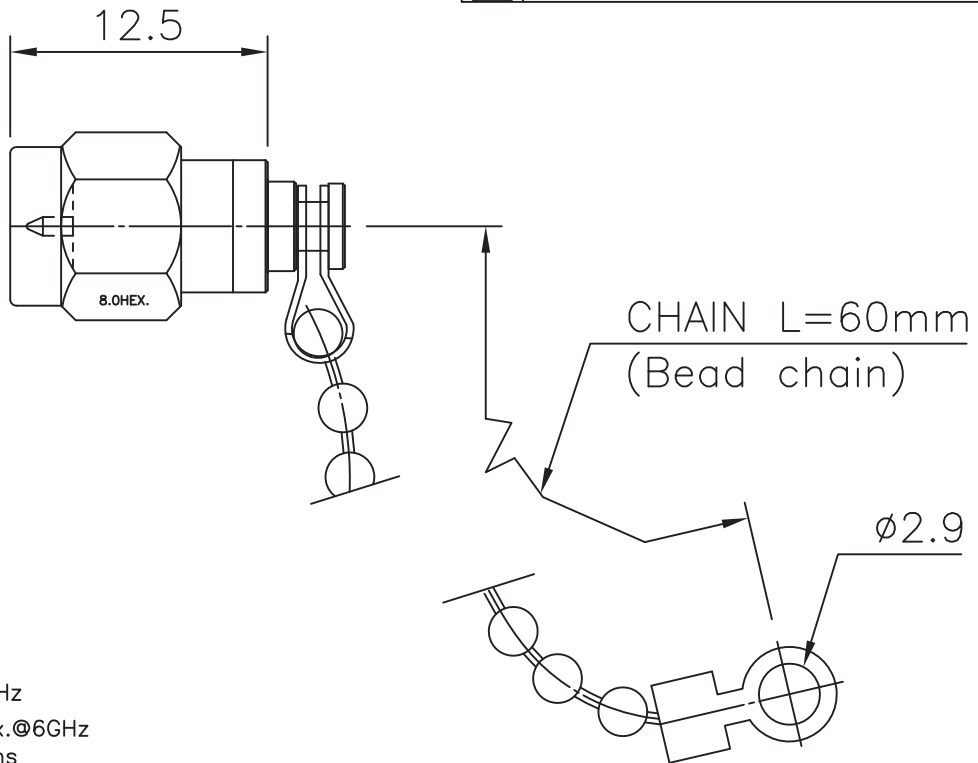

SPECIFICATIONS

Frequency Range----- DC-12GHz
 VSWR-----1.12:1max.@6GHz
 Impedance----- 50 Ohms
 Power rating ----- 1 Watts
 Oper Temp Range----- -35°C~+85°C

CONNECTOR----- Stainless/Passivated
 Coupling Cap----- Stainless/Passivated
 Conductors----- Brass/Gold plated
 Chain----- Brass/ Nickel plated

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	1S-901S-BC60		NAME	SMA-M-TERMINATION	APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
CUSTOMER		SCALE	UNIT mm		DESIGNED S.J.LEE
Cross RF web: www.crossrf.com		DWG NO.	1S-901S-BC60	DATE.	23/MAR/2007

D
C
B
A