


L-band Amplifiers



The 3140-3143 series of L-band amplifiers offer flat frequency versus gain characteristics over 850 to 2150MHz, 10MHz pass and DC block on both ports and gain options of 10, 15, 20 and 25dB.

These components are available with the following RF connector options: 50 Ω SMA, N-type, BNC and 75 Ω BNC or F-type.

Vector Diagram

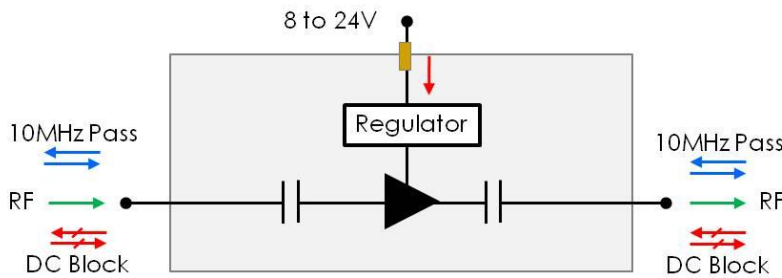

A-GABL1-3140 to 3143

Maximum acceptable operating parameters for reliable and safe operation

Parameter	Value	Comment
Input RF power	+16 dBm (40mW)	Max total RF power
Max voltage: RF ports	24V	DC block on all RF ports
Max voltage: DC bias input	24V	
Operating temperature	0 to 55 C	Indoor use only
Storage Temperature	-20 C to +75 C	
Humidity	85%	Non-condensing
Altitude	10,000 feet	Above Mean Sea Level

! Operation beyond these limits may cause instantaneous and permanent damage.



A-GABL1-3140 to 3143

L-band Gain Block Amplifiers



Typical performance over L-band operation, 850MHz to 2150MHz

Model Number	Gain (dB)	Gain vs. Frequency variation (dB)		Input return loss (dB)		Output return loss (dB)		1dB GCP (dBm)		IP3 (dBm)	NF (dB)
	Typical	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typical	Typical

Model 3141

A-GABL1-3141-S5S5	10±1.5	±0.3	±0.7	15	10	15	10	15	12	27	12
A-GABL1-3141-N5N5	10±1.5	±0.3	±0.7	15	10	15	10	15	12	27	12
A-GABL1-3141-B5B5	10±1.5	±0.4	±0.8	12	10	12	10	15	12	27	12
A-GABL1-3141-B7B7	10±1.5	±0.6	±0.8	10	6	10	6	15	12	27	12
A-GABL1-3141-F7F7	10±1.5	±0.8	±1.0	10	6	10	6	15	12	27	12

Model 3142

A-GABL1-3142-S5S5	15±1.5	±0.3	±0.7	19	14	19	14	15	12	28	10
A-GABL1-3142-N5N5	15±1.5	±0.3	±0.7	19	14	19	14	15	12	28	10
A-GABL1-3142-B5B5	15±1.5	±0.4	±0.8	18	14	18	14	15	12	28	10
A-GABL1-3142-B7B7	15±1.5	±0.6	±0.8	16	10	16	10	15	12	28	10
A-GABL1-3142-F7F7	15±1.5	±0.8	±1.0	16	10	16	10	15	12	28	10


Notes

- 10MHz insertion loss is typically 0.3dB, maximum 1dB.
- Worst case NF will not exceed the typical values by more than 2dB.
- Worst case IP3 will not be more than 3dB lower than typical.



ETL Systems Ltd, Coldwell Radio Station, Madley, Hereford, HR2 9NE, England

ETL Systems design, develop and manufacture specialist equipment for satellite ground stations. For a full description of the ETL product range, please see our website at www.etlsystems.com. This product range provides the basis for meeting your specific demands.



Tel +44 (0)1981 259020
 Fax +44 (0)1981 259021
info@etlsystems.com

A-GABL1-3140 to 3143

L-band Gain Block Amplifiers



Typical performance over L-band operation, 850MHz to 2150MHz

Model Number	Gain (dB)	Gain vs. Frequency variation (dB)		Input return loss (dB)		Output return loss (dB)		1dB GCP (dBm)		IP3 (dBm)	NF (dB)
	Typical	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typical	Typical

Model 3140

A-GABL1-3140-S5S5	20±1.5	±0.5	±0.7	15	10	15	10	15	12	25	8
A-GABL1-3140-N5N5	20±1.5	±0.5	±0.7	15	10	15	10	15	12	25	8
A-GABL1-3140-B5B5	20±1.5	±0.5	±0.8	12	10	12	10	15	12	25	8
A-GABL1-3140-B7B7	20±1.5	±0.7	±1.0	10	6	10	6	15	12	25	8
A-GABL1-3140-F7F7	20±1.5	±1.0	±1.25	10	6	10	6	15	12	25	8

Model 3143

A-GABL1-3143-S5S5	25±2.0	±0.5	±0.8	19	14	19	14	12	10	23	8
A-GABL1-3143-N5N5	25±2.0	±0.5	±0.8	19	14	19	14	12	10	23	8
A-GABL1-3143-B5B5	25±2.0	±0.5	±0.9	18	14	18	14	12	10	23	8
A-GABL1-3143-B7B7	25±2.0	±0.8	±1.2	16	10	16	10	12	10	23	8
A-GABL1-3143-F7F7	25±2.0	±1.0	±1.25	16	10	16	10	12	10	23	8


Notes

- 10MHz insertion loss is typically 0.3dB, maximum 1dB.
- Worst case NF will not exceed the typical values by more than 2dB.
- Worst case IP3 will not be more than 3dB lower than typical.




ETL Systems Ltd, Coldwell Radio Station, Madley, Hereford, HR2 9NE, England

ETL Systems design, develop and manufacture specialist equipment for satellite ground stations. For a full description of the ETL product range, please see our website at www.etlsystems.com. This product range provides the basis for meeting your specific demands.



Tel +44 (0)1981 259020
 Fax +44 (0)1981 259021
info@etlsystems.com

Physical dimensions

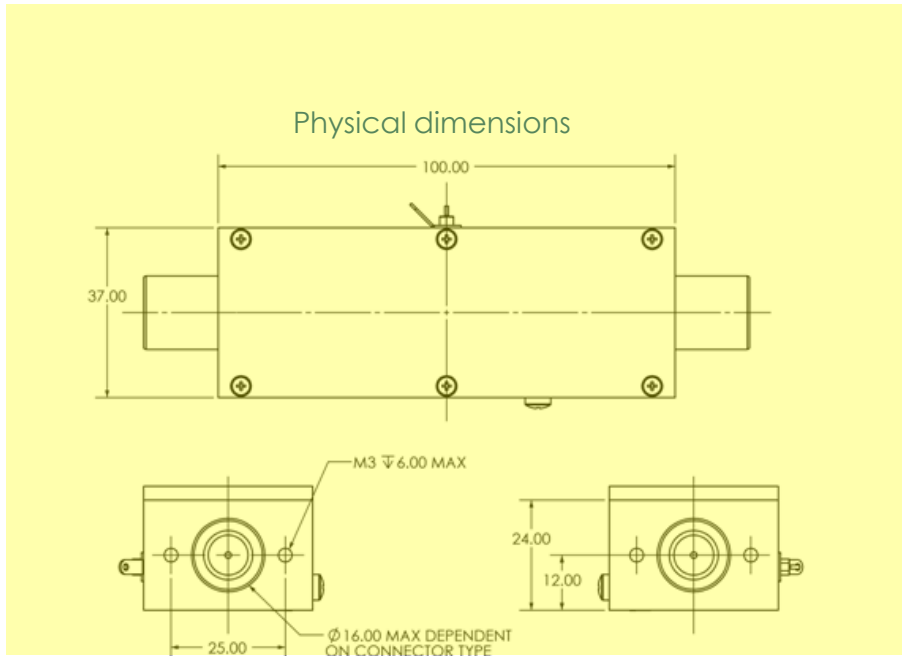

Alternative L-band Gain Block Amplifiers

Model Numbers	Bias Option*	Freq vs. Gain	Gain Options (dB)	Other features
3110-3114	External	Flat	10 to 30	DC block on all ports
3130-3134	In-line	Flat	10 to 30	DC pass on all ports
3135	In-line	Flat	25dB	DC block on input port only
3136	In-line	Flat	Unity	10MHz and DC pass on all ports
3204	External	Flat	Unity	10MHz pass and DC block on both ports
3140-3143	External	Flat	10 to 25	10MHz pass and DC block on both ports
3218, 3219 & 3210	External	Flat	20, 25 & 30dB options	10MHz and DC pass on all ports
3145-3147	External	3dB +ve slope	10, 15, 20	DC block on both ports
3207-3209 & 3139	In-line	Flat	10, 15, 20, 28	10MHz and DC pass on all ports
3148-3150	External	6dB +ve slope	10, 15, 20	DC block on both ports
3151-3153	In-line	3dB +ve slope	10, 15, 20	DC block on input port only
3154-3156	In-line	6dB +ve slope	10, 15, 20	DC block on input port only
3213, 3214 & 3222	External	Flat	10, 20, 30	LNB injection onto input port, DC block on output port
3223	External	Flat	25	DC block on all ports, extended frequency 850 to 2500 MHz



ETL Systems Ltd, Coldwell Radio Station, Madley, Hereford, HR2 9NE, England

ETL Systems design, develop and manufacture specialist equipment for satellite ground stations. For a full description of the ETL product range, please see our website at www.etlsystems.com. This product range provides the basis for meeting your specific demands.



Tel +44 (0)1981 259020
 Fax +44 (0)1981 259021
info@etlsystems.com