


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

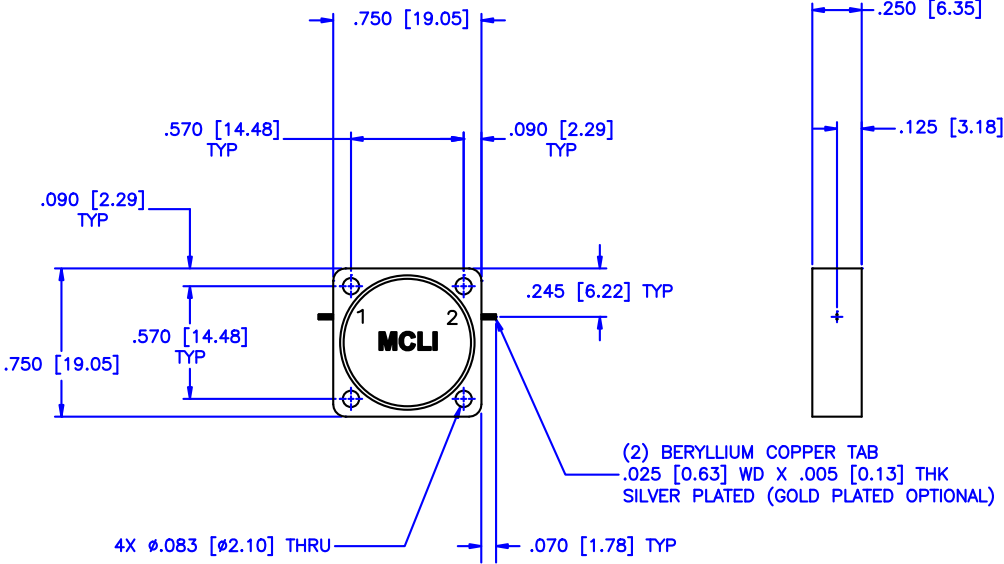

SPECIFICATIONS:

Frequency Range: 2.4–2.9 GHz  
 Isolation: 20dB Min.  
 Insertion loss: 0.50dB Max.  
 VSWR: 1.25:1 Max.  
 Power Average: 20 Watts  
 Operating Temperature: –20°C to +70°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 09-22-2011	DRAWING TITLE: DROP-IN ISOLATOR		
APPROVED: T. Nguyen		DATE: 09-22-2011	PART NO. DI-92		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 85891
					DO NOT SCALE THE DRAWING